

Photovoltaic Module

Monocrystalline36

KEY FEATURES



High module efficiency through superior manufacturing technology



No power loss thanks to improved temperature co-efficient caused by multi busbar solar cell



Strictly control the micro-crack of solar cells and the other non visible defect of internal modules



Module can bear snow loads up to 5400Pa and wind loads up to 2400Pa



Manufactured according to and certified international I Quality and Environment Management System



Using advanced low reflection and high light transmission glass and cell sheet surface cutting technology, in the weak light environment can also play a good performance.




Certificates

- IEC61215, IEC61730, CQC, CE, TUV
- ISO9001:2015
- ISO14001:2015
- ISO45001:2018



Warranties

- 15 years product warranty
- 25 years power warranty

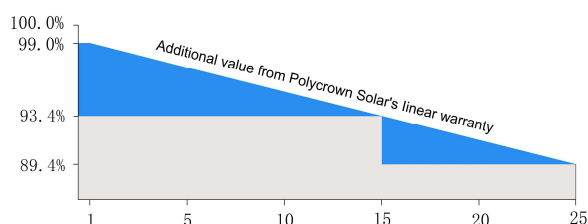

Ningbo Polycrown
Solar Tech Co, Ltd



No.363 Xiani Bridge, Xiaojia River Rd.,
Xiaogang Street, Ningbo, China



0086-13967820346



(86)574-56261160



ada@polycrown-solar.com



www.polycrown-solar.com

Electrical Characteristics



Polycrown Solar

Model	NS-100MH-36
Maximum Power at STC(Pmax)	100W
Optimum Operating Voltage (Vmp)	19.16V
Optimum Operating Current (Imp)	5.22A
Open-Circuit Voltage (Voc)	23.47V
Short-Circuit Current (Isc)	5.46A
Solar Cell Efficiency (%)	18.38
Solar Module Efficiency (%)	15.15
Operating Temperature	-40to85℃
Maximum System Voltage	DC1000V
Maximum Series Fuse Rating	15A
Power Tolerance	0~+3%
STC:Irradiance 1000W/m ² ,Modules Temperature 25℃,AM=1.5	



Temperature Coefficient

NOCT	45℃±2℃
Temperature Coefficient of Pmax	-0.34%/℃
Temperature Coefficient of VOC	-0.26%/℃
Temperature Coefficient of ISC	+0.05%/℃

Mechanical Characteristics

No. of cells	36(3×12)
Dimensions	1200mm*550mm*30mm
Weight	6.4kg ±3%
Front glass	3.2mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP68, three diodes
Connector	Plug and socket
Output cables	PV 4.0mm ²
1*40'HQ	36pcs/Pallet,2260pcs/ 40'HQ;

Engineering Drawings

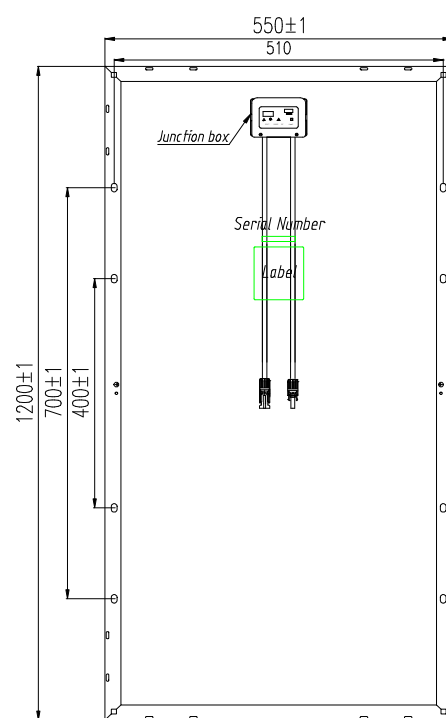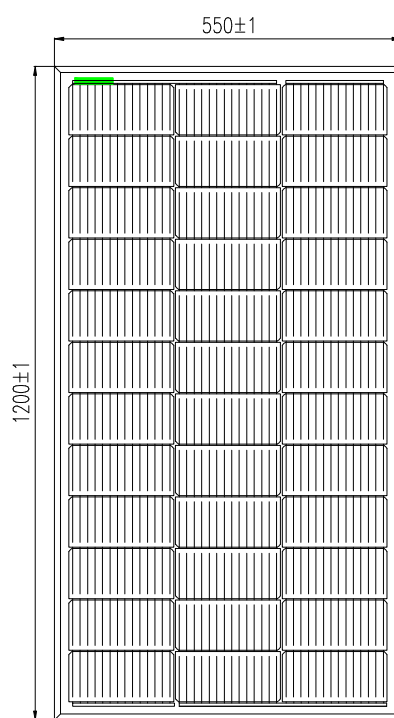

IV-Curves

