


SOLAR PV MODULE

144 HALF CUT TOPCon CELL

BIFACIAL TRANSPARENT BACKSHEET 560-590 W

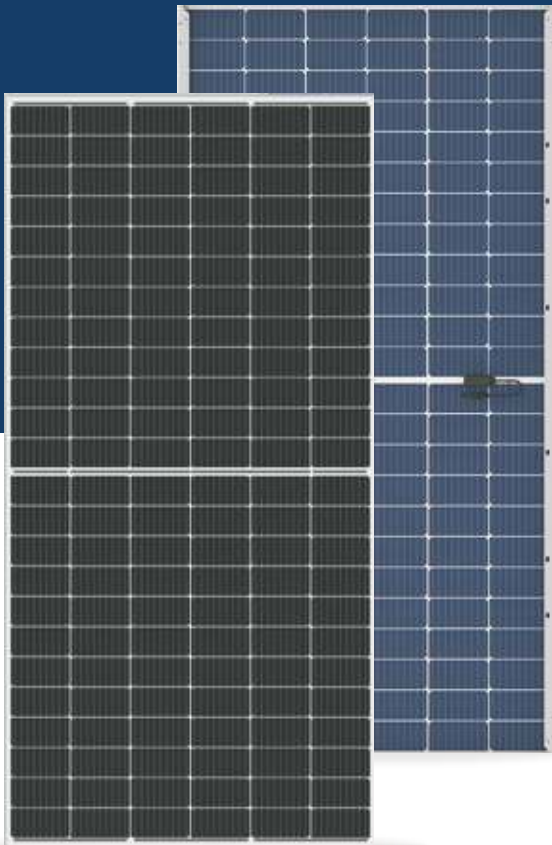

Transition to a Brighter Tomorrow



SMBB TECHNOLOGY

Better light trapping and current collection to improve module power output and reliability



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control



Higher Power Output

Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR



Auto Bussing & Soldering Technology

Induction based Improved soldering quality without pollution to module



Enhanced Mechanical Load

Certified to withstand wind load (2400 Pascal) and snow load (5400 Pascal)

High Performance Guarantee!



LINEAR POWER OUTPUT WARRANTY



PRODUCT WARRANTY

Suitable for



RESIDENTIAL



UTILITY



COMMERCIAL



OFF-GRID

Certification



IEC 61215 | IEC 61730 | IEC 61701 (Salt Mist) | IEC 62726 (Ammonia)

IEC 60068 (Sand & Dust) | IEC 61853- 1 & 2 (Panfile & IAM) | LID, LETID

IEC 62804 (PID) | UL 61730

MADE WITH PREMIER ENERGIES M10 CELLS

M10-182MM WAFER, IDEAL FOR ULTRA-LARGE POWER PLANT

AVAILABLE IN ALL BLACK RANGE



Electrical Characteristics (STC)

MODULE TYPE	PE-560 THB 144	PE-565 THB 144	PE-570 THB 144	PE-575 THB 144	PE-580 THB 144	PE-585 THB 144	PE-590 THB 144
	PEI-144-560 THB - M10	PEI-144-565 THB - M10	PEI-144-570 THB - M10	PEI-144-575 THB - M10	PEI-144-580 THB - M10	PEI-144-585 THB - M10	PEI-144-590 THB - M10
Maximum Power (Pmp)	560	565	570	575	580	585	590
Open Circuit Voltage (Voc)	51.18	51.22	51.26	51.30	51.34	51.38	51.42
Short Circuit Current (Isc)	13.40	13.50	13.61	13.71	13.83	13.93	14.04
Maximum Power Voltage (Vmp)	43.90	43.95	43.99	44.03	44.07	44.11	44.15
Maximum Power Current (Imp)	12.76	12.86	12.96	13.06	13.17	13.27	13.37
Module Efficiency %	21.66	21.86	22.05	22.24	22.44	22.63	22.83
Power Tolerance	0 to +5W						
Maximum System Voltage	1500V(UL & IEC)						
Maximum Series Fuse Rating	25 Amp						
*STC Irradiance 1000W/m ² , Module Temperature 25°C and AM 1.5				Measuring Tolerance: ±3%			

Electrical Characteristics (NOCT)

MODULE TYPE	PE-560 THB 144	PE-565 THB 144	PE-570 THB 144	PE-575 THB 144	PE-580 THB 144	PE-585 THB 144	PE-590 THB 144
	PEI-144-560 THB - M10	PEI-144-565 THB - M10	PEI-144-570 THB - M10	PEI-144-575 THB - M10	PEI-144-580 THB - M10	PEI-144-585 THB - M10	PEI-144-590 THB - M10
Maximum Power (Pmp)	512	416	419	423	427	430	434
Open Circuit Voltage (Voc)	47.82	47.86	47.90	47.93	47.97	48.01	48.61
Short Circuit Current (Isc)	10.68	10.76	10.85	10.93	11.02	11.10	11.19
Maximum Power Voltage (Vmp)	40.74	40.78	40.82	40.86	40.89	40.93	40.97
Maximum Power Current (Imp)	10.11	10.19	10.27	10.35	10.43	10.51	10.59
Module Efficiency %	15.95	16.09	16.23	16.38	16.52	16.66	16.76
*NOCT- Irradiance 800 W/m ² , AM 1.5, Ambient Temperature 25°C & Wind speed 1m/s				Measuring Tolerance: ±3%			




GAIN		PE-560 THB 144	PE-565 THB 144	PE-570 THB 144	PE-575 THB 144	PE-580 THB 144	PE-585 THB 144	PE-590 THB 144
		PEI-144-560 THB - M10	PEI-144-565 THB - M10	PEI-144-570 THB - M10	PEI-144-575 THB - M10	PEI-144-580 THB - M10	PEI-144-585 THB - M10	PEI-144-590 THB - M10
10%	Power Pmp	616.0	621.5	627.0	632.5	638.0	643.5	649.0
20%	Power Pmp	672.0	678.0	684.0	690.0	696.0	696.0	708.0
30%	Power Pmp	728.0	734.5	741.0	747.5	754.0	754.0	767.0

- Bifacial gains depends on the power plant design & albedo of installation site
- Power Bifaciality=Pmax(Rear)/Pmax(Front) are tested under STC

Measuring Tolerance: ±3%

Temperature Characteristics

Pmax Temperature Coefficient Up to	-0.30%/°C
Voc Temperature Coefficient Up to	-0.27%/°C
Isc Temperature Coefficient	0.04%/°C
Operating Temperature	-40°C To + 85°C
Nominal Operating Cell Temperature	42 ± 3° C

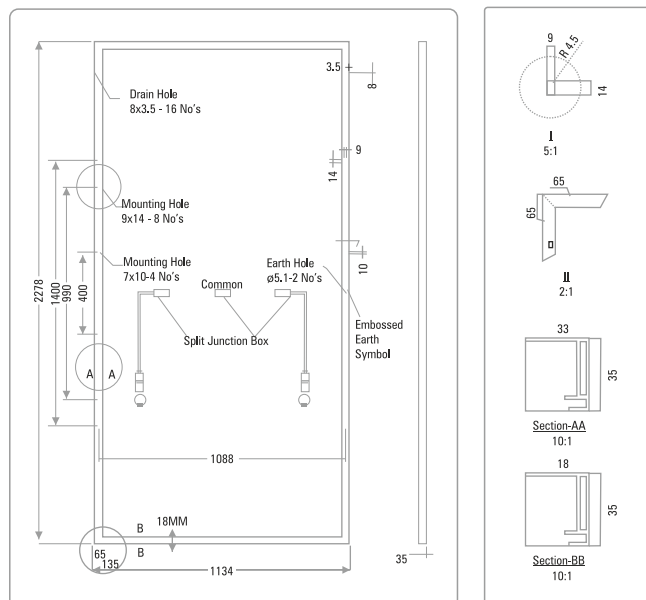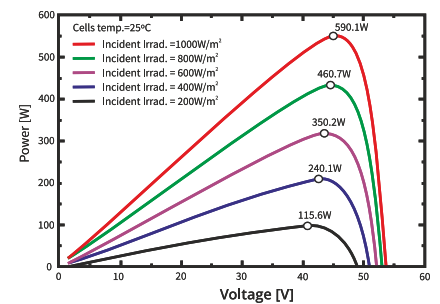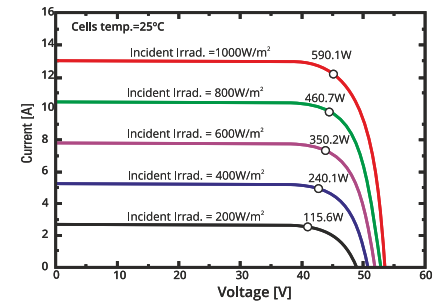

Mechanical Specifications

External Dimensions	2278(±2mm) x 1134 (±2mm) x 35(±1mm)
Weight	28 (± 3%) Kg
Solar Cells	10BB TOPCon - Crystalline 91mm x 182mm ± 1mm
Front Glass	3.2 mm, High Transmission, Low Iron, Tempered Glass
Rear Cover	High Transparent / Black / White Backsheet
Frame	Anodized Aluminium Alloy (Silver/Black)
Junction Box	3 Split, IP 68 Rated
Connector	Mc4 Compatible
Mechanical Load	5400 Pa For Snow Load, 2400 Pa Wind Load
Fire Performance	TYPE 4 (UL 61730) Or Class C (IEC 61730)
Output Cable	4.0 mm ² 400 mm Length

Frame Profile 35x33(Long) & 35x18mm(Short)
Also Available 30x30(Long) & 30x15mm(Short)

Packing Configuration

Container	20'HQ	32'HQ	40'HQ
Pieces per Pallet	31	31	31
Pallets per Container	8	20	20
Pieces per Container	248	496	620

FIRST YEAR
DEGRADATION
< 1.0%

YEAR 2-30 POWER
DEGRADATION
< 0.40%

