T BRANCH 4 to 1 10000V CONNECTOR


CE certification Electric conductivity | Fire retardant

Waterproof and dustproof



Precision craftsmanship Safety and reliability

Tinned copper



Waterproof and

dust proof



High and low

temperature resistance



Environmental

protection



Highly Flame

PV004-T4

High reverse

resistance

T-BRANCH 1000V SERIES

PV004-T3



·Type

PPO

PV004-T4

·Insulation Materia

·Rated Voltage

-40°C~+85°C

·Rated Current

30A

PV004-T2



PARAMETER

Manual measurement, there are errors, to prevail in kind



·Contact Materials

Tinned copper

·Contact Resistance

·Adapter Connector

≤0.5MΩ

IP65


·Flame Class

UL94-V0

1000V DC PV004/PV005 ·Ambient Temperature ·Protection Degree

108 mm Φ4.9 13.1mm 71.3mm 80.4mm Φ4.9

四汇一汇流简示图

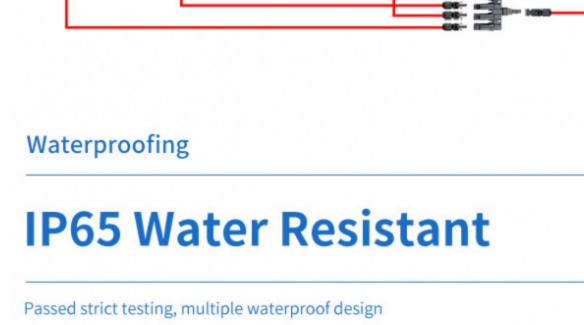


O-RINGS

The connector socket adopts

invading

high quality sealing ring to effec-

tively prevent dust and rain from



PPO SHELL The shell is made of high quality PPO material, fire retardant, high and low temperature resistance, UV resistance, corrosion resistance,

O-rings safe and durable



14 宁波市科技创新协会

会员单位

PRODUCT PACKAGING Product packaging diversity reference, can be customized according to demand boxes, bags, hanging cards, etc.packages.

🔷 пвеє

挂牌企业

浙江品思泰克科技有限公司









