

HIGH PERFORMANCE MONOCRYSTALLINE PERC MODULE

FCP132-8-655M-675M

| | |
|--|--|
| 132 CELL Mono PERC Module | 655-675Wp Power Output Range |
| 1500VDC Maximum System Voltage | 21.7% Maximum Efficiency |



* As there are different certification requirements in different markets, please contact your local Fortune CP sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

FORTUNE CP

Fortune CP is a leading EPC and global supplier of high-performance solar photovoltaic modules and provider of business solutions for residential, commercial and utility-scale projects.

Regus House, Admirals Park, Dartford, DA2 6QD, United Kingdom
Tel: +441322303070
E-mail: sales@fortuneecp.co.uk Website: www.fortuneecp.com




KEY SALIENT FEATURES

- Industry leading lowest thermal co-efficient of power
- Industry leading 12 years product warranty
- Excellent low irradiance performance
- Excellent PID resistance
- Positive power tolerance of 0~+3%
- Dual stage 100% EL Inspection warranting defect-free product
- Module Imp binning radically reduces string mismatch losses
- Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
- Comprehensive product and system certification
 - ◆ IEC61215:2016; IEC61730-1/-2:2016;
 - ◆ ISO 9001:2015 Quality Management System
 - ◆ ISO 14001:2015 Environmental Management System
 - ◆ ISO 45001:2018 Occupational Health and Safety Management System


LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 25 year Linear Power Warranty

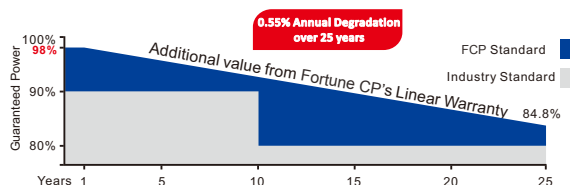

★ Please check the valid version of Limited Product Warranty which is officially released by Fortune CP Ltd

Dimensions of PV Module Unit: mm

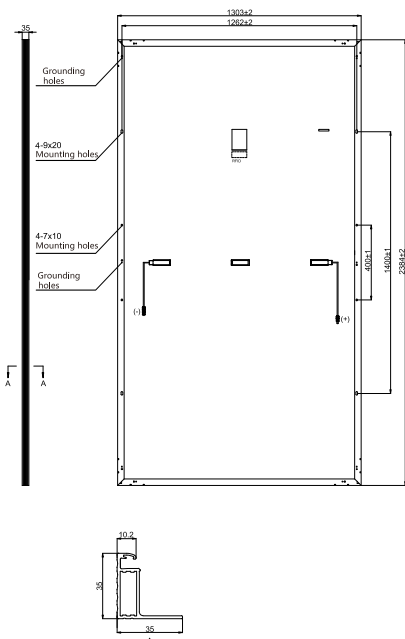

ELECTRICAL DATA (STC)

| Model Number | FC132-8-655M | FC132-8-660M | FC132-8-665M | FC132-8-670M | FC132-8-675M |
|-------------------------------|--------------|--------------|--------------|--------------|--------------|
| Rated Power in Watts-Pmax(Wp) | 655 | 660 | 665 | 670 | 675 |
| Open Circuit Voltage-Voc(V) | 45.55 | 45.75 | 45.95 | 46.15 | 46.35 |
| Short Circuit Current-Isc(A) | 18.28 | 18.33 | 18.38 | 18.43 | 18.48 |
| Maximum Power Voltage-Vmpp(V) | 37.94 | 38.12 | 38.30 | 38.48 | 38.66 |
| Maximum Power Current-Impp(A) | 17.27 | 17.32 | 17.37 | 17.42 | 17.47 |
| Module Efficiency (%) * | 21.1 | 21.2 | 21.4 | 21.6 | 21.7 |

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

* Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

| Model Number | | | | | |
|--------------------------------|-------|-------|-------|-------|-------|
| Maximum Power-Pmax (Wp) | 496.2 | 500.0 | 503.8 | 507.6 | 511.5 |
| Open Circuit Voltage-Voc (V) | 42.36 | 42.55 | 42.73 | 42.92 | 43.10 |
| Short Circuit Current-Isc (A) | 14.99 | 15.03 | 15.07 | 15.11 | 15.15 |
| Maximum Power Voltage-Vmpp (V) | 35.21 | 35.38 | 35.54 | 35.71 | 35.88 |
| Maximum Power Current-Impp (A) | 14.09 | 14.13 | 14.17 | 14.21 | 14.25 |

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

| | |
|--------------------|---|
| Solar cells | Monocrystalline |
| Cell configuration | 132 cells (6×11+6×11) |
| Module dimensions | 2384×1303×35mm |
| Weight | 33.5kg |
| Superstrate | High Transmission, Low Iron, Tempered ARC Glass |
| Substrate | White Back-sheet |
| Frame | Anodized Aluminium Alloy, Silver Color |
| J-Box | Potted, IP68, 1500VDC, 3 Schottky bypass diodes |
| Cables | 4.0mm ² , Positive(+)350mm, Negative(-)230mm (Connector Included) or customized length |

TEMPERATURE & MAXIMUM RATINGS



| | |
|---|-------------|
| Nominal Module Operating Temperature (NMOT) | 44°C±2°C |
| Temperature Coefficient of Voc | -0.25%/°C |
| Temperature Coefficient of Isc | 0.04%/°C |
| Temperature Coefficient of Pmax | -0.34%/°C |
| Operational Temperature | -40°C~+85°C |
| Maximum System Voltage | 1500VDC |
| Max Series Fuse Rating | 30A |
| Limiting Reverse Current | 30A |

PACKAGING CONFIGURATION

| | |
|--|----------------|
| | 40ft(HQ) |
| Number of modules per container | 558 |
| Number of modules per pallet | 31 |
| Number of pallets per container | 18 |
| Packaging box dimensions (LxWxH) in mm | 1320×1120×2515 |
| Box gross weight[kg] | 1065 |

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2023 Fortune CP. All rights reserved. Contents included in this datasheet are subject to change without notice. No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.

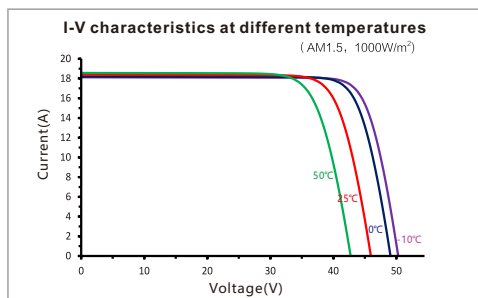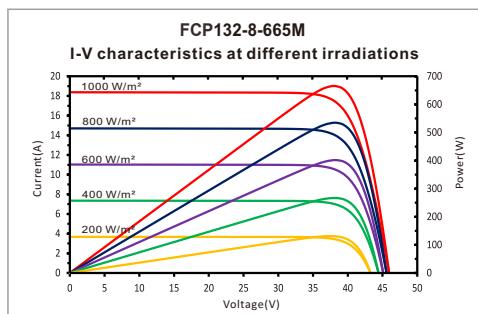

Our Partners:

