

SERIES **N** 5

620-640W Mono

156 Half-Cell Layout

M10 N-TYPE Cell



LECO N-TYPE
Cell Technology



Half Cut Cell
Technology



SMBB Technology



Excellent
Anti-PID
Low LID
Performance




Less Hot Spot
Shading Effects



Higher Power Output
Lower BOS & LCOE

Linear Performance Warranty

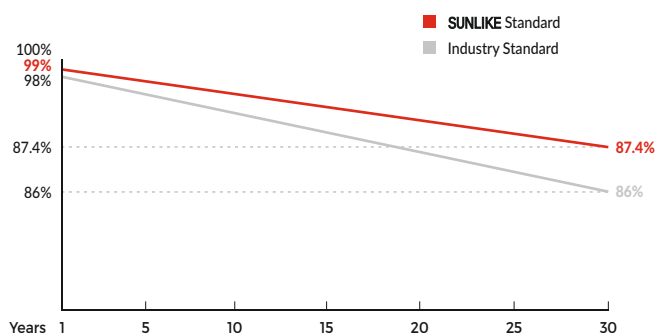

Insured By



Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard Quality
- IEC61701/IEC62716 Salt/Mist/Ammonia Tests



SUNLIKE SOLAR CO., LTD.

Add: No. 509 Datong Road, Wuxi, Jiangsu, China


T: +86 510 8899 0686; Email: solar@sunlikesolar.com

www.sunlikesolar.com

Mono I 620 - 640W

MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	156 (6x26)
Dimensions	2465 x 1134 x 35mm
Weight	30.0kg
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy (reinforced high-load optional)
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	250mm (+) / 350mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	Front 5400Pa / Rear 2400Pa

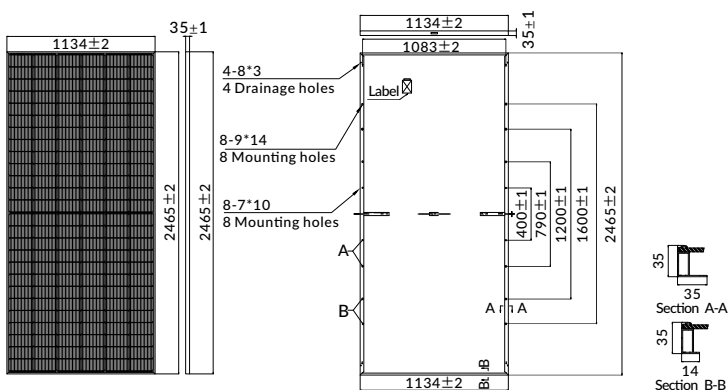

ELECTRICAL PARAMETERS

POWER CLASS	LNVH-620N		LNVH-625N		LNVH-630N		LNVH-635N		LNVH-640N	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	620W	467W	625W	471W	630W	475W	635W	479W	640W	483W
Open Circuit Voltage (Voc)	55.37V	52.82V	55.56V	52.98V	55.74V	53.13V	55.92V	53.29V	56.04V	53.44V
Short Circuit Current (Isc)	14.34A	11.53A	14.40A	11.59A	14.46A	11.65A	14.52A	11.71A	14.60A	11.77A
Voltage at Maximum power (Vmpp)	45.86V	42.61V	46.02V	42.74V	46.19V	42.87V	46.35V	43.00V	46.51V	43.13V
Current Maximum Power (Imp)	13.52A	10.96A	13.58A	11.02A	13.64A	11.08A	13.70A	11.14A	13.76A	11.20A
MODULE EFFICIENCY (%)	22.18%		22.36%		22.54%		22.72%		22.90%	



STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G

PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	32	32
Pallets per container	4	16
Pieces per container	128	512

I-V CURVE

LNVH-620N/I-V

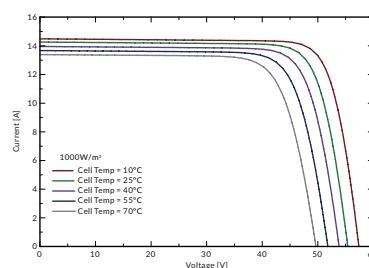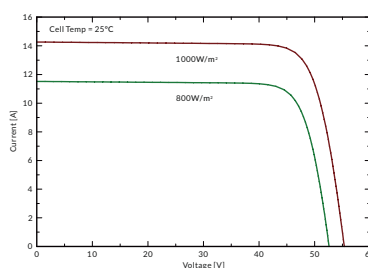

OPERATING CHARACTERISTICS

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	25A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Note: The specifications, data and technical characteristics provided in this data sheet are subject to changes due to continuous R&D, product innovation and improvement. **SUNLIKE SOLAR** reserves the right to modify the information any time without prior notice.