


## 300 Watt SOLAR MODULE

- ▶▶ Tested To UL:1703
- ▶▶ CSA certified
- ▶▶ Resistance to salt mist and ammonia corrosion
- ▶▶ Performance tests under extreme conditions
- ▶▶ Wind and snow load testing



### ▶▶ Key Features

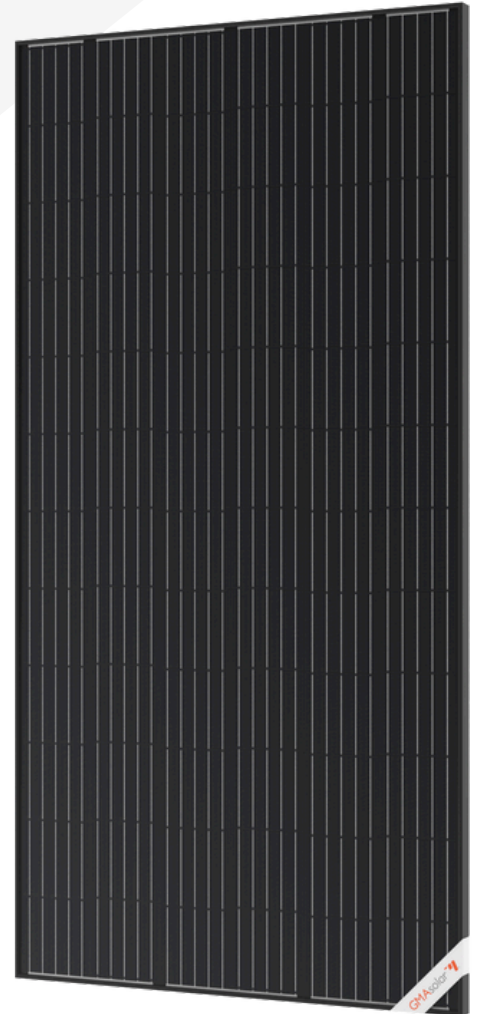

**Higher Energy Efficiency**  
Monocrystalline technology harnesses reflected light.



**Improved Performance in Low Light**  
Optimal operation in low irradiation conditions.



**PID Protection**  
Minimized power loss due to degradation effects.



**High Climate Resilience**  
Wind load resistance of 2400Pa and snow load resistance of 5400Pa.



**Longer Lifespan**  
25-year warranty with over 85% power output.



**Easy Installation & Compatibility**  
Lightweight design for easier handling and installation.



## 300 Watt SOLAR MODULE

### > Electrical Parameters at STC

Peak Power	P <sub>max</sub> (W)	300
Maximum Power Voltage	V <sub>mp</sub> (V)	32.15
Maximum Power Current	I <sub>mp</sub> (A)	9.33
Open-circuit voltage	V <sub>oc</sub> (V)	39.61
Short-circuit current	I <sub>sc</sub> (A)	9.78
Module Efficiency	η(%)	18.3

Values at standard test conditions STC (Air mass AM 1.5, Irradiance 1000W/sqm, Cell temperature 25°C)  
Power Measurement Tolerance: 0 / +3%

### > Mechanical Data

Solar Cell (Type / Dimension)	Mono-crystalline solar cells / 156.75 x 156.75
Cell (Quantity / Orientation)	60 cells / 6 x 10
Module Dimension (L x W x H)	1650 X 992 X 35 mm
Weight	19 kg
Frame (material)	Anodized aluminum / Silver
Front glass (material/ thickness)	High transmission low-iron tempered glass / 3.2mm
Backsheet (material)	Fluoropolymer coating / PET / polyolefin
Mechanical Load	Wind/Snow 2400/5400 Pa, Hail 23m/s, 7.53g
Junction Box (protection degree)	≥IP 65
Junction Box (diode)	Three (3) bypass diodes
Output Cables (Length/cross-sectional area)	1000 mm length, 10 AWG PV cable, UV protected
Connector (type / protection degree)	MC4 / IP68 rated

### > Temperature Coefficients

Nominal Operating Cell Temp. (NOCT)	45 +/- 2 °C
Voltage Temperature Coefficient (VOC)	-0.35% / °C
Current Temperature Coefficient (Isc)	0.04% / °C
Power Temperature Coefficient (Pmax)	-0.45% / °C


### > Maximum Ratings

Operational Temperature	-40°C to +85°C
Maximum System Voltage	600VDC
Max Series Fuse Rating	15A

### > Warranty & Certifications

Certification	Tested to UL 1703
Fire Rating	Type 2
Warranty	25 years Power Output Warranty 10 years 90%, 25 years 85% 10 years Product Warranty on Materials

### > Mechanical Drawing

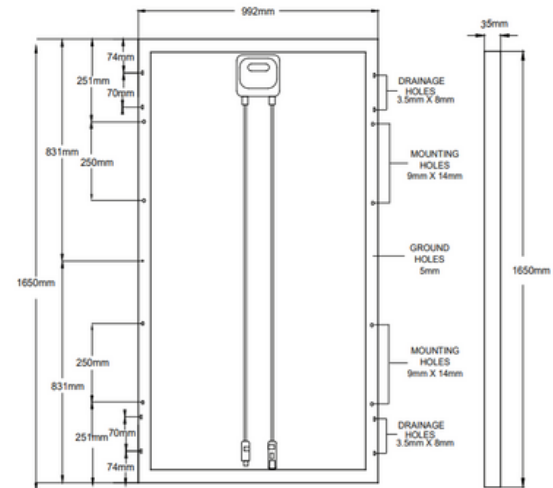

### > I-V Curve

