

N-TYPE MONO CRYSTALLINE HALF CUT MODULE

460 / 465 / 470 / 475 / 480 / 485 Watts

Lynx Series



Overview

N-type solar cells (TOPCon) are seen as the technology of the future. N-type (TopCon) technology guarantees high performance and low degradation of the PV module, substantially improving the results and the yield in the time. "Lynx" Series module is the ideal solution for end users who want a Quality PV & reliable product over time and a fast turnaround on their investments.

Key Benefits

	Zero light induced Degradation		30 Years Limited Product Warranty
	Higher yield per surface area		Low Pmax Temperature Coefficient
	Low LCOE		Higher Light Conversion



Guaranteed mechanical resistance to severe weather conditions



Positive Tolerance




100 % electro-luminescence tested

Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE Fire safety Class C according to UL790
Wind and Snow Static Loads	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Withstanding Hail	Maximum Diameter of 25 mm with impact speed of 23 m/s
Power Tolerance	Guaranteed +0/+5W (STC condition)
Warranties	<ul style="list-style-type: none"> • 30-year limited product warranty • 15-year manufacturer warranty on 92.70% of the nominal performance • 30-year transferable linear power output warranty

Linear Performance Warranty

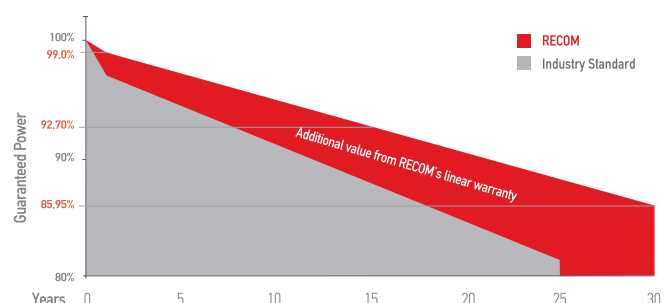

First Year Output	$\geq 99.0\%$	2-30 Year Decline	$\leq 0.45\%$	30 Year Output	$\geq 85.95\%$
-------------------	---------------	-------------------	---------------	----------------	----------------

Lynx

N-TYPE MONO CRYSTALLINE HALF CUT MODULE

RCM-xxx-7NE (xxx=460-485)

Electrical Characteristics

POWER CLASS ⁽¹⁾			460		465		470		475		480		485	
Testing Condition			STC ⁽²⁾	NMOT ⁽³⁾	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power	Pmax	[Wp]	460	347,2	465	351,0	470	354,8	475	358,5	480	362,3	485	366,1
Maximum Power Voltage	Vmp	[V]	35,03	32,56	35,18	32,70	35,33	32,80	35,48	32,98	35,63	33,10	35,78	33,25
Maximum Power Current	Imp	[A]	13,14	10,66	13,22	10,73	13,31	10,82	13,39	10,87	13,48	10,95	13,56	11,01
Open Circuit Voltage	Voc	[V]	42,34	40,10	42,49	40,24	42,64	40,39	42,79	40,53	42,94	40,67	43,09	40,81
Short Circuit Current	Isc	[A]	13,89	11,28	13,98	11,36	14,09	11,44	14,16	11,50	14,26	11,58	14,34	11,65
Module Efficiency	Eff	[%]	21,2		21,5		21,7		21,9		22,2		22,4	
Maximum Series Fuse	IR	[A]	25											
Maximum System Voltage	VSYS	[V]	1500V DC											


(1) Measurement Tolerances: I_{sc} & V_{oc} (± 3%) - Power Classification 0/+5W
(2) STC (Standard Testing Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5
(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m², NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

Mechanical Data


Dimensions	1909 mm x 1134 mm x 30 mm
Weight	24,0 Kg
Cell Type	N-Type - (2 x 60 Pcs) - M10
Front Glass	3.2 mm Tempered and low iron glass
Rear Side	Anti-aging film
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass diodes
Connector	MC4 compatible
Output cable	4mm ² - Length: 1200 mm or can be customized

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

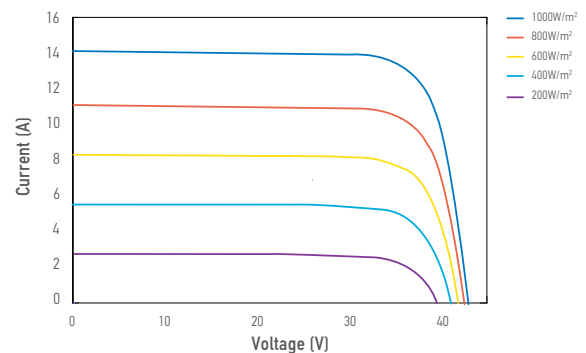

Dimensions

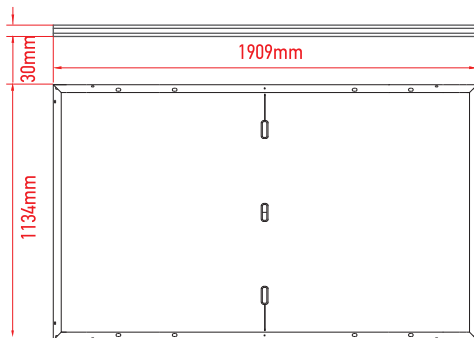

RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

Temperature Characteristics

P _{max} Temperature Coefficient	-0.30% / °C
V _{oc} Temperature Coefficient	-0.25% / °C
I _{sc} Temperature Coefficient	+0.046% / °C
Operating Temperature	-40~+85 °C
Nominal Operating Module Temperature (NMOT)	45 ± 2 °C

Packing Configuration

Container	40'HC
Pieces per Pallet	37
Pallets per Container	24
Pieces per Container	(37+37) x 12 = 888 pcs