



# DCH - HM6HBM1

MONOCRYSTALLINE PERC  
HALF-CELL MODULE

## DCH-HM6HBM1 - 370/375

**120 CELL**

Mono PERC HC Module 9BB

**370/375 W<sub>p</sub>**

Power Output Range

**20.31/20.59%**

Efficiency

**0 /+5 W**

Positive Power Tolerance


## Key Features



High performance in low irradiance conditions



Innovative World-Class quality products and high reliability due to stringent quality control and following international standards



Price Competitiveness in all project ranges



12 years product warranty



Suitable for harsh environments, such as coasts, deserts and lakes



PID resistant and free of snails trails



Comprehensive Certificates

- IEC61215, IEC61730-1/2, IEC61701, IEC62716, IEC60068-2-68
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS18001: 2011 Occupational health and safety management systems



### DCH Energy GmbH

DCH Energy since its establishment in Germany has achieved a recognizable position as photovoltaic technology and solution provider through a number of investments in Germany. Both the components and engineering used by DCH Energy are recognized worldwide. In the development of the projects, not only the construction management and operation are performed according to international standards. The DKB bank, the largest financing institute in Germany has also financially approved DCH Energy Products and technology for a number of projects. DCH Energy also owns solar assets in Europe, Asia and Africa. We have a global presence with more than 400 MWp of fully operational PV projects, including both ground mounted and rooftop solar projects. Our capabilities span the full PV supply chain, from ingot-wafer-cell-module production to turnkey installation and financing.

In der Wehbach 17, 57080 Siegen, Germany

Tel: +49 271 3878100

Fax: +49 271 38781022


E-mail: [info@dch-group.de](mailto:info@dch-group.de)

Website: [www.dch-group.de](http://www.dch-group.de)



## LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty / 25 Year Linear Performance Warranty

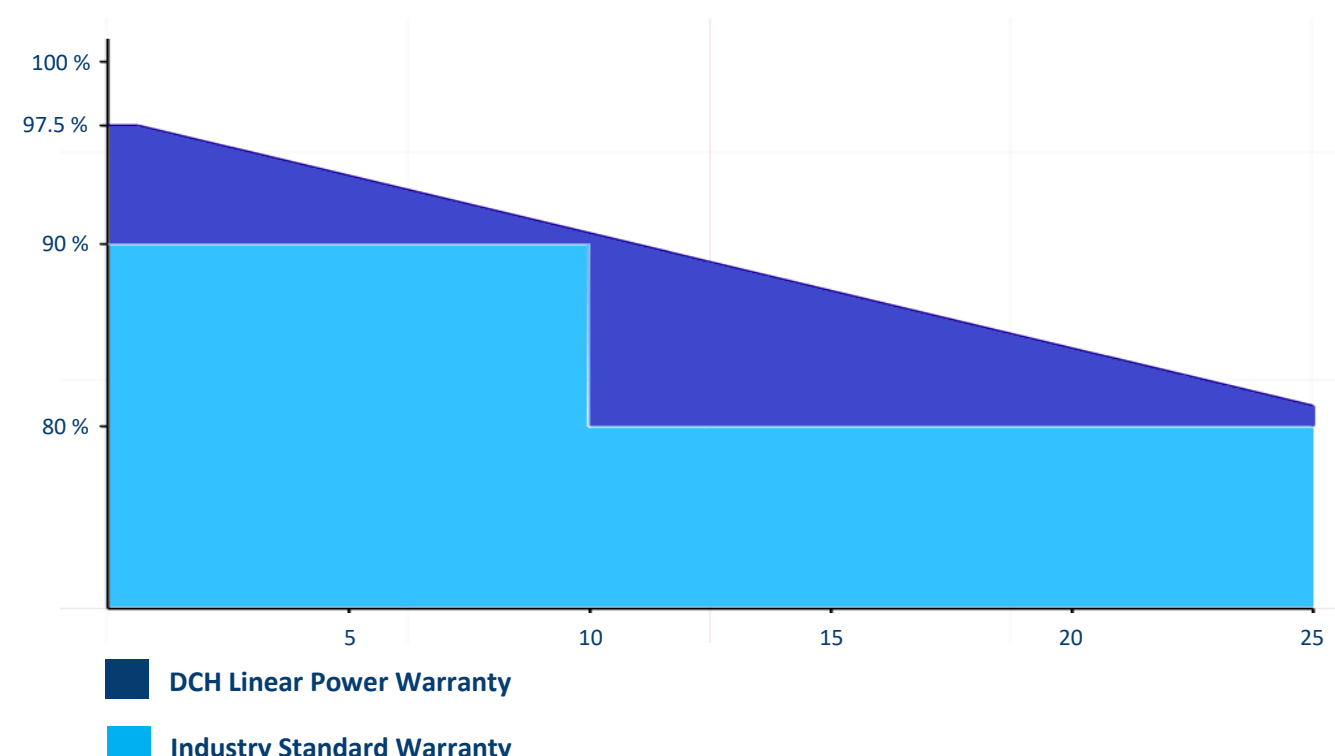

**ELECTRICAL DATA (STC)**

Model Number	DCH-HM6HBM1 - 370	DCH-HM6HBM1 - 375
Nominal Power	370 Wp	375 Wp
Voltage at max. power Vmpp	34.42 V	34.63 V
Current at max. power Impp	10.75 A	10.83 A
Open circuit voltage Voc	40.81 V	41.08 V
Short circuit current Isc	11.54 A	11.62 A
Efficiency	20.31 %	20.59 %

Data applies to Standard Test Conditions (STC): Irradiance 1000W/m<sup>2</sup> with an AM of 1,5 and a cell temperature of 25°C

**ELECTRICAL DATA (NMOT)**

Model Number	DCH-HM6HBM1 - 370	DCH-HM6HBM1 - 375
Nominal Power	277.47 Wp	281.16 Wp
Voltage at max. power Vmpp	32.08 V	32,28 V
Current at max. power Impp	8.65 A	8,71 A
Open circuit voltage Voc	38.68 V	38,93 V
Short circuit current Isc	9.36 A	9,42 A

NMOT: Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s.

**MECHANICAL DATA**

Solar Cells	Mono PERC, Half 166 x 83 mm
Cells per module	120 Cells (6*10*2 matrix)
Dimensions (tolerance +/- 1 mm)	1755 mm x 1038 mm x 35 mm
Weight	20.5 kg
Laminat/Glas	3,2 mm Tempered Coated
Frame	35 mm, silver anodized Al alloy
Back side colouring	White
Max. Wind load	2400 Pa
Snow load	5400 Pa
Junction Box	Protection type: IP67 with spring-cage term

**TEMPERATURE & MAXIMUM RATINGS**

Nominal power tolerance	0~+5%
Temperature Coefficient Pm%/°C	-0.347 %/°C
Temperature Coefficient Voc%/°C	-0.263 %/°C
Temperature Coefficient Isc%/°C	0.057 %/°C
Maximum System Voltage	1500 VDC
Operating temperature range	-40 ~ +85°C
Maximum series fuse rating	20 A


**WARRANTY**

12 years Product Warranty  
25 years Performance Warranty



**PACKAGING**

31pcs/pallet 806pcs/ 40'HQ

**DRAWINGS & DIMENSIONS**

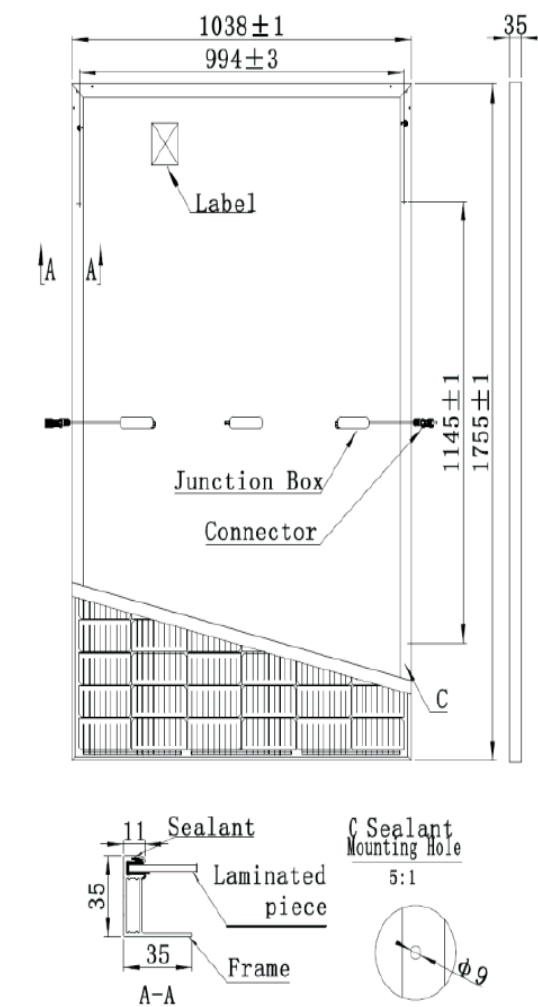

**I-V CURVE CHARACTERISTICS**

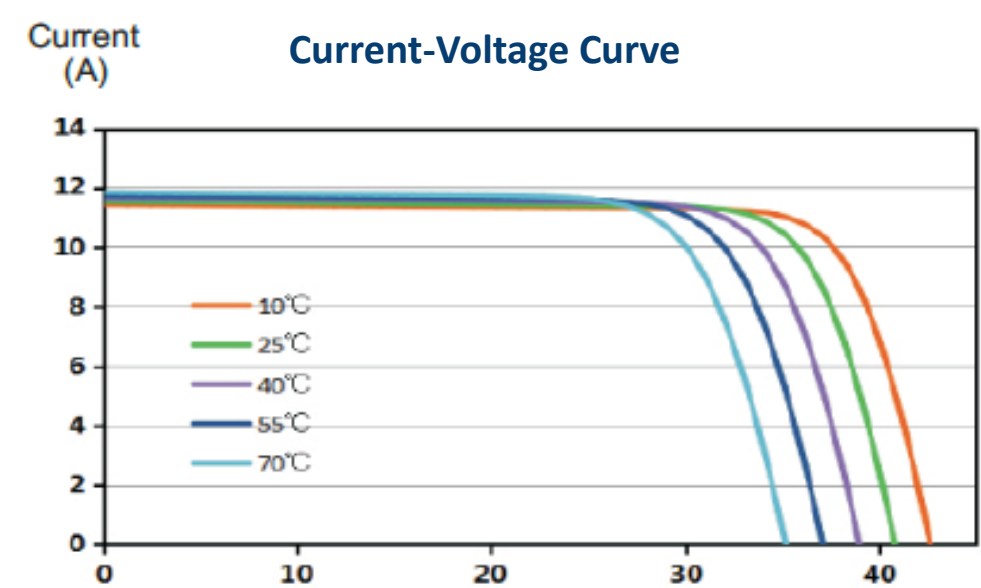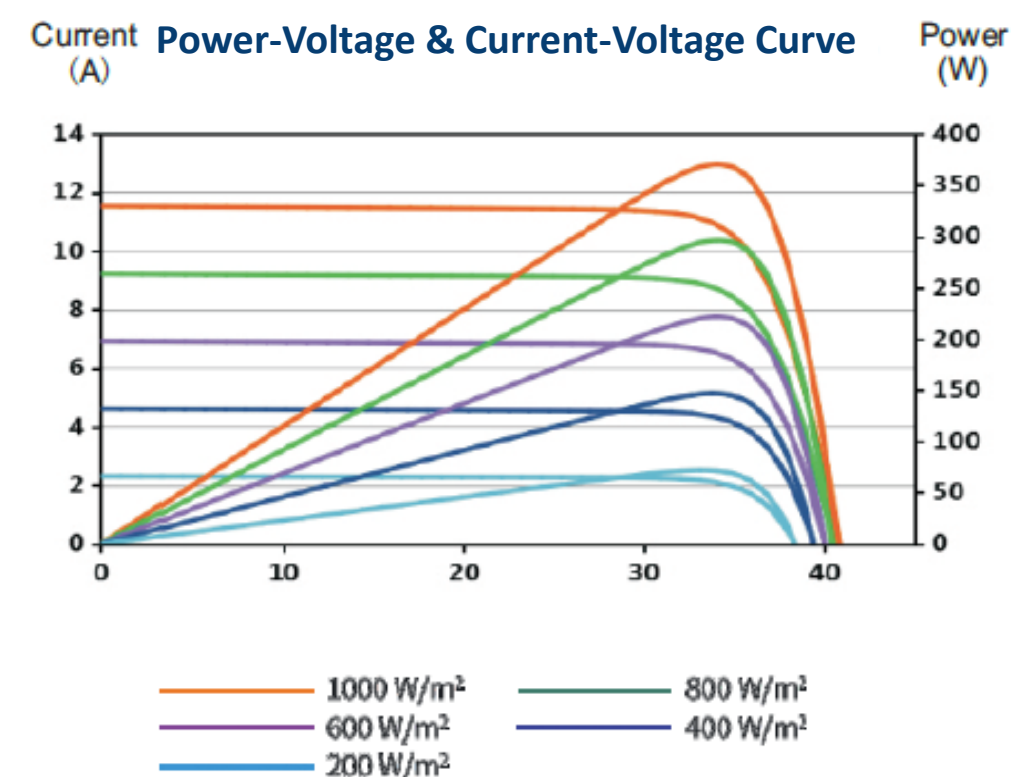

In der Wehbach 17, 57080 Siegen, Germany  
Tel: +49 271 3878100 Fax: +49 271 38781022



Engineered in GERMANY