



19.4% EFFICIENCY

UP TO 340 W

60 CELLS



EUPD RESEARCH

TOP BRAND PV

MODULES

GERMANY

2018

EUPD RESEARCH

TOP BRAND PV

MODULES

AUSTRALIA

2018



PID Resistant

Intense testing to ensure long-term durability



Exceeds the IEC standard 3 times over

Because standards are there to be surpassed.



99% relative efficiency at weak-light

Because a 3% increase in yield makes a difference.



25 year linear performance guarantee

15 year product warranty.



10 years of WINAICO quality modules


WINAICO has been providing the global market with quality solar panels for over 10 years.



Water drainage design

Avoid water and dust accumulation to prevent power degradation and hotspot problems.

Dimensions

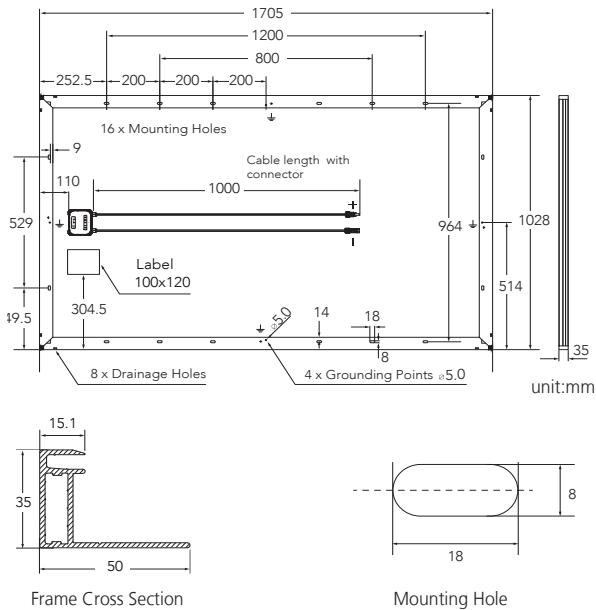

Mechanical data

Cell	Monocrystalline 161.7 x 161.7 mm
Quantity and wiring of cells	60 in series
Dimensions	1,705 x 1028 x 35 mm (67.13 x 40.47 x 1.38 in)
Weight	20.6 kg (45.8 lbs)
Glass thickness	3.2 mm (0.13 in)
Frame	Black anodised aluminium
Junction box	IP 67
Connector type	MC4 (PV-KBT4/PV-KST4) IP68; QC4.10 IP67
Module fire performance	Type 4
Fire safety class	C

Operating conditions

Operating temperature	-40 °C to +85 °C / -40 °F to +185 °F
Maximum system voltage IEC/UL	1,000 V/1,000 V
Maximum series fuse	20A
Maximum design load (+) / (-)	3,600 Pa / 2,400 Pa
Maximum test load (+) / (-)	5,400 Pa / 3,600 Pa
Nominal Module Operating Temperature NMOT	43.85 ± 3 °C
Temperature coefficient of P_{MAX}	-0.38 %/°C
Temperature coefficient of V_{OC}	-0.29 %/°C
Temperature coefficient of I_{SC}	0.04 %/°C

Certifications

IEC 61215-1:2016, IEC 61215-2:2016, IEC 61730-1:2016, IEC 61730-2:2016

Electrical data (STC)		WSP-320MX	WSP-325MX	WSP-330MX	WSP-335MX	WSP-340MX	
Nominal performance	P_{MAX}	320	325	330	335	340	Wp
Voltage at maximum performance	V_{MP}	32.76	32.78	32.80	32.82	32.85	V
Current at maximum performance	I_{MP}	9.77	9.93	10.07	10.21	10.35	A
Open circuit voltage	V_{OC}	39.26	39.59	39.93	40.27	40.61	V
Short circuit current	I_{SC}	10.48	10.56	10.62	10.68	10.74	A
Module efficiency		18.26	18.54	18.83	19.11	19.40	%
Power tolerance				-0/+5			W

The electrical data applies under standard test conditions (STC): solar radiation 1,000 W/m² with light spectrum AM 1.5, with cell temperature 25 °C. Measurement tolerance of P_{MAX} at STC: ±3%. Accuracy of other electrical data: ±10%.

Electrical data (NMOT)		WSP-320MX	WSP-325MX	WSP-330MX	WSP-335MX	WSP-340MX	
Nominal performance	P_{MAX}	233	237	240	244	248	Wp
Voltage at maximum performance	V_{MP}	30.10	30.12	30.14	30.16	30.18	V
Current at maximum performance	I_{MP}	7.74	7.87	7.98	8.09	8.20	A
Open circuit voltage	V_{OC}	36.98	37.30	37.62	37.94	38.26	V
Short circuit current	I_{SC}	8.29	8.35	8.40	8.45	8.49	A

The electrical data applies under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20 °C, wind speed 1 m/s.



This frame design, produced entirely from aluminium, guarantees maximum stability and protection against material fatigue. The rounded corners provide greater torsional stiffness and waterproofing in this critical area, where the material is at its weakest. In contrast to other corner connections that use mitered cuts or threaded connections, WINAICO's corner pieces guarantee the best possible transfer of tension across each section of the frame. The corner pieces are also designed with drainage channels, avoiding water and dust accumulation, which over time can cause cell shading, power degradation and hotspot problems.



Win Win Precision Technology Co., Ltd
 Tel + 886 3 568 8699 · info@w-win.com.tw
 www.wwppt.com.tw · www.winaico.com
 4F., No. 180, Sec. 2, Gongdao 5th Rd., East Dist.,
 Hsinchu City 300, Taiwan R.O.C.



WINAICO is a trademark of
 Win Win Precision Technology Co., Ltd.