

FixSun is a series of panels designed in Finland for challenging weather conditions. The new 5BB technology guarantees the most effective panels of the market, which are also able to make the most of the scattering on cloudy weather.


FXN500M-96 **Monocrystalline 96 cells 440w-500w**

1 *Reliable Quality*





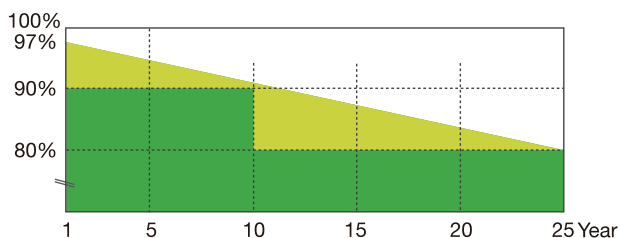

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant

2 *Superior Warranty*

- 25-year product warranty
- 25-year linear power output warranty



3 *Key features*

-  Monocrystalline modules designed for commercial and solar farm grid-tied applications
-  High power output and highest conversion efficiency
-  Anti-reflective and anti-soiling surface reduces power loss from dirt and dust
-  Outstanding performance in low-light irradiance environments
-  Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and snow loads (5400Pa)
-  High salt and ammonia resistance certified by TÜV NORD


Mechanical Parameters

Cell (mm)	Mono 156x156
Weight (kg)	26 (approx)
Glass Thickness	3.2mm
Dimensions (LxWxH) (mm)	1956x1310x45
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	96(8x12)
Junction Box	IP67
Connector	MC4 Compatible
Packaging Configuration	23 Per Pallet

Working Conditions

Maximum System Voltage	DC 1000V (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	15A
Maximum Static Load, Front (e.g., snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load, Back (e.g., wind)	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Application Class	Class A


Engineering Drawings

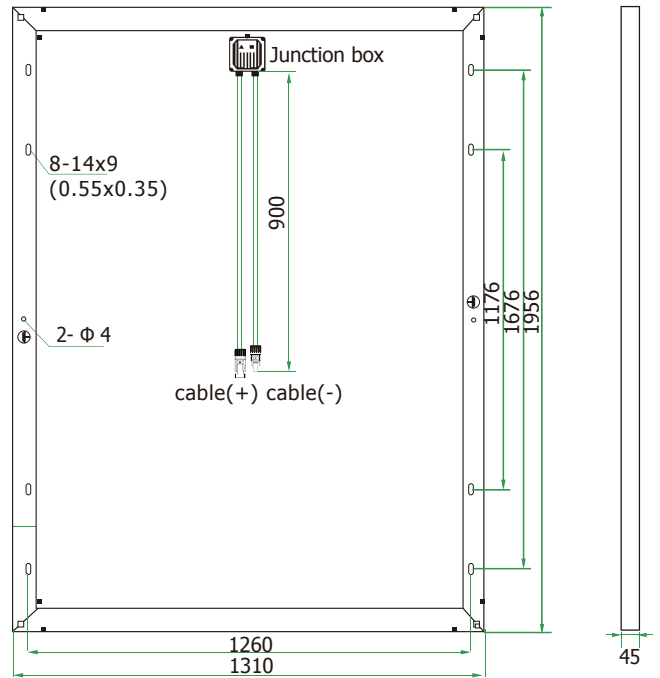

Electrical Parameters

Module	FXN440M-96	FXN450M-96	FXN460M-96	FXN470M-96	FXN480M-96	FXN490M-96	FXN500M-96
Peak Power Watts-P _{MAX} (Wp)*	440	450	460	470	480	490	500
Power Output Tolerance-P _{MAX} (W)				0 ~ +5			
Maximum Power Voltage-V _{MPP} (V)	47.78	47.87	48.01	48.25	48.35	48.45	48.63
Maximum Power Current-I _{MPP} (A)	9.21	9.40	9.59	9.74	9.93	10.12	10.28
Open Circuit Voltage-V _{OC} (V)	58.50	58.57	58.75	58.82	58.89	58.95	59.01
Short Circuit Current-I _{SC} (A)	9.40	9.73	9.78	9.90	10.04	10.67	10.87
Module Efficiency η _m (%)	17.17	17.56	17.95	18.34	18.73	19.12	19.51
Temperature Coefficient of I _{sc} (αI _{sc})				+0.058%/°C			
Temperature Coefficient of V _{oc} (βV _{oc})				-0.330%/°C			
Temperature Coefficient of P _{max} (γP _{mp})				-0.410%/°C			
STC	Irradiance 1000W/m ² , Cell Temperature 25°C, Air Mass 1.5						

I-V Curve

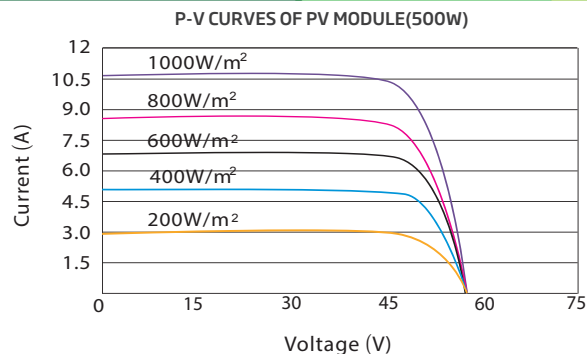

CONFORMS TO
UL STD.1703
CERTIFIED TO
ULC/ORD STD.
C1703