

Diamond Series 60 Mono PERC



TECHNICAL DATA

Electrical Data : All Data refers to STC (1000W/m², AM1.5G, 25°C)

Type	INA 310MP	INA 315MP	INA 320MP
Peak Power Pmax (Wp)	310.00	315.00	320.00
Maximum Voltage Vmpp(V)	33.10	33.30	33.50
Maximum Current Imp(A)	9.37	9.47	9.57
Open Circuit Voltage Voc (V)	40.70	40.90	41.10
Short Circuit Current Isc (A)	9.91	10.02	10.13
Module Efficiency (%)	19.13	19.44	19.75

STC : 1000W/m² irradiance, 25°C cell temperature, AM1.5G spectrum according to EN 60904-3.
2 Average relative efficiency reduction of < 5% at 200W/m according to EN 60904-1



Electrical Parameters at NOCT

Peak Power Pmax (Wp)	229	233.00	237.00
Maximum Power Voltage V@Pmax(V)	31.50	31.60	31.70
Maximum Power Current I@Pmax(A)	7.35	7.43	7.51
Open Circuit Voltage Voc (V)	39.30	39.50	39.70
Short Circuit Current Isc (A)	7.86	7.95	8.04


NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Temperature Coefficients (Tc) permissible operating conditions

Tc of Open Circuit Voltage (β)	-0.28%/°c ± 0.02
Tc of Short Circuit Current (α)	0.048%/°c ± 0.01
Tc of Power (γ)	-0.39%/°c ± 0.02
NOCT	45±2°C
Maximum Series Fuse Ratings	20 A
Temperature Range	-40°C to +85 °C
Maximum System Voltage	1000 V DC

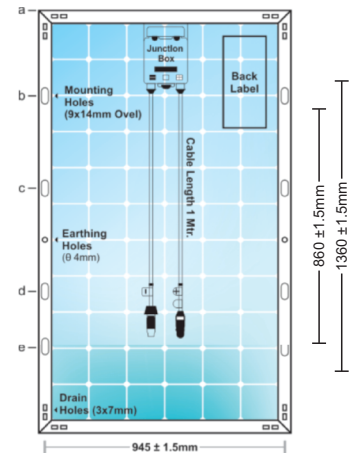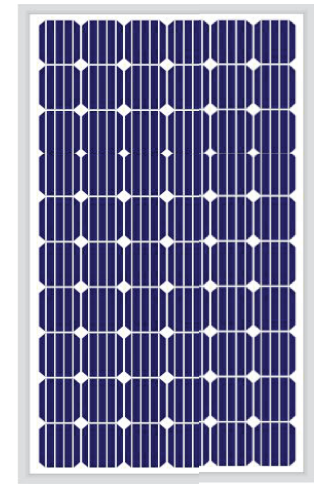


Distance	In mm (± 1.5)
a-b	142.50
b-c	250
c-d	860
d-e	250




MECHANICAL DATA	
Length x Width x Height(in mm)	1645mm x 985mm x 35mm (± 1.5 mm)
Weight	18.50 Kg
Junction Box	IP 67 / IP 68 rated with 3 Bypass diodes
Cable & Connectors	4 sqm (12AWG) solar cable 1000mm x 2 nos black MC4 / MC4 compatible connectors
Application Class	Class A (Safety class II)
Substrate (Glass)	High transmission low iron tempered glass AR coated
Solar cells & Orientation	60 No's (10x6) Mono PERC solar cells
Cells Encapsulant	EVA (Ethylene Vinyl Acetate) - FC/UFC
Back Sheet	Composite film - White : (Black & Transparent optional)
Frame	Silver Anodized aluminum frame with twin wall profile (Black Optional)
Mechanical Load Test	Sustain Heavy wind & snow loads (2400 Pa & 5400 Pa or 550 Kg/m ² Maximum diameter of 24 mm with Hail impact of 83 Km/h

IV CURVE

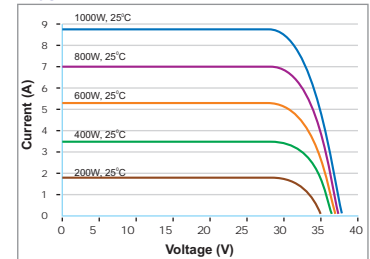

Performance Warranty

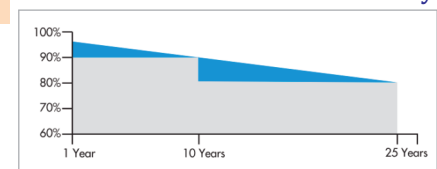

WARRANTY AND CERTIFICATIONS

Performance Warranty**	Linear Power Warranty for 25 years, 90% for 10 years and 80% for 25 years
Approvals and certificates	Products : IEC 61215:2005 - Ed 2, IEC 61730- Ed. 1 & Ed.2, IEC 61701, IEC 62804, MNRE, UL, CE, IS : 14286

CAUTION: READ SAFETY AND DETAIL INSTALLATION MANUAL BEFORE USING THE PRODUCT (Refer Our Website).

