



ORDERS SOLAR




+86 15710018905



info@orderspv.com

BSM455M-72HPH

435-455W

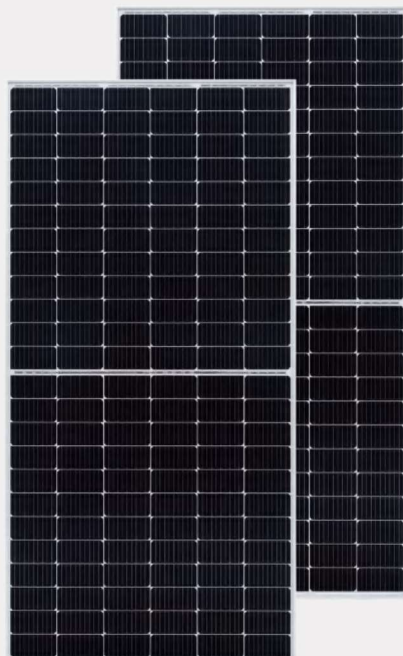

YOUR BEST PV SUPPLIER

455W

Maximum Power Output

20.8%

Maximum Module Efficiency

0~+5W

Power Output Guarantee



Ideal choice for large scale ground installation



More evenly distributed soldering points and better reliability and lower hot spot risk



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Lower LID due to lower oxygen and carbon content



Special cell process ensures great performance under low irradiance conditions




Provides higher module efficiency under low irradiance conditions, and achieves greater installation capacity in a limited space.

Key features

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2x 100% EL inspection ensuring defect-free modules

Linear Performance Warranty

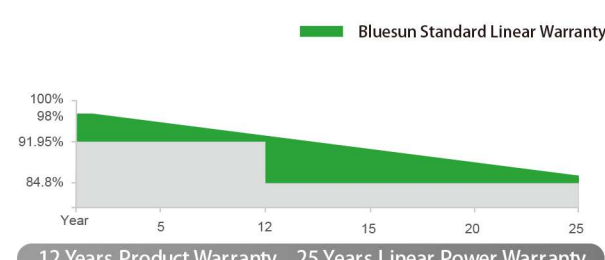

Certificate



ORDERS SOLAR



+86 15710018905



info@orderspv.com



+86 15710018905




info@orderspv.com

ELECTRICAL PARAMETERS AT STC

Model	BSM435M-72HPH	BSM440M-72HPH	BSM445M-72HPH	BSM450M-72HPH	BSM455M-72HPH
Max Power(Pmax) [W]	435	440	445	450	455
Open Circuit Voltage(Voc) [V]	49.0	49.2	49.4	49.6	49.8
Short Circuit Current(Isc) [A]	11.33	11.40	11.47	11.54	11.61
Max Power Voltage(Vmp) [V]	40.3	40.5	40.7	40.9	41.1
Max Power Current(Imp) [A]	10.80	10.87	10.94	11.01	11.08
Module Efficiency [%]	19.8	20.1	20.3	20.5	20.8
Power Tolerance	0-5W				
Max System Voltage	DC 1500/1000(IEC)				
Max Series Fuse Rating	20A				
Operating Temperature	-40°C to +85°C				
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5				


*For mechanical loading performance: front side maximum static loading 5400Pa, rear side maximum static loading 2400Pa; hailstone test: 25mm hailstone at the speed of 23m/s

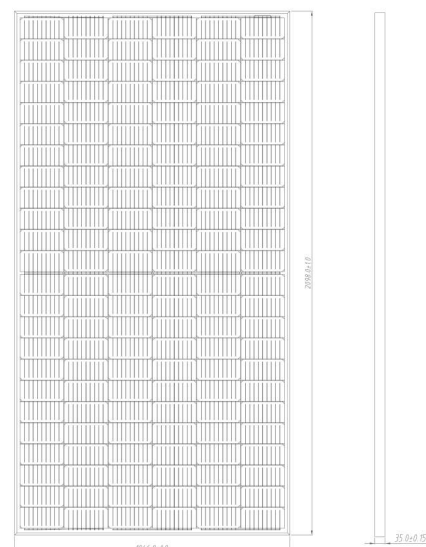

NMOT


Model Number	BSM435M-72HPH	BSM440M-72HPH	BSM445M-72HPH	BSM450M-72HPH	BSM455M-72HPH
Max Power(Pmax) [W]	324	328	332	335	339
Open Circuit Voltage (Voc)	45.6	45.8	46.0	46.2	46.4
Short Circuit Current (Isc)	9.15	9.20	9.26	9.32	9.37
Maximum Power Voltage (Vmp)	37.6	37.8	38.0	38.2	38.4
Maximum Circuit Current (Imp)	8.62	8.67	8.73	8.78	8.84
NMOT	43±2°C				

*Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1m/s

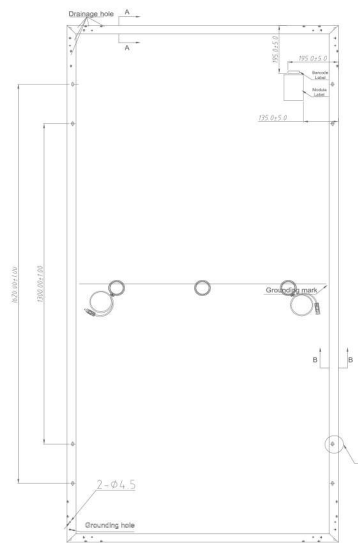



Mechanical Characteristics

Solar Cells	Mono Perc 166×166mm(6inches)
Dimensions	2094*1046*35mm (82.60*41.18*1.38inches)
Weight	25.5kg (56.2lbs)
Front Load	5400Pa
Connector Type	PV Connector
Junction Box	IP68, 3/6 bypass diode
Cables	4mm ² (IEC)
Glass	3.2mm High Transmission Tempered Glass
Frame	Anodized Aluminium Alloy Frame
Packing	31pcs per pallet, 155pcs per 20'GP Container, 704pcs per 40'HQ Container

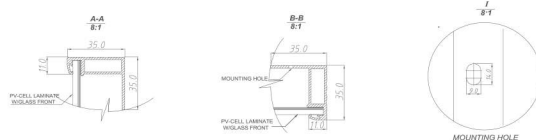

I-V Curves

Current-Voltage Curve (BSM455M-72HPH)

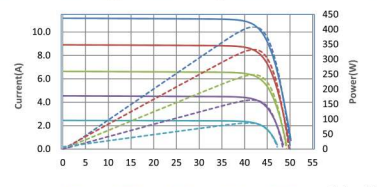

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.36%/°C
Temperature Coefficient of Voc	β (Voc)	-0.26%/°C
Temperature Coefficient of Isc	α (Isc)	0.043%/°C



+86 15710018905



info@orderspv.com