


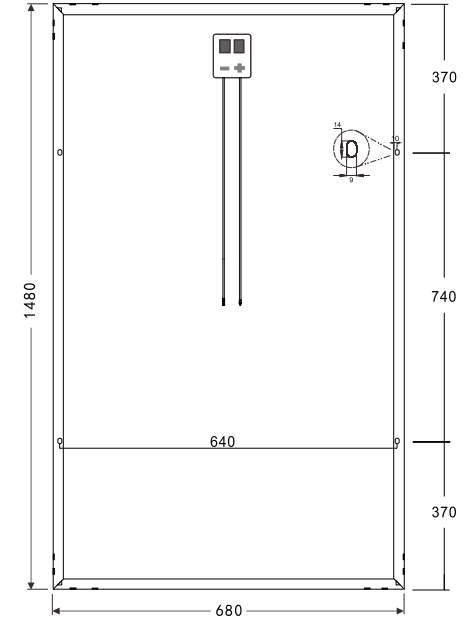


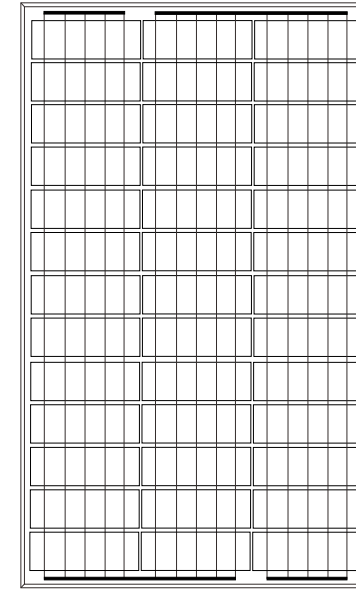

QN-210M20022

Comprehensive Certificates

- IEC61215/IEC61701/IEC61730
- ISO 9001:2015 Quality Management System
- ISO 45001:2018 Occupational health and safety management system
- ISO 14001:2015 Environmental Management System



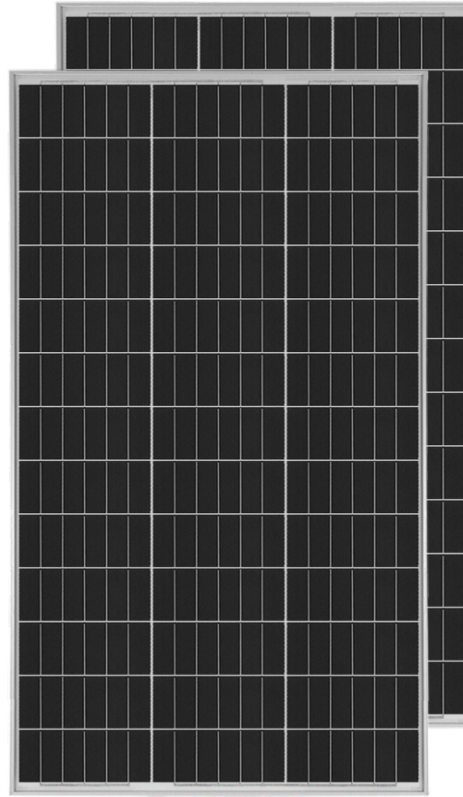


Units:mm/£2

Electrical Parameters at (STC)

Power (W)	Module Efficiency(%)	Voltage at Pmax(Vmp)	Current at Pmax(Imp)	Open Circuit Voltage(Voc)	Short Circuit Current(Isc)	Power Tolerance(w)
200W	19.87%	21.84	9.15	26.67	9.70	±3%

Characteristics



PS:Frame color and cable length can be customized

Mechanical Parameters	
Solar Cell(Type/Size)	MONO(210mm)
Solar Cells Number	39Pcs(3x13)
Dimension	1480x680x35mm
Tempered Glass	3.2 mm High Permeability Coated
Frame	Anodized aluminum alloy
Junction Box	IP67*2*15A diode
Cable	2.5mm ² (+)-700mm/(-)700mm
Connector	Original MC4/Compatible MC4

Packing	
Module Type	QN-210M20022
Carton Size	1490x690x85mm
Number	2Pcs/Ctn
G. W	23Kg/Pcs
N. W	21.2Kg/Pcs
20GP Container	647Pcs
40HQ Container	1619Pcs

STC: ☀️ Light intensity 1000W/m₂ 🔋 Battery temperature:25°C ☁️ atmosphere quality=15

NOCT: ☀️ Light intensity 800W/m₂ 🔋 Battery temperature:20°C ☁️ atmosphere quality=15 🌪️ wind velocity 1m/s