



Residential / Commercial / Utility



# 395 / 400 / 405 / 410

## DM410M10-54HSW/-V



### Adaptability

Best size and excellent performance for various application scenarios



### Quality

Over 40 years of manufacturing experience in house wafer, cell and module




### Guarantee

Warranty comes from one of the most financial healthy PV providers




### Service

Customer-oriented and local services

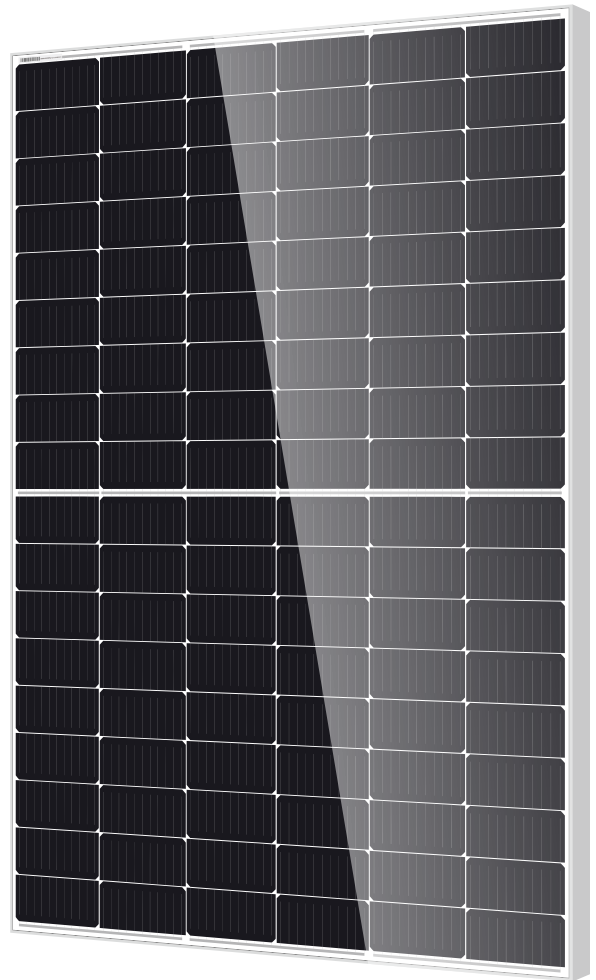

### Warranty

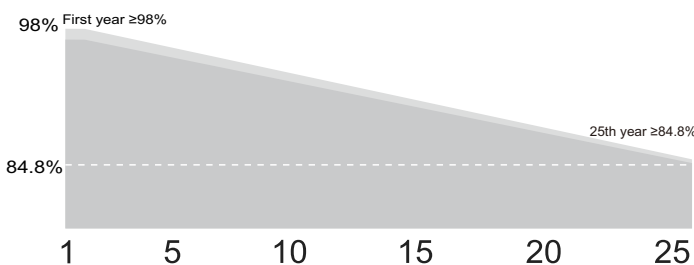

**12** Years product warranty

**25** Years power output warranty

A Member of the Hengdian Group

Ver:20220614A0

## Electrical Specifications

Module Type	DM395M10-54HSW/-V		DM400M10-54HSW/-V		DM405M10-54HSW/-V		DM410M10-54HSW/-V	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Pm(W)	395	317	400	321	405	325	410	329
Imp(A)	13.10	10.54	13.19	10.61	13.28	10.68	13.37	10.75
Vmp(V)	30.18	30.11	30.35	30.28	30.52	30.45	30.69	30.62
Isc(A)	13.50	10.75	13.59	10.82	13.68	10.89	13.77	10.96
Voc(V)	37.09	36.77	37.21	36.88	37.33	37.00	37.45	37.12
Module Efficiency	20.39%		20.65%		20.91%		21.17%	

Pm Tolerance 0/+3% STC:AM1.5 1000W/m<sup>2</sup> 25°C NOCT:AM1.5 800W/m<sup>2</sup> 20°C 1m/s Measurement uncertainty:±3%

## Mechanical Data

Cell Type	P type Mono-crystalline
Cell Arrangement	108(6x18)
Module Dimensions	1708x1134x30mm
Weight	20kg
Module Structure	Glass/Encapsulant/Backsheet
Glass Thickness	2.8mm
PV module classification	Class II
Junction Box Rating	IP67/IP68
Cables	4mm <sup>2</sup> /1100mm or Customized Length
Connector Type	MC4/MC4 Compatible(1000V) EVO2/EVO2 Compatible(1500V)

## Packaging


Pallet dimensions	1750×1140×1250mm
Container	40'HQ
Pieces per Pallet	36
Pieces per Container	936

## Temperature Characteristics

Nominal Operating Cell Temperature(NOCT)	42±3°C
Temperature Coefficient of Isc	+0.0448%/°C
Temperature Coefficient of Voc	-0.246%/°C
Temperature Coefficient of Pmax	-0.330%/°C


## Maximum Ratings

Operating Temperature	-40°C to+85°C	Maximum Series Fuse Rating	25A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa	Number of Diodes	3
Maximum System Voltage	1000V/1500V DC(IEC)	Fire Rating Class	Class C

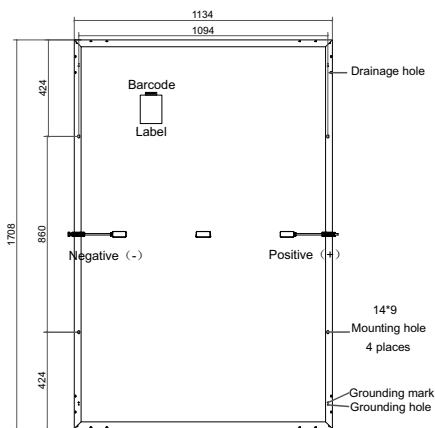


(Back side)  
Note:mm

Temperature Dependence of Isc, Voc, Pmax(°C)

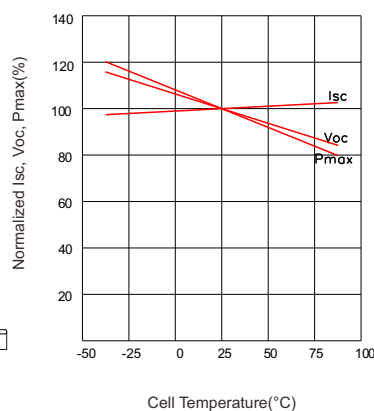

Current-Voltage&Power-Voltage Curve(410W)

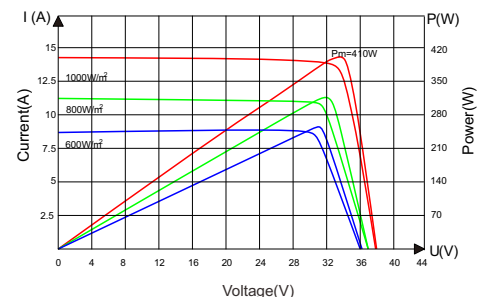

**Statement:** Due to technological progress, product parameters will be adjusted accordingly; When signing the contract, the latest data of the company shall prevail.