



XS60 SERIES PHOTOVOLTAIC MODULES

PEAK POWER: 315-320 Wp

FEATURES INCLUDE:

- 60 MOTTECH monocrystalline solar cells connected in series
- Positive power tolerance of 0~3% improves system performance
- Industry-leading module efficiency: maximum efficiency of 19.55%
- Tested up to 5400Pa for maximum load resistance
- Verified resistance against PID effects
- Progressive Power Warranty guarantees 80.2% of rated power at 25 years
- Manufactured globally with world-class quality standards

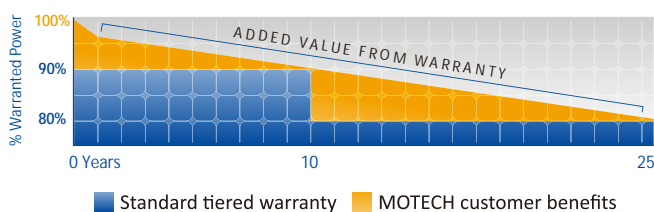


QUALITY, RELIABILITY, AND KWH YIELD

MOTTECH modules are powered by industry acknowledged high performance, reliable MOTTECH silicon cells. 20 years of experience in solar module engineering and design, along with rigorous durability and performance tests, ensure reliable lifetime performance and maximum kWh yield.

25-YEAR PROGRESSIVE WARRANTY*

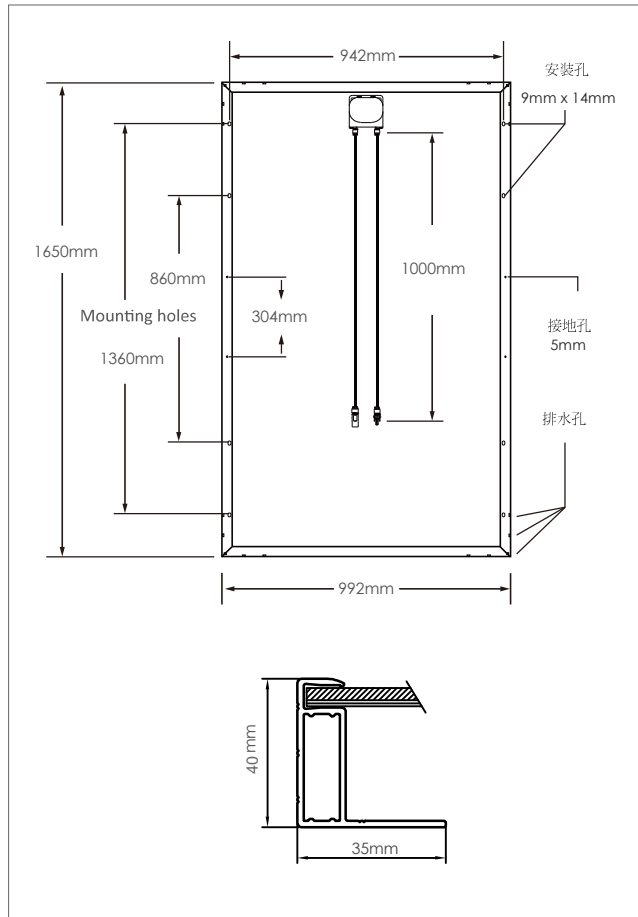
- 25-year progressive power warranty
- 10-year warranty on materials and workmanship



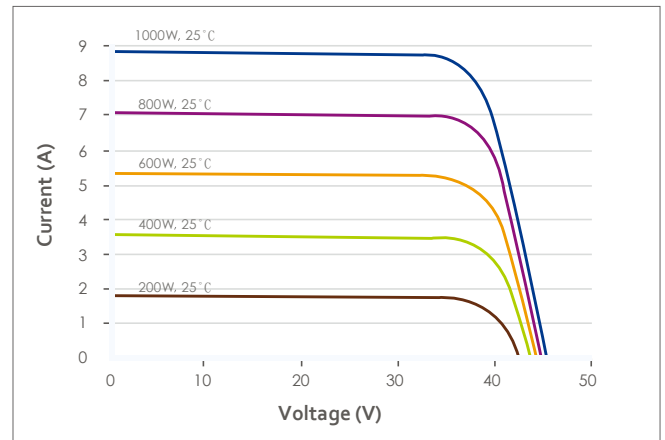
CERTIFICATIONS & STANDARDS*



Application Class A
Safety Class II

PHYSICAL CHARACTERISTICS

PHYSICAL DESIGN PROPERTIES

| | |
|---------------|--|
| Dimension | 1650×992×40 mm |
| Weight | 19.3 kg±5% |
| Glass | 3.2mm low iron tempered glass with anti-reflective coating |
| Junction Box | IP67/IP68 with 3 bypass diodes |
| Output Cables | Φ4.0mm ² , 1000mm |
| Connectors | MC4 Compatible |
| Packing | 26pcs/ pallet, 728pcs/ container (HQ) |

IV CURVE

ELECTRICAL PERFORMANCE

XS60CB-315-T

XS60CB-320-T

| Electrical Performance @ STC | | | |
|------------------------------|--|--------|--------|
| Maximum Power Pmax[Wp] | | 315 | 320 |
| Max. Power Voltage Vmpp(V) | | 33.55 | 33.85 |
| Max. Power Current Impp(A) | | 9.39 | 9.46 |
| Open Circuit Voltage Voc(V) | | 39.33 | 39.47 |
| Short Circuit Current Isc(A) | | 9.56 | 9.59 |
| Module Efficiency (%) | | 19.24% | 19.55% |

ELECTRICAL PERFORMANCE PARAMETERS

| | | | | |
|--|-----------------|-------|-------------------------------------|------------|
| Isc Temperature Coefficient | α (%/°C) | +0.06 | Max. Series Fuse | 15A |
| Voc Temperature Coefficient | β (%/°C) | -0.32 | Max. System Voltage | IEC 1000V |
| Pmax Temperature Coefficient | γ (%/°C) | -0.42 | Nominal Operating Cell Temp. (NOCT) | 45°C ± 2°C |
| Efficiency Reduction at 200W/m ² , 25°C | | <5% | | |

IV parameters are rated at Standard Test Conditions (Irradiance of 1000 W/m², AM 1.5, cell temperature 25°C). All measurements are guaranteed at the laminate leads. NOCT is measured at 800 W/m², 20°C ambient, and 1 m/s windspeed. Specifications are subject to change without notice. Motech reserves the rights of final interpretation and revision on this datasheet.

DOC18TW052 Rev A Oct 2018