


YLM 144 CELL

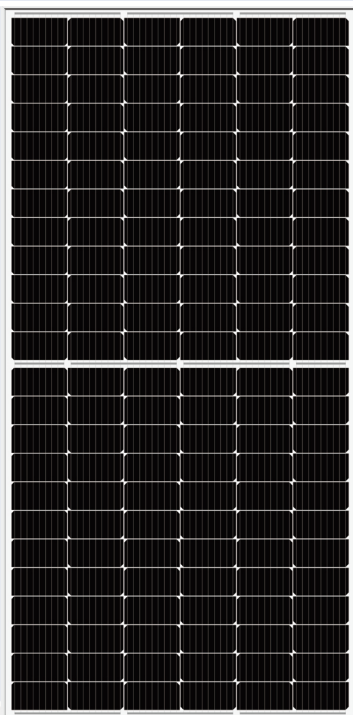

22.3%

CELL EFFICIENCY


12 YEAR

PRODUCT WARRANTY

0-5W

POWER TOLERANCE

25 Years Linear Warranty

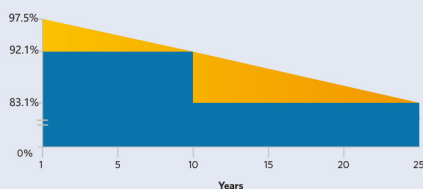

■ YINGLI's Linear Performance Warranty

■ Industry Standard Warranty

YINGLIYT.NET

IMPROVED POWER NEVER SETTLE FOR LESS

YLM series product, using multi-busbar design, reduced the cells silver paste consumption, improved cells efficiency, achieved the higher modules power output.



Higher Durability

The multi-busbar design can decrease the risk of the cell micro-cracks and fingers broken.



High Power Density

High conversion efficiency and more power output per square meter, by lower series resistance and improved light harvesting.



Half-cell Design

Less energy loss caused by shading due to new cell string layout and split J-box, and lower cell connection power loss due to half-cell design.



Advanced Glass

Our high-transmission glass features a unique anti-reflective coating that directs more light on the solar cells, resulting in a higher energy yield.

Yingli Energy (YanTai) Co., Ltd is a subsidiary of Ying li Group. The company specializes in manufacturing high efficiency solar panel. Under the unified management of the Group, relying on the Group's strong technical strength, advanced management mode, high-quality raw material supply chain, the company has introduced the international leading intelligent production equipment, adopting mature technical process, strict inspection standards, and full production line intelligent MES management and control system to produce 12BB single-glass and double-glass high-efficiency photovoltaic modules of international advanced technology level.

YLM 144 CELL

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

Module type	YLxxxD-40d 1/2 (xxx=Pmax) YLxxxD-40d 1500V 1/2 (xxx=Pmax)					
Power output	P_{max}	W	435	440	445	450
Power output tolerances	ΔP_{max}	W	0/+5			
Module efficiency	η_m	%	20.01	20.24	20.47	20.70
Voltage at P_{max}	V_{mpp}	V	40.75	40.95	41.15	41.35
Current at P_{max}	I_{mpp}	A	10.68	10.75	10.82	10.89
Open-circuit voltage	V_{oc}	V	49.30	49.50	49.70	49.90
Short-circuit current	I_{sc}	A	11.26	11.33	11.40	11.47

STC: 1000W/m² irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.3% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

Power output	P_{max}	W	322.2	326.0	329.7	333.4
Voltage at P_{max}	V_{mpp}	V	37.7	37.9	38.1	38.3
Current at P_{max}	I_{mpp}	A	8.54	8.60	8.66	8.71
Open-circuit voltage	V_{oc}	V	46.0	46.2	46.3	46.5
Short-circuit current	I_{sc}	A	9.12	9.17	9.23	9.29

NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45±2
Temperature coefficient of P_{max}	γ	%/°C	-0.37
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.29
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.06

OPERATING CONDITIONS

Max. system voltage	1000V _{DC} or 1500V _{DC}
Max. series fuse rating	20A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

*DO NOT CONNECT FUSE IN COMBINER BOX WITH TWO OR MORE STRINGS IN PARALLEL CONNECTION

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Cell (quantity / material)	144 / monocrystalline silicon
Frame (material)	anodized aluminum alloy
Junction box (protection degree)	≥ IP67
Cable (length / cross-sectional area)	400(300)mm / 4mm ²

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE, MCS, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007, SA 8000




GENERAL CHARACTERISTICS

Dimensions (L / W / H)	2094mm / 1038mm / 35mm
Weight	23.5kg

PACKAGING SPECIFICATIONS

Number of modules per pallet	30
Number of pallets per 40' container	22
Packaging box dimensions (L / W / H)	2135mm / 1110mm / 1190mm
Box weight	745 kg

Unit: mm

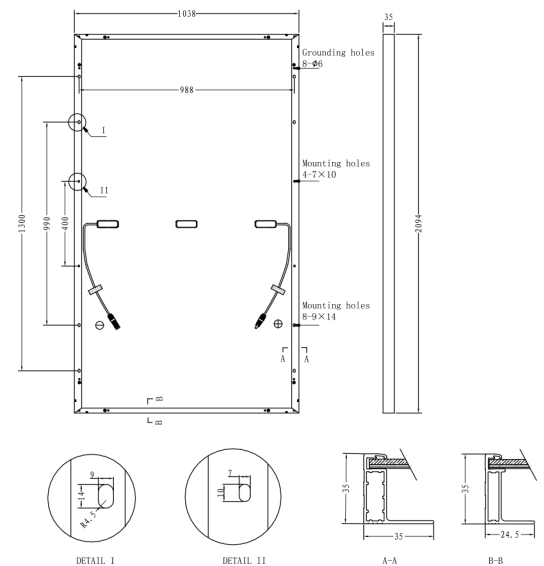

Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Yingli Partners:

Yingli Energy (Yantai) Co., Ltd.

Tel: +86-535-6430103 6501189

Email: info@yingliyt.com

Address: No. 107 Jinshan Road,

Fushan District, Yantai City, Shandong, China

