



320-340 Watt LS-PD72


Full-Cell MBB POLY Dual-Glass



9BB



12BB

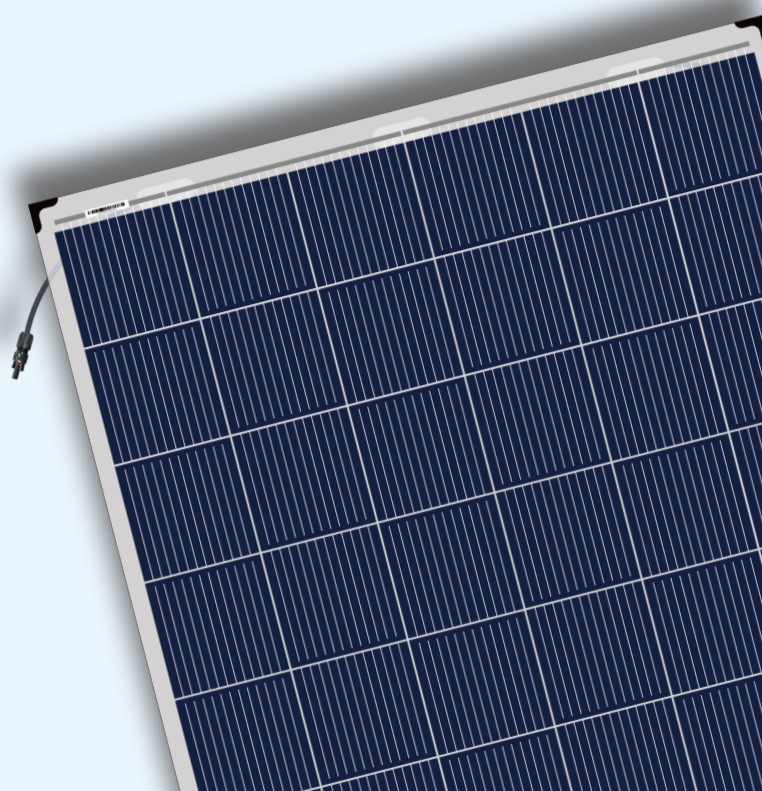

KEY FEATURES



Multi Busbar Solar Cell

Stronger current collection ability, Special circuit design with much lower hot spot temperature;



Module efficiency up to 16.95%

Higher power brings lower kilowatt-hour cost, higher lifetime generating capacity, simultaneously lower annual power attenuation;



PID Resistant

Excellent PID resistance at 96 hours (85°C/85%) test, and also can be improved to meet higher standards for the particularly harsh environment;



Low-Light Performance

Excellent power generation performance under Low-Light condition due to multi busbar;



Anti-Crack

Excellent anti-microcracking performance with more balanced interior stress;




Strength and Durability

Certified for 5400Pa snow and 2400Pa loads test;

Linear Performance Warranty

15 Years Product Warranty · 30 Years Linear Power Warranty

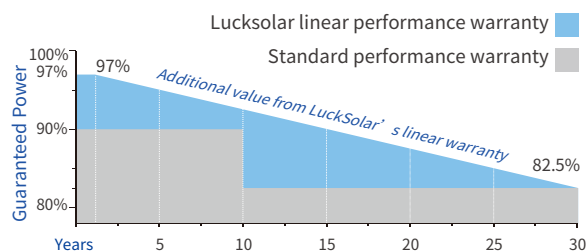

Product And Quality Certifications

ISO 9001:2008

ISO 14001:2004

OHSAS 18001:2007



HQ: No.99, Longxi Avenue, Zhulin Town, Jintan District, Changzhou. Division: No.16, Zhouzhuang Technology Park, Jiepai Town, Binhai County, Yancheng.

Luck Solar is the world's leading green energy provider, committed to making clean energy illuminate every corner of the world. We strive to provide high-efficiency, high-quality and low-cost clean energy solutions. Luck Solar insists on continuous innovation around customer needs. We invest heavily in technology research, and promotes green energy in the world.

+86 519 68905758

service@lucksolar.com

www.lucksolar.com

ELECTRICAL SPECIFICATIONS

Module Type	LS-PD72-320		LS-PD72-325		LS-PD72-330		LS-PD72-335		LS-PD72-340	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated output (Pmp/Wp)	320	237	325	241	330	245	335	249	340	253
Rated voltage (Vmp/V)	37.4	34.7	37.6	35.0	37.8	35.3	38.0	35.6	38.2	35.9
Rated current (Imp/A)	8.56	6.83	8.66	6.89	8.74	6.94	8.82	6.99	8.91	7.05
Open circuit voltage (Voc/V)	46.4	43.0	46.7	43.3	46.9	43.6	47.2	43.8	47.5	44.0
Short circuit current (Isc/A)	9.05	7.35	9.10	7.40	9.14	7.45	9.18	7.52	9.22	7.98
Module efficiency (%)	15.95%		16.20%		16.45%		16.70%		16.95%	
Power Tolerance (W)	0~+5		0~+5		0~+5		0~+5		0~+5	

Standard Test Condition(STC): Irradiance 1000W/m², Cell Temperature 25°C, AM1.5

Nominal Operating Cell Temperature(NOCT): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS

NOCT Temperature	44°C ±2°C
Temperature Coefficient (Pmax)	-0.39%/°C
Temperature Coefficient (Voc)	-0.30%/°C
Temperature Coefficient (Isc)	0.05%/°C

MAXIMUM RATINGS

Maximum system voltage (IEC)	1500V DC
Snow/Wind	5400Pa/2400Pa
Operating Temperature	-40°C ~ +85°C
Maximum series fuse rating	20A

MECHANICAL SPECIFICATIONS


Cell Type	12BB/9BB POLY 156.75×156.75mm
No. of Cells	72(6×12)
Dimensions	2002×1002×6mm
Weight	28kg
Front Glass	2.5mm, Anti-Reflection Coating
Back Glass	2.5mm, heat strengthened glass
Junction Box	IP67/IP68, 3 diodes
Output Cables	4mm ² , Length 300mm
Connector type	MC4 compatible

PACKING CONFIGURATIONS

Per Pallet	30 Pcs
Per 20' GP Container	300 Pcs
Per 40' HQ Container	660 Pcs


ENGINEERING DRAWINGS

Engineering Drawings

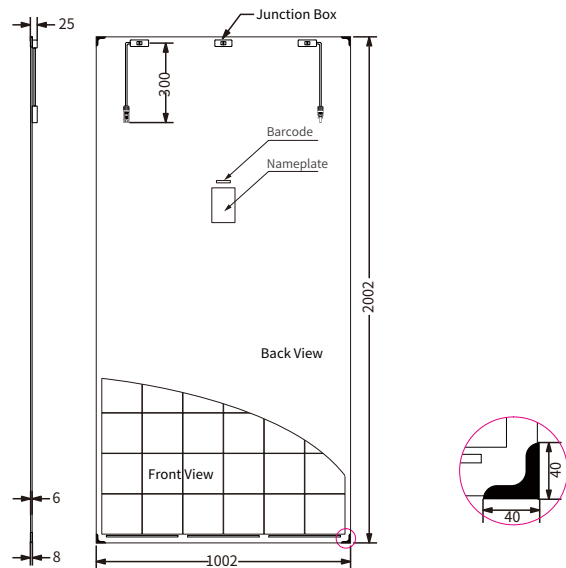

CURVE & TEMPERATURE DEPENDENCE

I-V CURVE (330W)

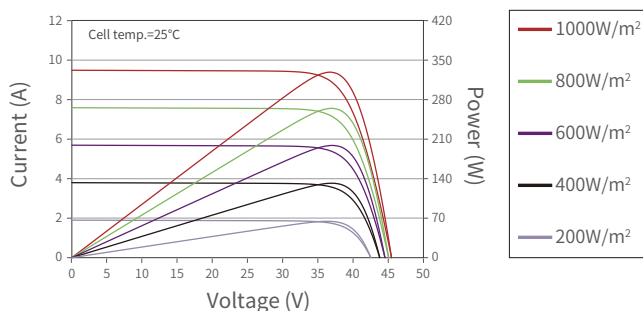

Current-Voltage curves (330W)

