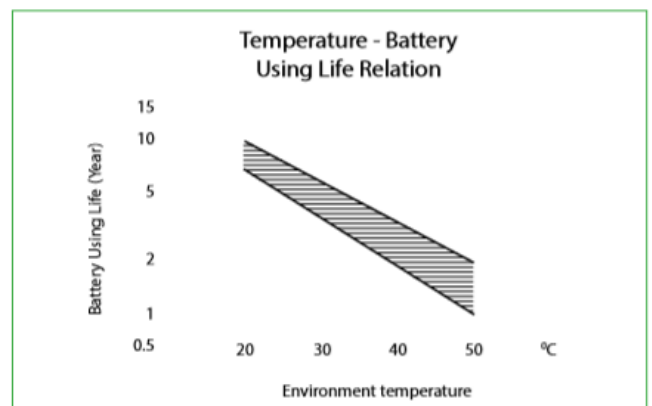
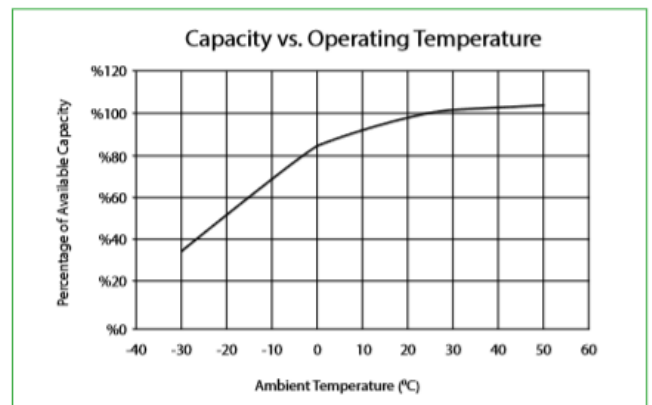
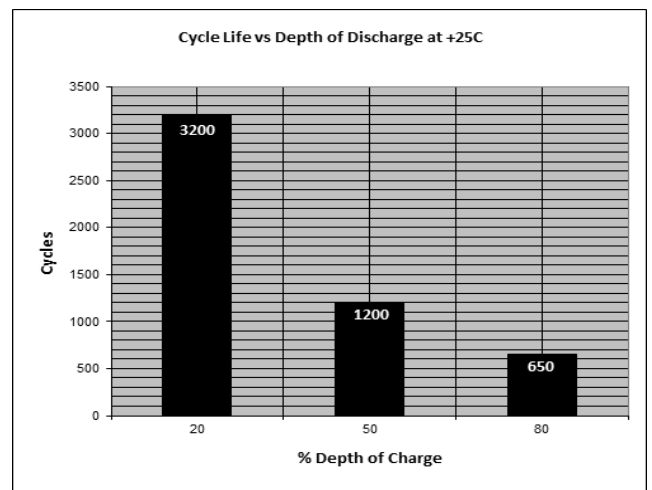





| Code | YGE12-95 |
|---|---|
| Design Number | 25952015E |
| Nominal Capacity (Ah) | 95 |
| Box Type / Number of Cells | L6 / 6 |
| Voltage (V) | 12 |
| Electrolite Type | Gel |
| Weight (kg) (+ - %5) | 29,9 |
| Dimensions (mm) L / W / H (H1-H2) | 393/174/167-190 [+5/-1mm] |
| Terminal Type | Round Type (DIN 72311-4) + M8 Optional |
| Float Voltage | 13,6 - 13,8 VDC @25°C |
| Cycle Voltage | 14,25 - 14,6 VDC @25°C |
| Recommended Charging Current Limit (Ah) | 9,5 |
| Discharge Cut-Off Voltage %100 Depth of Discharge D.O.D. | 1,75 VDC @ (A) <=0,2 C |
| Capacity C20 (Ah) | 95,0 |
| Capacity C10 (Ah) | 87,1 |
| Capacity C5 (Ah) | 78,4 |
| Capacity C3 (Ah) | 74,2 |
| Self Discharge | Less than %2 per month @25°C |
| Storage Time | 6 months @25°C. Charge Recommended Before Using |
| Cycle Life DOD %80 | 650 |
| Cycle Life DOD %50 | 1200 |
| Cycle Life DOD %20 | 3200 |
| Internal Resistance [miliohm] | 7,65 @25°C |
| Short Curcuit Current (Ampere) | 2075 |

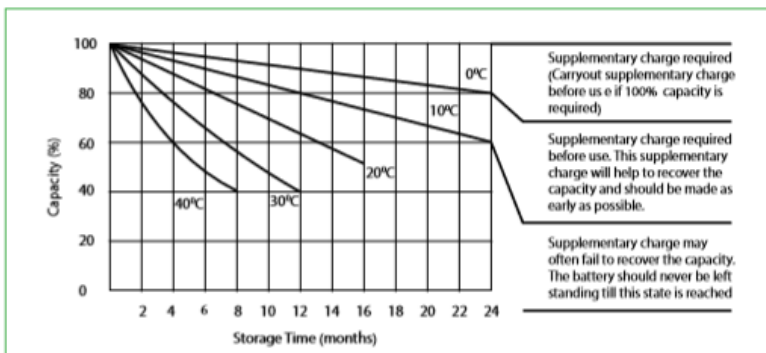


 **Terminal Type A**
DIN 72311-4 Round Type

Layout (0)



 **Terminal Type S**
(M-8 Optional)





Yiğit Akü A.Ş.

Organize Sanayi Bölgesi Oğuz Caddesi No: 2 Sincan / Ankara - TURKEY

Tel : +90 312 267 02 80 - Fax: +90 312 267 08 61 - 267 40 00

endustriyel@yigitaku.com

www.yigitaku.com