


Module HC 60M

360-370 Watt

Positive power tolerance of 0~+3%

HALF CELL - MONO PERC 60 CELL

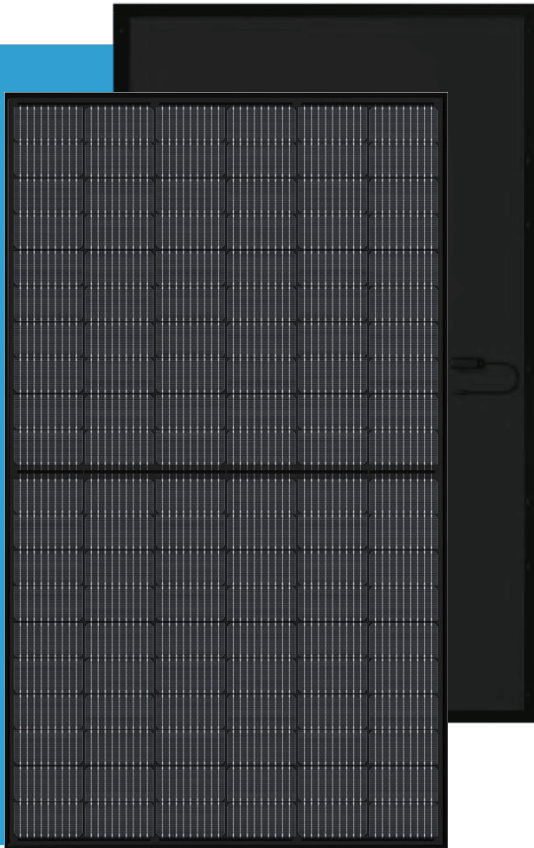

KEY FEATURES



9 Busbar Solar Cell

9 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Efficiency

Higher module conversion efficiency (up to 20.38%) benefit from half cell structure (low resistance characteristic).



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty 25 Year Linear Power Warranty

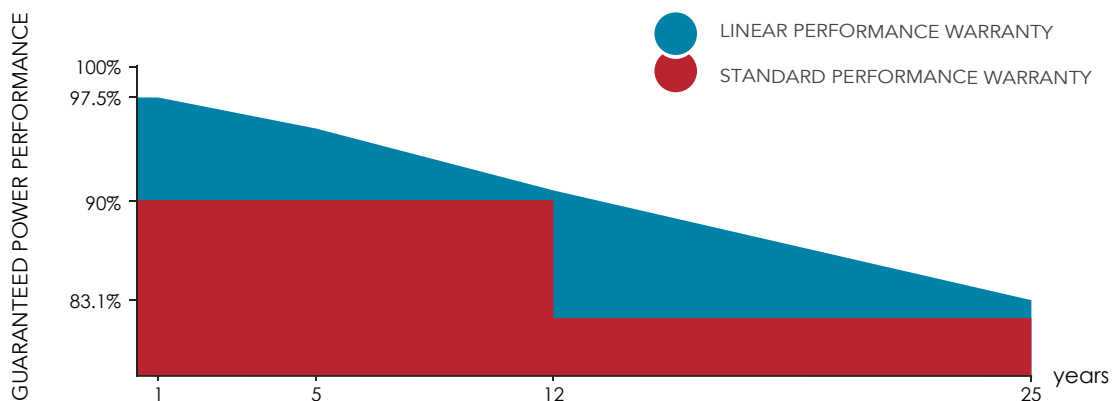

ISO9001:2015 certified factory
UL61703 certified product

ENGINEERING DRAWINGS

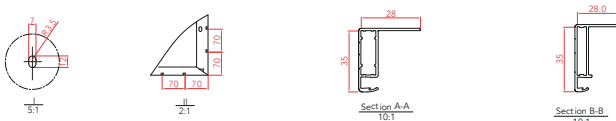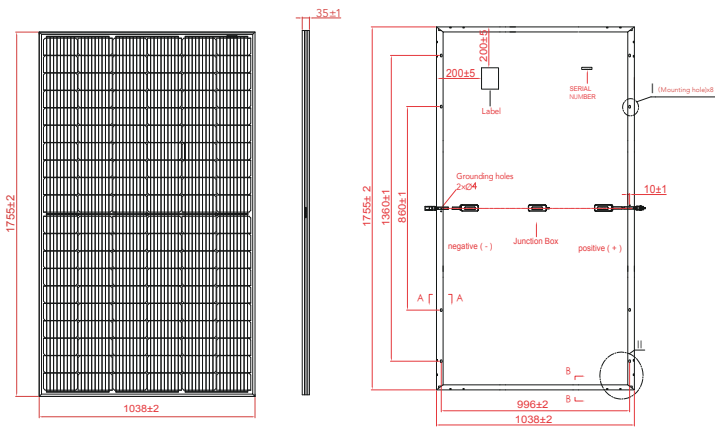


PACKAGING CONFIGURATION

(Two pallets = One stack)


31pcs/pallet, 62pcs/stack, 930pcs/53FT Truck

ENGINEERING DRAWINGS

Current-Voltage & Power-Voltage Curves (370W)

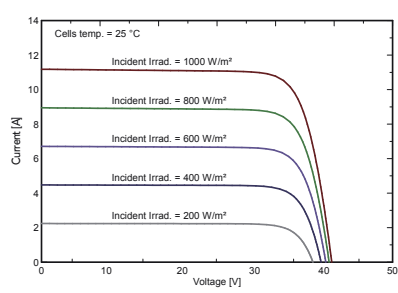

Temperature Dependence of Isc, Voc, Pmax

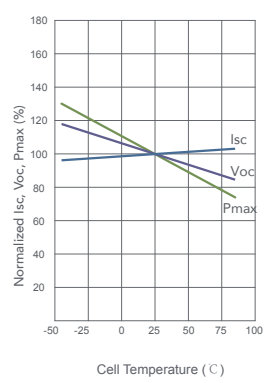

MECHANICAL CHARACTERISTICS

Cell Type	Mono PERC 166×83mm
No. of Half-cells	120 (6×20)
Dimensions	1755x1038x35mm (69.09x40.87x1.37 inch)
Weight	19.5 kg (43.0 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1x4.0mm ² , (+) 350mm, (-) 350mm or Customized Length

SPECIFICATIONS

Module Type	SE-166*83-360M-120N	SE-166*83-365M-120N	SE-166*83-370M-120N
	STC	STC	STC
Maximum Power (Pmax)	360W	365W	370W
Maximum Power Voltage (Vmp)	34.2	34.4	34.6
Maximum Power Current (Imp)	10.53	10.62	10.70
Open-circuit Voltage (Voc)	41.2	41.4	41.6
Short-circuit Current (Isc)	11.16	11.26	11.34
Module Efficiency STC (%)	19.76%	20.04%	20.31%
Operating Temperature (°C)		-40°C ~ +85°C	
Maximum System Voltage		1500VDC (IEC)	
Maximum Series Fuse Rating		20A	
Power Tolerance		0~+3%	
Temperature Coefficients of Pmax		-0.35%/°C	
Temperature Coefficients of Voc		-0.29%/°C	
Temperature Coefficients of Isc		0.048%/°C	
Nominal Operating Cell Temperature (NOCT)		45±2°C	

STC: Irradiance 1000W/m Cell Temperature 25°C AM=1.5
NOCT: Irradiance 800W/m Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%

Contact us!

Become the best solar company for the world +1(956) 308 3075 contact@solareverusa.com