



445W-455W

XP-450W-72MET Bifacial

High Efficiency Half- Cell Mono PERC Module
The solar cells made of silicon


Comprehensive Products and System Certificates

- OHSAS 1 8001: Occupational Health and Safety Management System
- ISO 1 4001: Environmental Management System
- ISO 9001: Quality Management System



Linear Performance Warranty

- 15 YEARS** Product quality & process guarantee
- 25 YEARS** Linear power guarantee

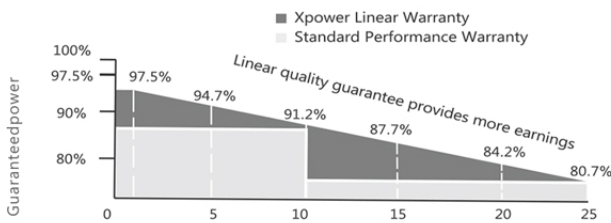

Product Insurance



Half-cut cell technology
New circuit design
lower internal current, lower Rs loss



3 times EL test to ensure best quality



Resistant to salt-spray corrosion
(IEC61701, certified to TUV Rheinland test standard)



Special circuit design
With much lower hot spot temperature



Resistant to power
Attenuation passed TUV Rheinland system voltage endurance test




Special cell process ensures great performance under low irradiance conditions

XP-(445W-455W)-72MET Bifacial


Monocrystalline Module

DESIGN

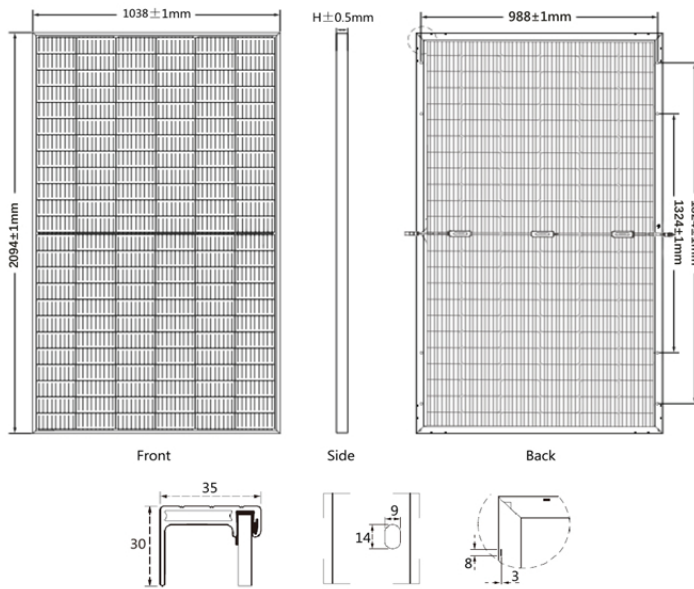

Current-Voltage & Power-Voltage

Curves(450W)

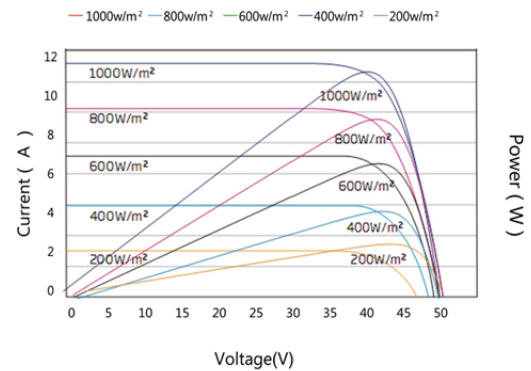

STRUCTURAL CHARACTERISTICS

Module dimensions (L*W*H)	2094 x 1038 x 35 mm
Weight	24.0 kg
Number of cells	144 cells
Cell	PERC Monocrystalline 166 x 83mm
Glass	Tempered 3.2mm AR, High transmittance, Low iron
Frame	Anodized aluminium alloy
Junction box	IP68, 3 diodes
Output wire	4.0mm², wire length: 300mm
Connector	MC4 Compatible
Mechanical load	5400Pa

TEMPERFORMANCE RATINGS

Temperature coefficient (P_{max})	-0.35%/°C
Temperature coefficient (V_{oc})	-0.27%/°C
Temperature coefficient (I_{sc})	+0.05%/°C
Nominal operating cell temperature	45±2°C

PACKAGING CONFIGURATION

Container	40HQ
Quantity/pallet	31
Pallets/container	22
Quantity/container	704

ELECTRIC CHARACTERISTICS

Model of modules	XP-445W-72MET		XP-450W-72MET		XP-455W-72MET	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power – P_{mp} (W)	445	338	450	342	455	346
Open-circuit voltage – V_{oc} (V)	50.24	47.59	50.40	47.76	50.56	47.93
Short-circuit current – I_{sc} (A)	11.40	9.16	11.47	9.22	11.54	9.28
Maximum power voltage – V_{mp} (V)	41.17	38.81	41.30	38.94	41.44	39.01
Maximum power current – I_{mp} (A)	10.81	8.71	10.90	8.79	10.98	8.87
Module efficiency – η_m (%)	20.5%		20.7%		20.9%	
Module efficiency w/m²	204.7W		207.0W		209.3W	
Power tolerance (W)			(0, +5)			
Maximum system voltage (V)			1500V			
Maximum rated fuse current (A)			25A			
Current operating temperature (C)			-40°C ~ +85°C			

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/S