


● Brief Introduction

- 1) Applies to commercial areas.
- 2) Single pole structure takes full use of the ground space, achieve to convenient parking.
- 3) With good stability. Against high wind and snow load.
- 4) Can be customized.



Technical Parameters:	
Application:	Ground Open Area
Tilt:	0° - 15°
Module Layout:	Landscape or Portrait
Wind Load:	≤60m/s
Ground Clearance:	2.0m-3.2m
Snow Load:	0.5kn/m ² -2.0kn/m ²
Design Criteria:	ISO9001; CE; SGS; JIS8955: 2017
Material:	Q235 (Hot dip galvanized); SUS304

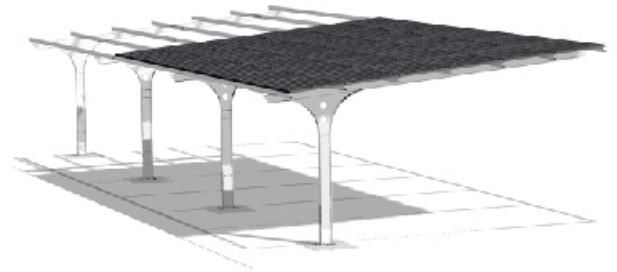

● Component Parts



Main Structure



Cross Beam



Beam Connector