



# solaico

paneles solares fotovoltaicos



HIGH EFFICIENCY  
MODULES



EASY INSTALLATION

**12**  
YEARS

MANUFACTURER  
WARRANTY

**25**  
YEARS

PANEL PERFORMANCE  
WARRANTY

## 24 V - SL 726 300/310/320/330 WP

Solaico photovoltaic modules are manufactured with high quality materials, certified and manufactured in Europe. Solaico has internal laboratories to verify the quality of the materials, and certifies its products to be operative in all the international markets.


Features:

- High efficiency modules.
- Ease of installation.
- 12-year warranty manufacturing product defect.
- 25-year panel performance warranty.

Packaging:


- Units/palet – 26 u
- Units/container 40' 28
- Units/container 728 U

\*Indicative data subject to change depending on the measurements of the glass.

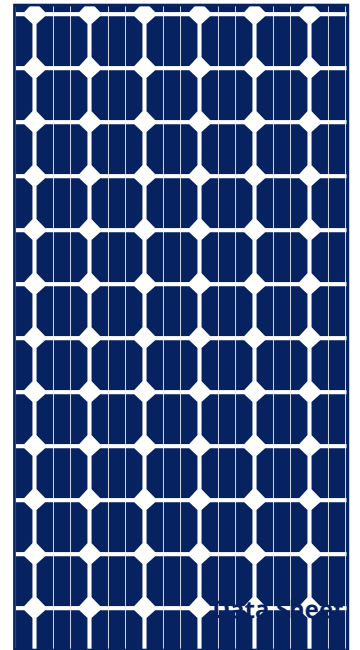


### Data Sheet

Maximum system voltage	1000 Vdc
Maximum series fuse rating	15 A
Reverse current limitations	15 A
Operating temperature range	-40°C / +85 °C
Coefficient temperature Pmax	-0,42% / °C
Coefficient temperature Voc	-0,32% / °C
Coefficient temperature Isc	0'05 % / °C
Solar cable	4mm2
Connectors	MC4 or compatibles

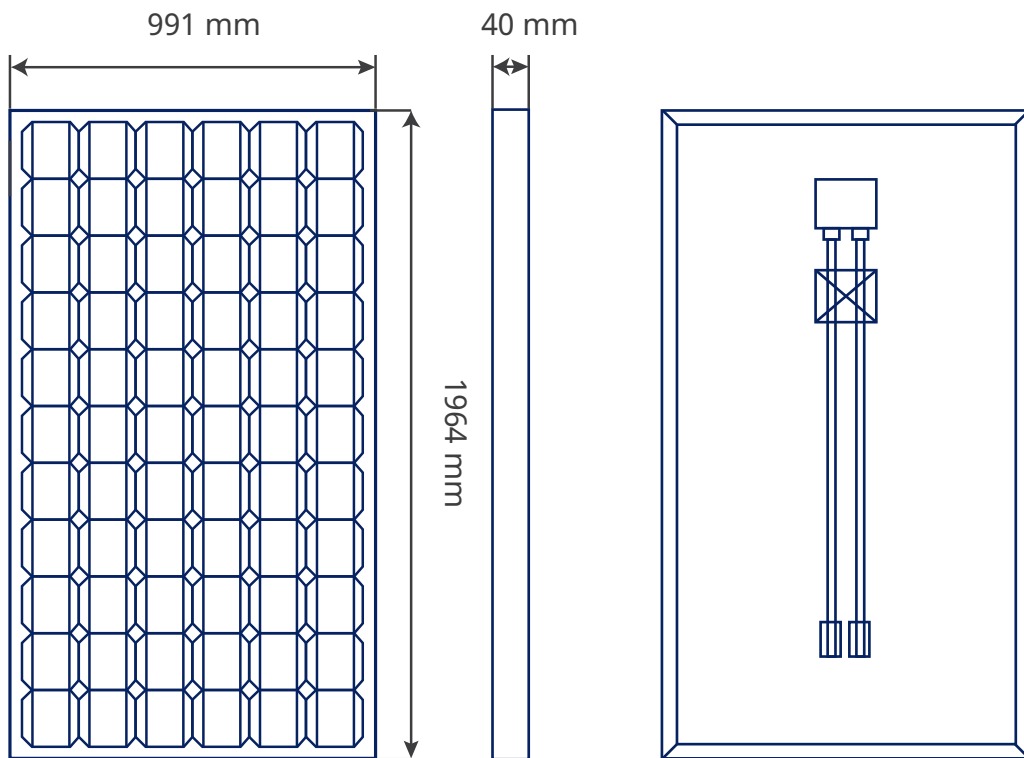

Characteristics	300 WP	310 WP	320 WP	330 WP
Maximum power (P <sub>MAX</sub> )	300 WP	310 WP	320 WP	330 WP
Maximum Power Voltage (V <sub>MP</sub> )	37,42 V	37,72 V	40,1 V	38,07 V
Maximum power (I <sub>MP</sub> )	8,02 A	8,22 A	7,99 A	8,67 A
Open circuit voltage (V <sub>OC</sub> )	44,08 V	44,97 V	49,5 V	46,78 V
Short circuit current (I <sub>SC</sub> )	8,58 A	9,05 A	8,60 A	9,12 A
A Panel Efficiency	16 %	16,5 %	16,5 %	16,5%
Panel Weight	23,5 Kg	23,5 Kg	23,5 kg	23,5 kg

**Notes:**



HIGH EFFICIENCY  
MODULES



EASY INSTALLATION



PANEL PERFORMANCE  
WARRANTY



MANUFACTURER  
WARRANTY