

# Blue Shark Series

## JHM4/60GD



JingHua Energy High Efficiency Monocrystalline  
Double Glass Module Half-cut Cell Solar Module

No. of cells <b>120 CELL</b>	Power Output Range <b>360-385W</b>
Maximum System Voltage <b>1500V</b>	Maximum Efficiency <b>20.81%</b>



### High Output Power

The back side uses the reflected and scattered light in the environment to increase the power generation by 5% to 30% , The use of high quality cell and half-cell PERC technology enables modules up to 385W.



### High Reliability

Products through a variety of harsh environmental testing



### Lower Temperature Coefficients

Enhance power generation



### Reduce Shadow Loss

Effectively reduces the effect of shadow on the module surface




### Better Micro Crack Resistance

Minimize the impact by micro crack by limiting cell damage and potentially extending area




### Excellent Anti-PID Performance

2 times of industry standard Anti-PID test by TUV  
( 85°C/85%RH , 192h )

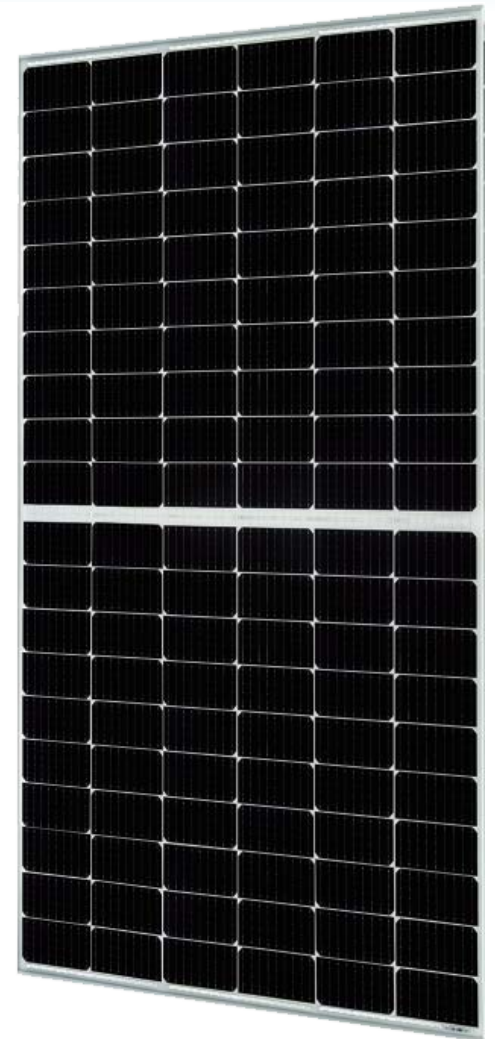

### LINEAR PERFORMANCE WARRANTY

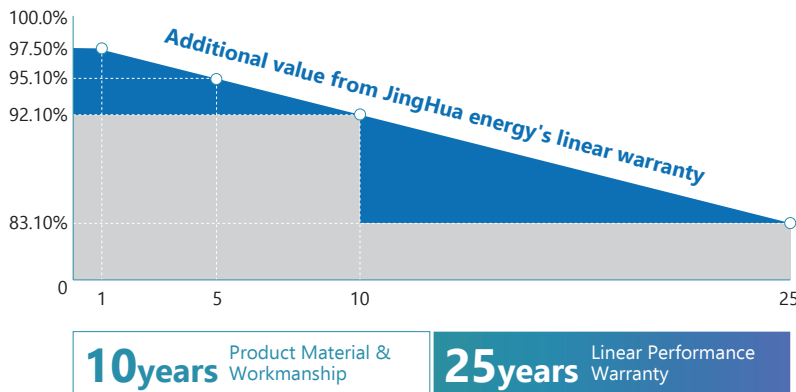


### Comprehensive Products and System Certificates




Swiss Re

IEC61215/61730:2016  
IEC62804(PID free)  
IEC62716(Ammonia)  
IEC61701(Salt fog)  
ISO9001/14001/45001


Module Dimension [ mm ]

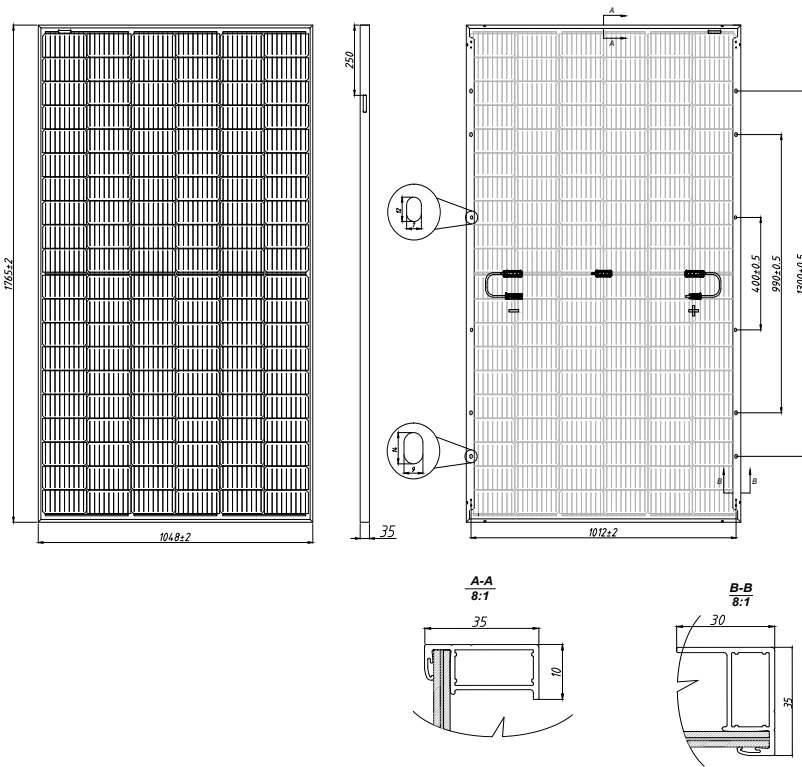

I-V/P-V Curve at Different Irradance (365W)

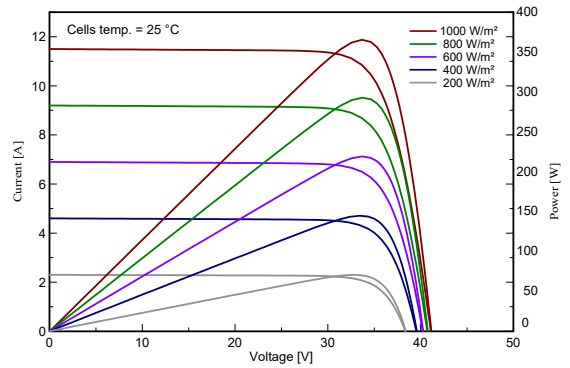

I-V Curve at Different Working Temperature (365W)

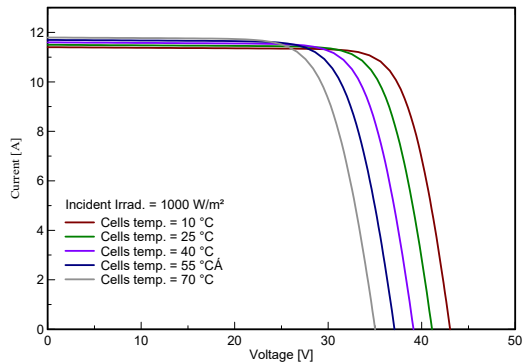

ELECTRICAL DATA

Module Type	JHM4/60GD360		JHM4/60GD365		JHM4/60GD370		JHM4/60GD375		JHM4/60GD380		JHM4/60GD385	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Peak Power (Pmax) (W)	360	270	365	274	370	277	375	281	380	285	385	289
Maximum Power Voltage (Vmp) (V)	33.7	31.4	33.9	31.6	34.1	31.8	34.3	32.0	34.5	32.2	34.7	32.4
Maximum Power Current (Imp) (A)	10.68	8.59	10.77	8.66	10.85	8.73	10.93	8.79	11.01	8.86	11.10	8.92
Open-circuit Voltage (Voc) (V)	40.9	38.7	41.1	38.9	41.3	39.1	41.5	39.3	41.7	39.5	41.9	39.7
Short-circuit Current (Isc) (A)	11.40	9.21	11.50	9.29	11.60	9.37	11.70	9.46	11.80	9.54	11.90	9.62
Module Efficiency	19.46%		19.73%		20.00%		20.27%		20.54%		20.81%	
Operating Temperature	-40°C~+85°C											
Maximum System Voltage	1500V											
Maximum Series Fuse Rating	20A											
Protection Class	Class II											
Power tolerance	0~+5W											

\*STC (Standard Test Condition): Irradiance 1000W/ m<sup>2</sup>, Module Temperature 25°C, AM 1.5

\* NMOT(Under Nominal Module Operating Temperature), Irradiance of 800W/ m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

MECHANICAL DATA

Cell Type	Mono-Crystalline
Cell Arrangement	120pcs (2×(6×10))
Dimension (L×W×H)	1765×1048×35mm
Weight	23.8kg
Front Cover	2.0mm+2.0mm Half Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable	4mm <sup>2</sup> /300mm
Connector	Staubli EVO2 or MC4 Compatible
Snow/Wind Load	5400Pa/2400Pa

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.38%
Temperature coefficient of Voc	-0.30%
Temperature coefficient of Isc	0.06%
NMOT	44±2°C

PACKING MANNER

Packing Type	40HQ
Piece/Pallet	30
Pallet/Container	26
Piece/Container	780

\*JingHua reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

\*Power measurement tolerance: ±3%

Version 2021.03 © Jiangsu JingHua new energy operation management Co., Ltd All Rights Reserved.