


# Green Technology Creates Golden Future

## PV-Module

## M3 series

10 years professional brand, 10 years quality pursue  
10 years professional photovoltaic products manufacturer

## Monocrystalline Module

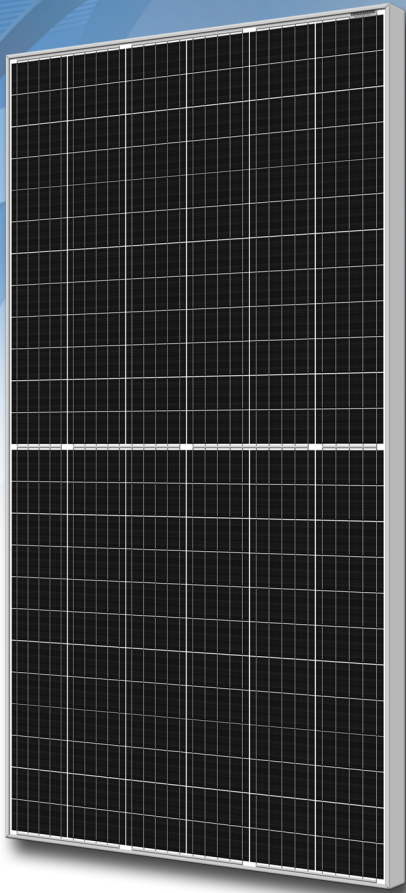

MYM3144-410

MYM3144-405

MYM3144-400

MYM3144-395

MYM3144-390

### KEY FEATURES



#### 5/6/9 Busbar Solar Cell

5/6/9 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



#### High Efficiency

Higher module conversion efficiency (up to 20.38%) benefit from half cell structure (low resistance characteristic).



#### PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



#### Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.




#### Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



#### Durability Against Extreme Environmental Conditions

Resistance to high salt mist and ammonia.

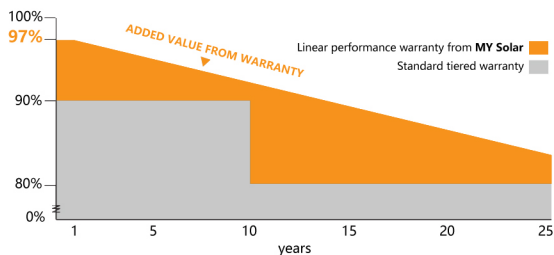

25 25-year performance warranty

10 10-year warranty on materials and workmanship


Product quality standards with reference to



[www.mypvtech.com](http://www.mypvtech.com)

M/MY-PD-CH-ENG20200101

## Engineering Drawings

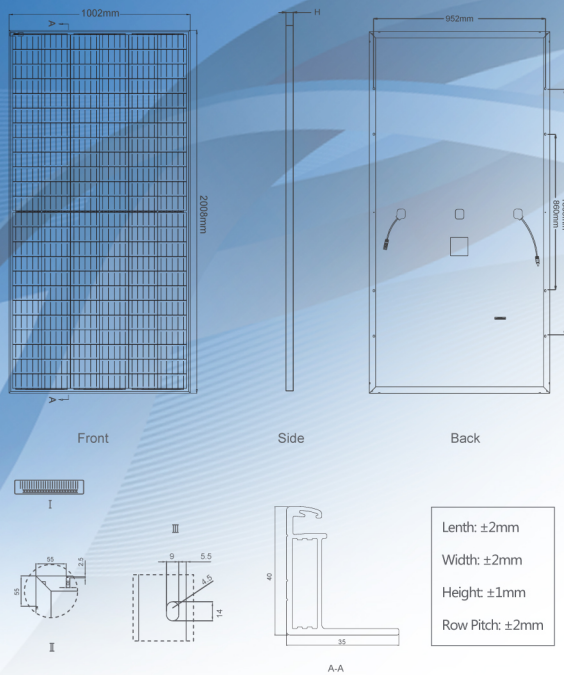


## Packaging Configuration

(Two pallets=One stack)

27pcs/pallet, 54pcs/stack, 594pcs/40'HQ Container

## Electrical Performance & Temperature Dependence

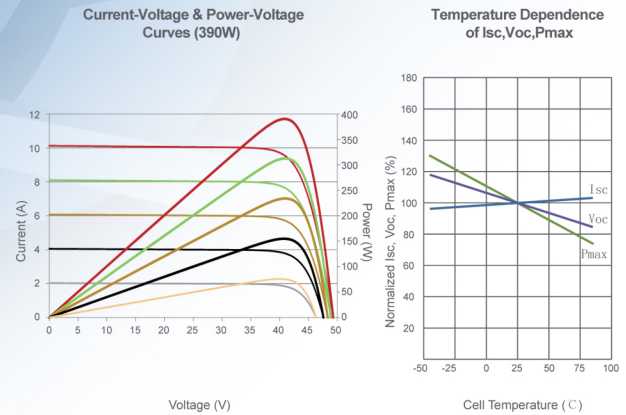

## Mechanical Characteristics

Cell Type	Mono PERC 158.75×158.75mm
No. of Half-cells	144 (6×24)
Dimensions	2008×1002×40mm (79.06×39.45×1.57 inch)
Weight	22.5 kg (49.6 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1x4.0mm <sup>2</sup> , (+) 290mm, (-) 145mm or Customized Length

## SPECIFICATIONS

Module Type	MYM3144-390		MYM3144-395		MYM3144-400		MYM3144-405		MYM3144-410	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	390Wp	294Wp	395Wp	298Wp	400Wp	302Wp	405Wp	306Wp	410Wp	310Wp
Maximum Power Voltage (Vmp)	41.1V	39.1V	41.4V	39.3V	41.7V	39.6V	42.0V	39.8V	42.3V	40.0V
Maximum Power Current (Imp)	9.49A	7.54A	9.55A	7.60A	9.60A	7.66A	9.65A	7.72A	9.69A	7.76A
Open-circuit Voltage (Voc)	49.3V	48.0V	49.5V	48.2V	49.8V	48.5V	50.1V	48.7V	50.4V	48.9V
Short-circuit Current (Isc)	10.12A	8.02A	10.23A	8.09A	10.36A	8.16A	10.48A	8.22A	10.60A	8.26A
Module Efficiency STC (%)	19.38%		19.63%		19.88%		20.13%		20.38%	
Operating Temperature (°C)	-40°C~+85°C									
Maximum System Voltage	1000/1500VDC (IEC)									
Maximum Series Fuse Rating	20A									
Power Tolerance	0~+3%									
Temperature Coefficients of Pmax	-0.35%/°C									
Temperature Coefficients of Voc	-0.29%/°C									
Temperature Coefficients of Isc	0.048%/°C									
Nominal Operating Cell Temperature (NOCT)	45±2°C									

STC: ☀ Irradiance 1000W/m<sup>2</sup>

📱 Cell Temperature 25°C

☁ AM=1.5

NOCT: ☀ Irradiance 800W/m<sup>2</sup>

📱 Ambient Temperature 20°C

☁ AM=1.5

🌀 Wind Speed 1m/s

\* Power measurement tolerance:  $\pm 3\%$

## MY SOLAR TECHNOLOGY CO.,LTD.

Add : No18,Yanxing Road,Yanqiao,Huishan Economic Development District,Wuxi

Tel : +86 510 8299 1188

Fax : +86 510 8299 1688

E-mail : info@mypvtech.com



www.mypvtech.com

M/MY-PD-CH-ENG20200101