

# EG-(SERIES)P60-C AR COATED GLASS

Commitment of EGing PV to continuous improvement in techniques and knowhow for manufacturing ensures the high quality of EGing Modules. They deliver high performance with stable efficiency for wide variety of applications ranging from roof systems of different sizes to large and utility scale solar farms.



## EGing Module Features

### Flexible Size:

EGing supply chain management expertise makes possible customer tailored module solutions for different systems and applications.

Product Warranty: 10 years for product workmanship

Guaranteed power output:

25-year linear power output warranty

Guaranteed by:

By the international, domestic well-known certification authority issued a certificate

- TUV,IEC 61215,IEC 61730
- VDE,IEC 61215,IEC 61730
- MCS
- CE
- CQC



## ELECTRICAL CHARACTERISTICS

Maximum Power(W)	260	265	270	275	280
Power Tolerance(%)	0~+3	0~+3	0~+3	0~+3	0~+3
Maximum Power Voltage(V)	30.88	31.14	31.40	31.66	31.90
Maximum Power Current(A)	8.42	8.51	8.6	8.69	8.78
Open Circuit Voltage(V)	37.75	38.08	38.41	38.74	39.01
Short Circuit Current(A)	8.98	9.05	9.12	9.19	9.27
Module Efficiency(%)	15.90	16.20	16.50	16.80	17.10
Maximum System Voltage(V)	1000	1000	1000	1000	1000
Maximum Reverse Current(A)	20	20	20	20	20
Temperature Coefficient	Pmax	%/°C	-(0.43±0.05)		
	Isc	%/°C	0.04±0.015		
	Voc	%/°C	-(0.325±0.1)		


### Standard Test Condition:

Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM1.5

## MECHANICAL CHARACTERISTICS

Number of Cells	pcs	60
Size of Cell	mm	156X156
Size of Module	mm	1650X990X35
Weight	kg	18.6
Connector		MC4 compatible

## IV CURVES

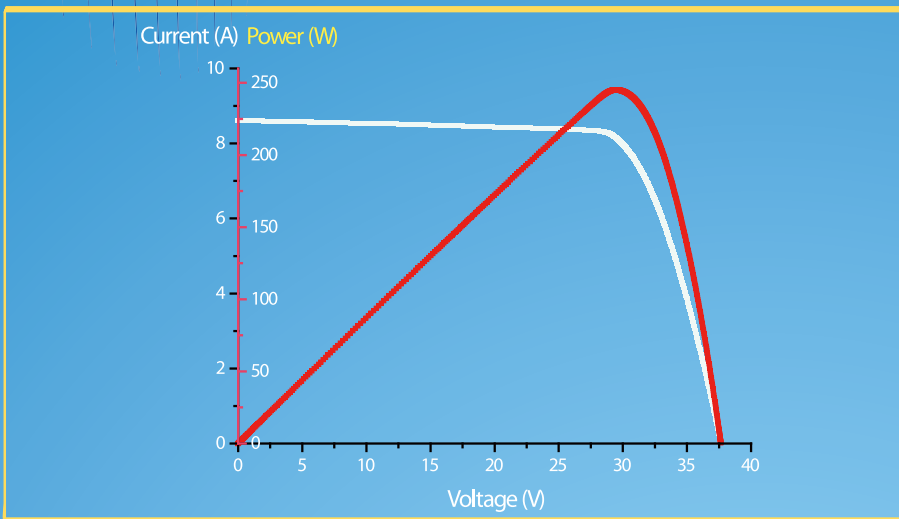

## ABSOLUTE MAXIMUM RATINGS

Temperature Range (°C)	-40°C~+85°C
Surface Maximum Load Capacity(Pa)	5400
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

