


EXIDE

SOLAR PV
MODULES

EXIDE

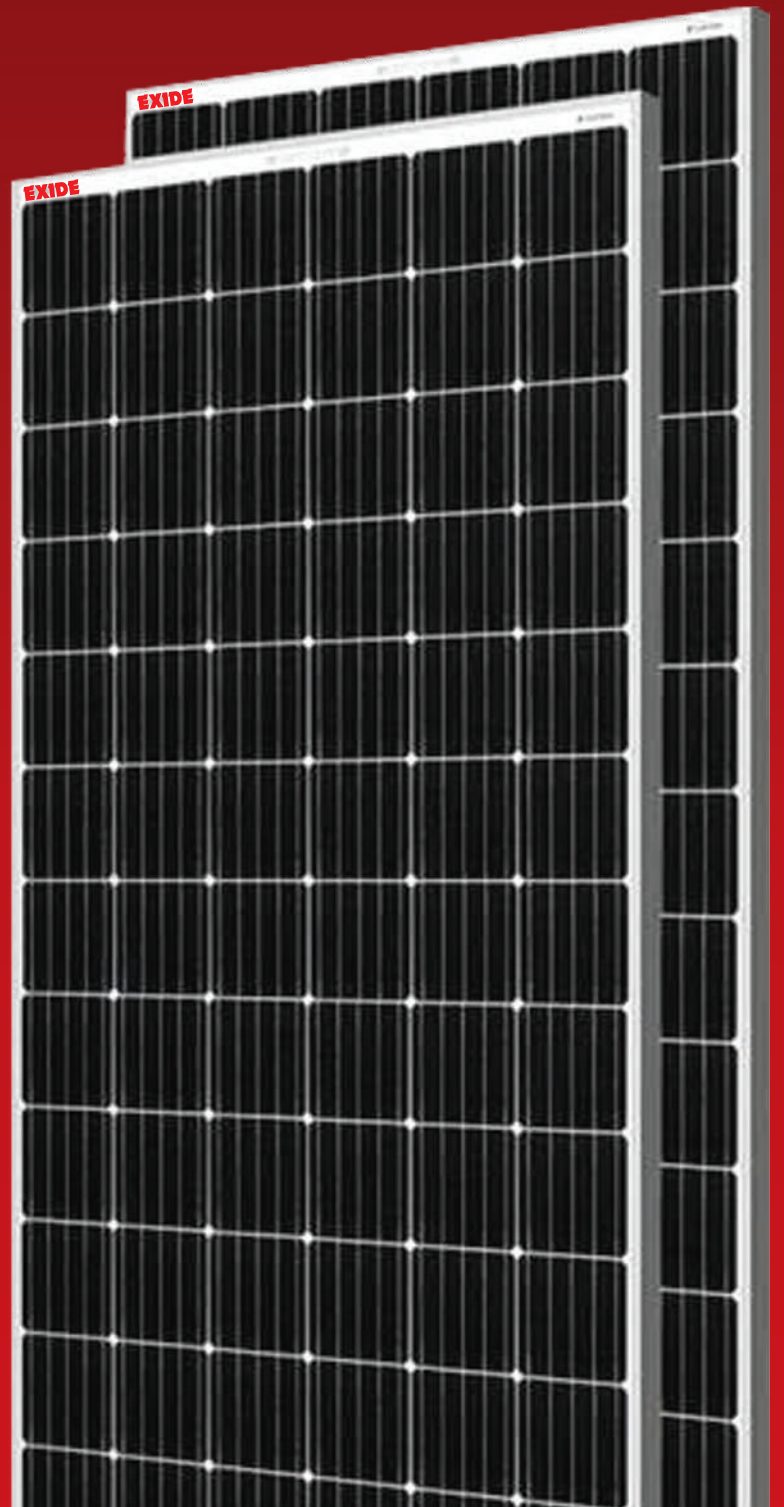

MONO PERC SERIES

Exide Mono PERC Solar Modules offer several advantages over conventional solar modules due to their enhanced capability to absorb light. This allows user to opt for more module placement options without compromising much on the plant performance. Higher module efficiency ensure better payback period and value extraction from the system.

FEATURES: High module efficiency • PID resistant • 10 years of product warranty • 25 years of limited power output warranty • IP67 rated junction box suitable for outdoor application • Suitable for standard 1000V systems • Positive power tolerance

APPLICATIONS: Rooftop On-grid PV systems • Rooftop Off-grid and Hybrid PV Systems • Ground-mounted solar parks • Microgrids

SPECIFICATIONS

Model	SP24EXIDE375	SP24EXIDE400
Electrical Characteristics*		
Pmax (Wp)	375	400
Power tolerance	+5W	
Module Efficiency (%)	19.32	19.86
Vmp (V)	41.46	42.42
Imp (A)	9.05	9.45
Voc (V)	48.40	49.23
Isc (A)	9.86	10.24
NOCT (°C)	45±2	
Maximum System Voltage (V)	1000	
Mechanical Characteristics		
Cell Type	Monocrystalline PERC	
Number of Cells/Arrangement	72 / 6 x 12	
Output Cable (CSA/Length)	4mm ² / 1000mm	
Connector	MC4 compatible	
Front cover	ARC coated, high transmission, low iron, tempered glass (3.2mm)	
Encapsulation	EVA	
Junction Box	IP67 (3 diode)	
Frame	35mm Anodized aluminium alloy	
Maximum front/rear load	5400 Pa / 2400 Pa	
Dimension- L x W x T (mm)	2002 x 1006 x 35	
Weight (kg)	23	

*All data measured in STC

Operational Characteristics	
Operating Temperature Range	-40 to 85°C
Maximum Relative Humidity (%)	85%
Temp. Co-efficient of Voltage	-0.29%/°C
Temp. Co-efficient of Current	0.05%/°C
Temp. Co-efficient of Power	-0.38%/°C

STC: 1000 W/m² irradiance, AM 1.5 spectrum and 25°C cell temperature

NOCT conditions: 800 W/m² irradiance, ambient temperature 25°C, wind speed 1m/sec

WARRANTY & CERTIFICATIONS

Product warranty: 10 years

Performance guarantee: 25 years power output guarantee with 90% power output at the end of 12 years and not less than 80% power output at the end of 25 years

Certifications¹: IS 14286, IEC 61215, IEC 61730- 1&2, IEC 61701, IEC 62804

¹All certifications are in progress

EXIDE

Head Office: 59E Chowringhee Road, Kolkata- 700 020, Phone (033) 2283 2120/33/36/50/51/71/2238/39, Fax (033) 2283 2632/37

Corporate Marketing Office: 6A Hatibagan Road, Entally, Kolkata- 700 014, Phone (033) 2286 6158/6159, Fax (033) 2286 6186, E-Mail: indicare@exide.co.in

Regional Offices: **New Delhi,** 'Exide House', 8/42 Kirtinagar Industrial Area, Opposite MDH Spice Factory, New Delhi - 110015, Phone: (011) 4144 0293/0068/ 0927/4238 1581//4237 6282/4243 3023/ 3453/ 4235 2085, **Chennai:** Exide Industries Limited, New No. 824/2, Old No. 398, Third Floor, Anna Salai, Nandanam, Chennai - 600 035 (Before Hyundai Showroom), Phone (044) 4907 5100, (044) 4907 5125, Fax (044) 4907 5126, **Mumbai:** 'RAHEJAS', 5th Floor, 8C Main Avenue, V P Road, Santacruz (West), Mumbai - 400 054, Phone (022) 2646 5283/84, Fax (022) 2646 5042, **Kolkata:** 6A Hatibagan Road, Entally, Kolkata - 700 014, Phone (033) 2284 3137/3168/3169, Fax (033) 2289 7455

For any sales query mail us: sudiptab@exide.co.in/jaymalyas@exide.co.in | Visit us: www.exideindustries.com | Call us: Toll Free No. 1800-103-5454

This catalogue is issued to provide outline information only and is not deemed to form part of an offer or contract. Our policy is one of continued improvement and we reserve the right to change details without prior notice.

