


#### Pitched roof mounting system

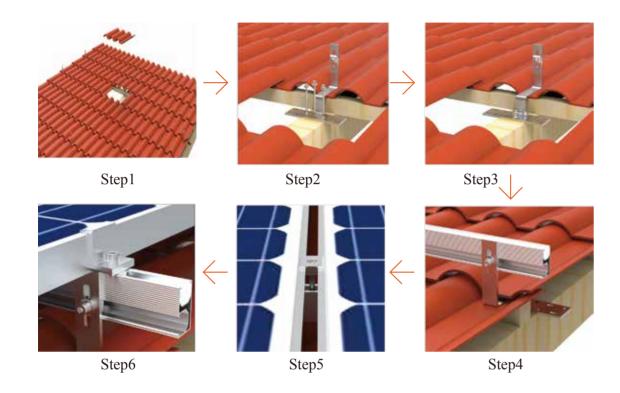

# Installation steps

Advantage

• Warranty: 12 years;

• Duration: 25 years;

• Easy installation;

• High strength anti-uv high frequency insulation (Design standard: JIS C 8955: 2011 GB 50009-2012 IBC 2009 CBC 2010;

• Chemical resistance&weatherablity (certificate: AS / NZS 1170、 MCS、 CSA etc);

• Max wind speed: 60m/s;

• Material: Al 6005-T5;

• Anti-corrosive: anodized;

• Warranty: 12 years;

• Duration: 25 years.



#### Pitched roof mounting system

Multiple choice-applicated in slate roof hook and roman tile roof hook; Different angle and adjustable.

## Slate roof hook



### Tile roof hook



01