

Blue Shark Series

JHM3/72GD



JingHua Energy High Efficiency Monocrystalline
Double Glass Module Half-cut Cell Solar Module

No. of cells Power Output Range
144 CELL **400-420W**

Maximum System Voltage Maximum Efficiency
1500V **20.87%**



High Output Power

The back side uses the reflected and scattered light in the environment to increase the power generation by 5% to 30% , The use of high quality cell and half-cell PERC technology enables modules up to 420W.



High Reliability

Products through a variety of harsh environmental testing



Lower Temperature Coefficients

Enhance power generation



Reduce Shadow Loss

Effectively reduces the effect of shadow on the module surface




Better Micro Crack Resistance

Minimize the impact by micro crack by limiting cell damage and potentially extending area




Excellent Anti-PID Performance

2 times of industry standard Anti-PID test by TUV
(85°C/85%RH , 192h)

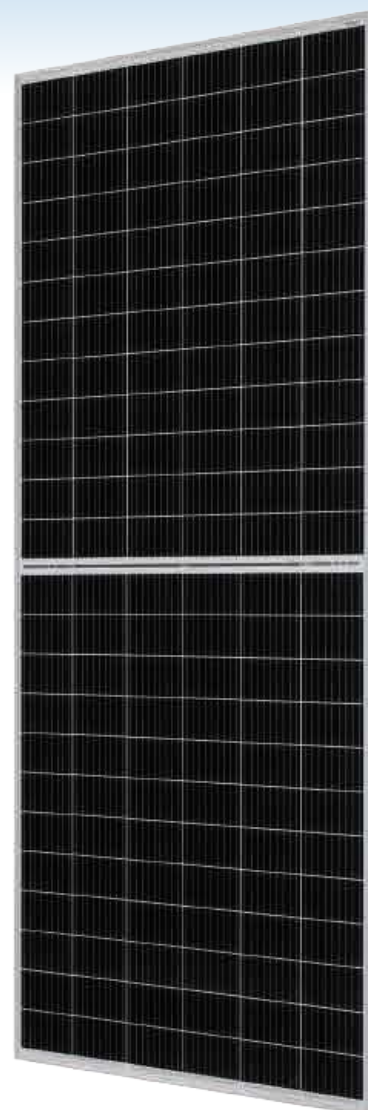

LINEAR PERFORMANCE WARRANTY

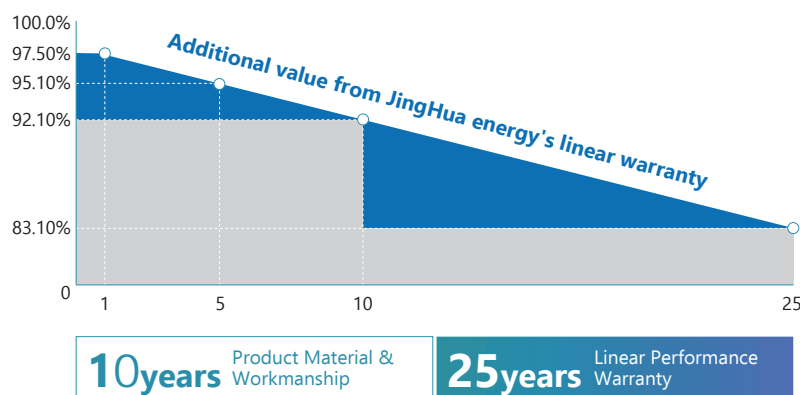


Comprehensive Products And System Certificates




Swiss Re

IEC61215/61730:2016
IEC62804(PID free)
IEC62716(Ammonia)
IEC61701(Salt fog)
ISO9001/14001/45001


Module Dimension[mm]

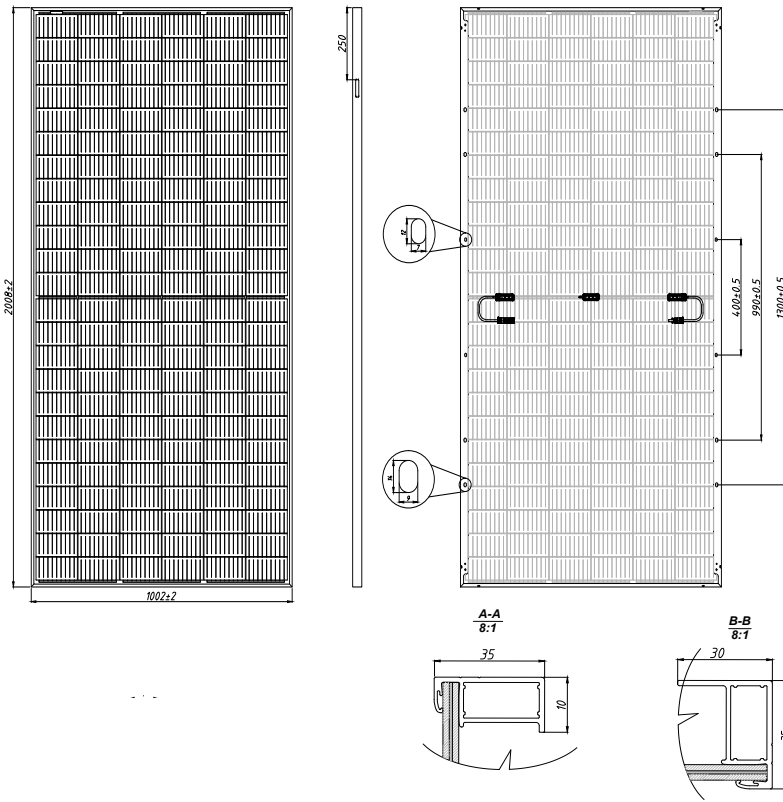

I-V Curve at Different Irradance (405W)

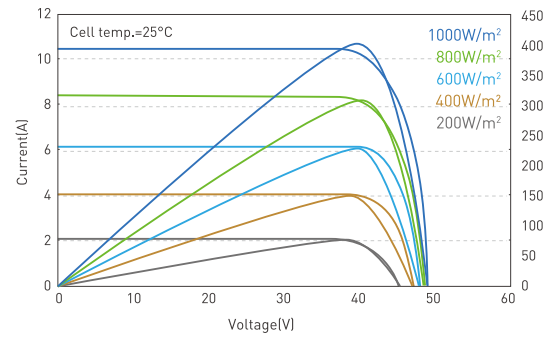

I-V Curve at Different Working Temperature (405W)

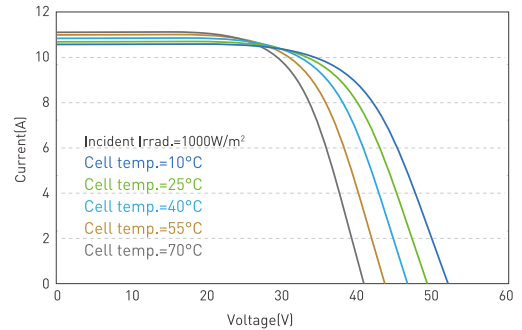

ELECTRICAL DATA

Module Type		JHM3/72GD400		JHM3/72GD405		JHM3/72GD410		JHM3/72GD415		JHM3/72GD420	
		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Peak Power (Pmax)	(W)	400	300	405	304	410	307	415	311	420	315
Maximum Power Voltage (Vmp)	(V)	40.8	38.0	41.1	38.3	41.4	38.6	41.7	38.9	42.0	39.2
Maximum Power Current (Imp)	(A)	9.80	7.89	9.85	7.93	9.90	7.97	9.95	8.01	10.00	8.03
Open-circuit Voltage (Voc)	(V)	48.9	46.3	49.1	46.5	49.3	46.7	49.5	46.9	49.7	47.1
Short-circuit Current (Isc)	(A)	10.33	8.35	10.37	8.38	10.41	8.41	10.45	8.45	10.49	8.49
Module Efficiency		19.88%		20.13%		20.38%		20.63%		20.87%	
Operating Temperature		-40°C~+85°C									
Maximum System Voltage		1500V									
Maximum Series Fuse Rating		20A									
Protection Class		Class II									
Power tolerance		0~+5W									

*STC (Standard Test Condition): Irradiance 1000W/ m², Module Temperature 25°C, AM 1.5

*NMOT(Under Nominal Module Operating Temperature), Irradiance of 800W/ m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

MECHANICAL DATA

Cell Type	Mono-Crystalline
Cell Arrangement	144pcs (2×(6×12))
Dimension (L×W×H)	2008×1002×35mm
Weight	25kg
Front Cover	2.0mm+2.0mm Half Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable	4mm²/300mm
Connector	Staubli EVO2 or MC4 Compatible
Snow/Wind Load	5400Pa/2400Pa

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.38%
Temperature coefficient of Voc	-0.30%
Temperature coefficient of Isc	0.06%
NMOT	44±2°C

PACKING MANNER

Packing Type	40HQ
Piece/Pallet	30
Pallet/Container	22
Piece/Container	660

*JingHua reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

*Power measurement tolerance: ±3%

Version 2021.03 © Jiangsu JingHua new energy operation management Co., Ltd All Rights Reserved.