



SBB MONO PERC/MONO CRYSTALLINE SOLAR PV MODULES



PATANJALI

Anant Urja Srot...

www.patanjalirenewable.com

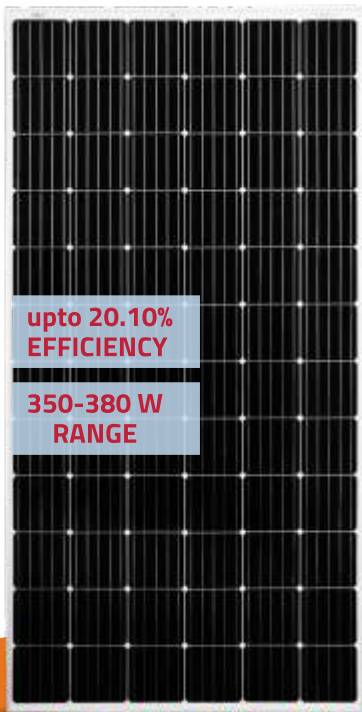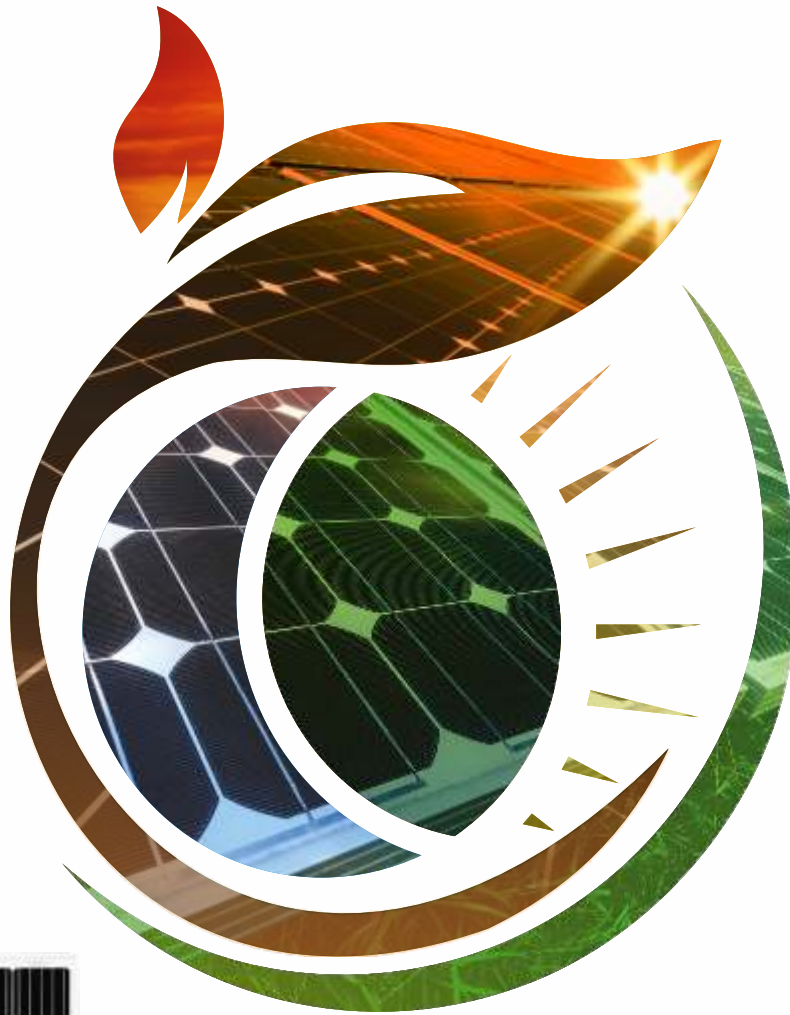

upto 20.10%
EFFICIENCY

350-380 W
RANGE

- EXTREMELY **RELIABLE PRODUCT** SUITING ALL ENVIRONMENT CONDITIONS
- **100% EL TESTED** TO ENSURE DEFECT FREE MODULES
- CERTIFIED FOR **PID RESISTANCE**
- CERTIFIED FOR **SALT MIST CORROSION RESISTANCE**
- SUPERIOR **LOW LIGHT** IRRADIATION PERFORMANCE 200W/m²
- **POSITIVE** GUARANTEED TOLERANCE

APPLICATIONS

- Solar pumping applications
- Off grid residential systems
- On-grid rooftop residential, commercial and industrial roof top installations

PREL/ENG/TDS/01-Rev. 00



TECHNICAL DATA

MONO PERC/MONO CRYSTALLINE 72 CELL MODULE SERIES

Electrical Data All Data refers to STC (AM 1.5, 1000 W/m², 25°C)

S. No.	MODEL	PREL 350W	PREL 355W	PREL 360W	PREL 355W	PREL 370W	PREL 375W	PREL 380W
1	Peak power, (0~ + 4.99 Wp) Pmax (Wp)	350	355	360	365	370	375	380
2	Maximum voltage, Vmpp (V)	38.10	38.20	38.30	38.40	38.40	38.50	38.60
3	Maximum current, Impp (A)	9.18	9.29	9.41	9.52	9.63	9.74	9.85
4	Open Circuit Voltage, Voc (V)	47.40	47.50	47.70	47.80	48.00	47.20	48.30
5	Short circuit current, Isc (A)	9.56	9.64	9.78	9.84	9.90	9.96	10.05
6	Module efficiency (%)	18.51	18.78	19.04	19.31	19.57	19.84	20.10

*STC: Irradiance 1000 W/m², cell temperature 25°C, air mass AM1.5 according to EN 60904-3.
Average efficiency reduction of 5 % at 200 W/m² according to EN 60904-1. Output Power - 0/+5W

Electrical parameters at NOCT

Power(Wp) at NOCT	259.60	263.70	267.70	272.10	276.20	280.02	282.99
V@Pmax(V) at NOCT	35.80	35.90	36.00	36.30	36.50	36.70	36.80
I@Pmax (A) as NOCT	7.26	7.34	7.43	7.51	7.57	7.63	7.69
Voc (V) at NOCT	43.80	43.90	44.10	44.20	44.30	44.40	44.50
Isc (A) at NOCT	7.73	7.80	7.91	7.96	8.01	8.06	8.10

NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Temperature co-efficients (TC) permissible operating conditions

TC of open circuit voltage (β)	-0.27 % /°C
TC of short circuit current (α)	-0.060 % /°C
TC of power (γ)	-0.380 % /°C
Maximum system voltage	1000/1500 V
NOCT	46°C ± 2°C
Temperature range	-40°C to + 85°C

Mechanical Data

Length x Width x Height	1961 x 991 x 40 mm
Weight	21.5 kg ± 0.500 kg
Junction Box	IP67 / IP68 3 Bypass diodes
Cable & Connectors	1000mm/1200mm length cables & MC4 Connectors
Application Class	Class A (Safety Class II)
Superstrate	High transmittance ARC Glass
Cells	72 Mono PERC / Monocrystalline, 5BB Solar Cells
Cell Encapsulant	EVA (Ethylene Vinyl Acetate)
Back Sheet	Composite Film
Frame	Anodized aluminium frame with twin wall profile
Mechanical Load Test	5400 pa-front ; 2400 pa-back
Maximum Series Fuse Rating	15 A

Warranty and Certifications

Product Warranty**	10 years
Performance Warranty**	Linear Power Warranty for 25 year with 2.5% for 1st year degradation and 0.67% from year 2 to year 25
Approvals and certificates :	

* Module Efficiency as per Aperture area


** Refer to PATANJALI RENEWABLE ENERGY'S warranty document for terms and conditions.

CAUTION : READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.


specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.

PREL/ENG/TDS/01-Rev. 00


TDS-5BB-Mono-72 Cells

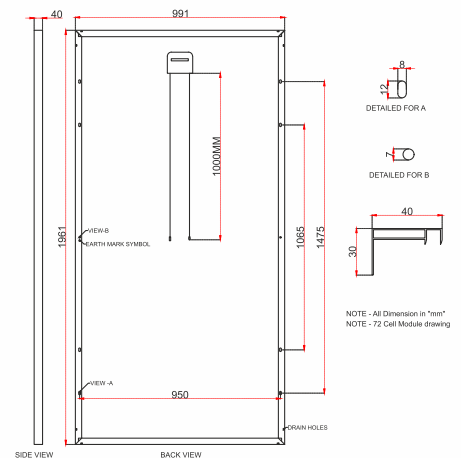

I-V Curve Variation With Irradiance



I-V Curve Variation With Irradiance



Packaging Information

Qty.: 25 in 1 Box

Qty.: 02 in 1 Box



Patanjali Renewable Energy Pvt. Ltd.

D-83-84-85, EPIP, UPSIDC, SITE-V, Kasna, Greater Noida, UP 201310.

Customer Care No. +91-971-160-6006

E-mail : info@patanjali-renewable.com | www.patanjalirenewable.com

Like Follow & Subscribe / PatanjaliSolar