


## 120 Watt Semi Flexible Solar Panel

Made with high efficiency sunpower back-contact solar cells


### Electrical Characteristics

Max Power	Pmax	120W
Max Power Voltage	Vmp	22.0V
Max Power Current	Imp	5.5A
Open Circuit Voltage	Voc	26.4V
Short Circuit Current	Isc	5.9A
Maximum System Voltage		600V
Series Fuse Rating		10A
Temperature Co-efficients		
	Power	-0.38%/°C
	Voltage	-60.8mV/°C
	Current	2.2mA/°C
Cell Efficiency		20.00%
Number of Cells in Series		40
Max Power tolerance		± 5%

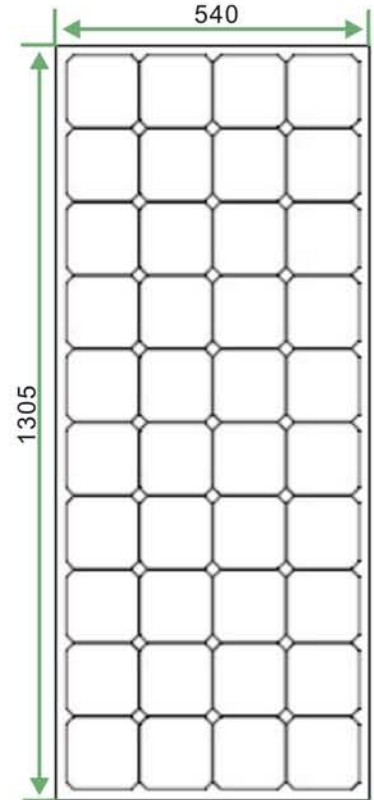

### Mechanical Characteristics

Weight	1.8KG
Dimension	1305*540*3mm
Cable	4.0mm <sup>2</sup> 90cm with MC4 Connector

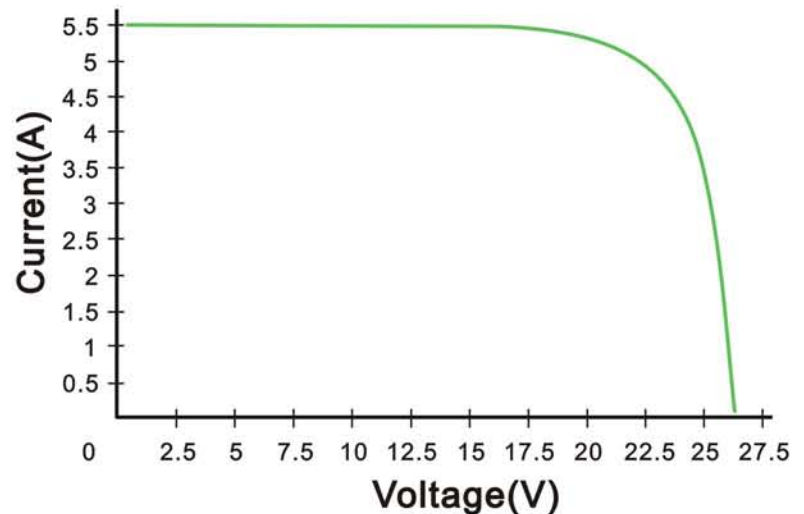

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m<sup>2</sup>, AM 1.5G, cell temperature 77°F / 25°C)