

**66**  
Series

# IBC MODULE Dual Glass

## 415 - 430w

NeX Series: SNX-C66HID

**21.8%**

Maximum Efficiency

**0-+5w**

Positive Power Tolerance

**30 years**

Product Warranty



### HIGHER VALUE


- Longer Warranty terms and more power generation
- Lower LCOE for shorter payback period
- Elegant Appearance without bus bar on front side

### HIGHER PERFORMANCE

- Module Power reaches up to 430W by high efficiency cells
- Less shading loss with IBC cell structure
- Zero Light Induced Degradation (LID)
- Better Performance under weak light weather

### MORE RELIABLE

- Excellent anti-PID performance
- Lower hot spot risks by back contact
- Low temperature co-efficient of Pmax
- Mechanical loading capability up to 5400Pa

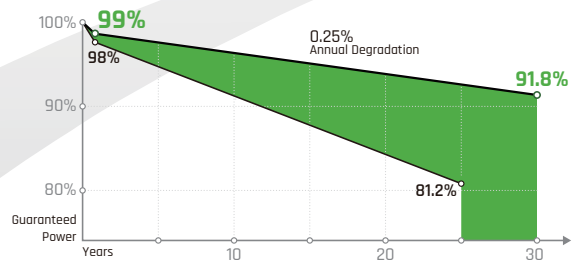

Sonnex IBC Module Performance Warranty

### Warranty

30 years product workmanship warranty, 30 years linear power output warranty. The power degradation for the first year will be less than 1%. From the 2nd year and onwards, the annual degradation will be less than 0.25%. Guaranteed performance ratio of 91.8% after 30 years.

**Sonnex Energie GmbH**

Add: Böttgerstraße 12, 20148 Hamburg, Germany  
www.sonnexenergie.com info@sonnexenergie.de

# 415 - 430W IBC MODULE SNX-C66HID

66 Series

## Electrical Characteristics at Standard Test Conditions(STC)

Module Type: SNX-C66HID-***M	415	420	425	430
Maximum Power-Pm [W]	415	420	425	430
Open Circuit Voltage-Voc [V]	45.8	45.9	46.0	46.1
Short Circuit Current-Isc [A]	11.56	11.66	11.76	11.86
Maximum Power Voltage-Vm [V]	38.6	38.8	39.0	39.2
Maximum Power Current-Im [A]	10.76	10.83	10.90	10.97
Module Efficiency-η [%]	21.0	21.3	21.5	21.8

## Electrical Characteristics at NMOT

Maximum Power-Pm [W]	312	316	320	324
Open Circuit Voltage-Voc [V]	43.9	44.0	44.1	44.2
Short Circuit Current-Isc [A]	9.33	9.41	9.49	9.57
Maximum Power Voltage-Vm [V]	36.0	36.2	36.4	36.6
Maximum Power Current-Im [A]	8.67	8.73	8.80	8.86

Note: 1. Standard Test Conditions (STC): Irradiance 1000 W/m<sup>2</sup>; AM 1.5; Ambient temperature 25°C ;  
 2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m<sup>2</sup>; wind speed 1m/s; ambient temperature 20°C.  
 3. Tolerance of Pm: 0--+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

## Mechanical Characteristics

Dimensions	1900×1039×30 mm
Weight	26kg
Glass	Front/Back side tempered glass, 2.0mm
Frame	Anodized aluminum alloy
Cells	Mono-crystalline IBC cell 166 x 83mm
Cell Orientation	132 (12×11)
Junction Box	IP68
Cable/Connectors	4mm <sup>2</sup> ,1400mm / MC4 or EV02

## Temperature Characteristics

NMOT	42 °C (±2°C)
Temperature Coefficient of Voc	-0.246% /°C
Temperature Coefficient of Isc	0.046% /°C
Temperature Coefficient of Pm	-0.29% /°C


## Maximum Ratings

Maximum System Voltage [V]	DC 1500V (IEC)
Series Fuse Rating [A]	20
Maximum Surface Load Capacity [Pa]	5,400
Temperature Range [°C]	- 40 to + 85
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m·s <sup>-1</sup>

## Other Characteristics

Packaging 33 pcs/pallet; 792 pcs/40' HQ container

## I-V curve

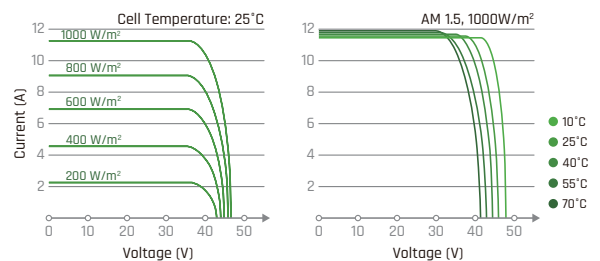

**Declaration:** Along with the technical improvement and product update, deviation between the technical parameter and Sonnex future products might occur. Specifications included in this datasheet are subject to change without prior notice. Sonnex reserves the right of final interpretation.

## Drawing

