




TUNGSU

166 series

Mono solar modules

144 cells double-glass multi-busbar  
half-cut modules

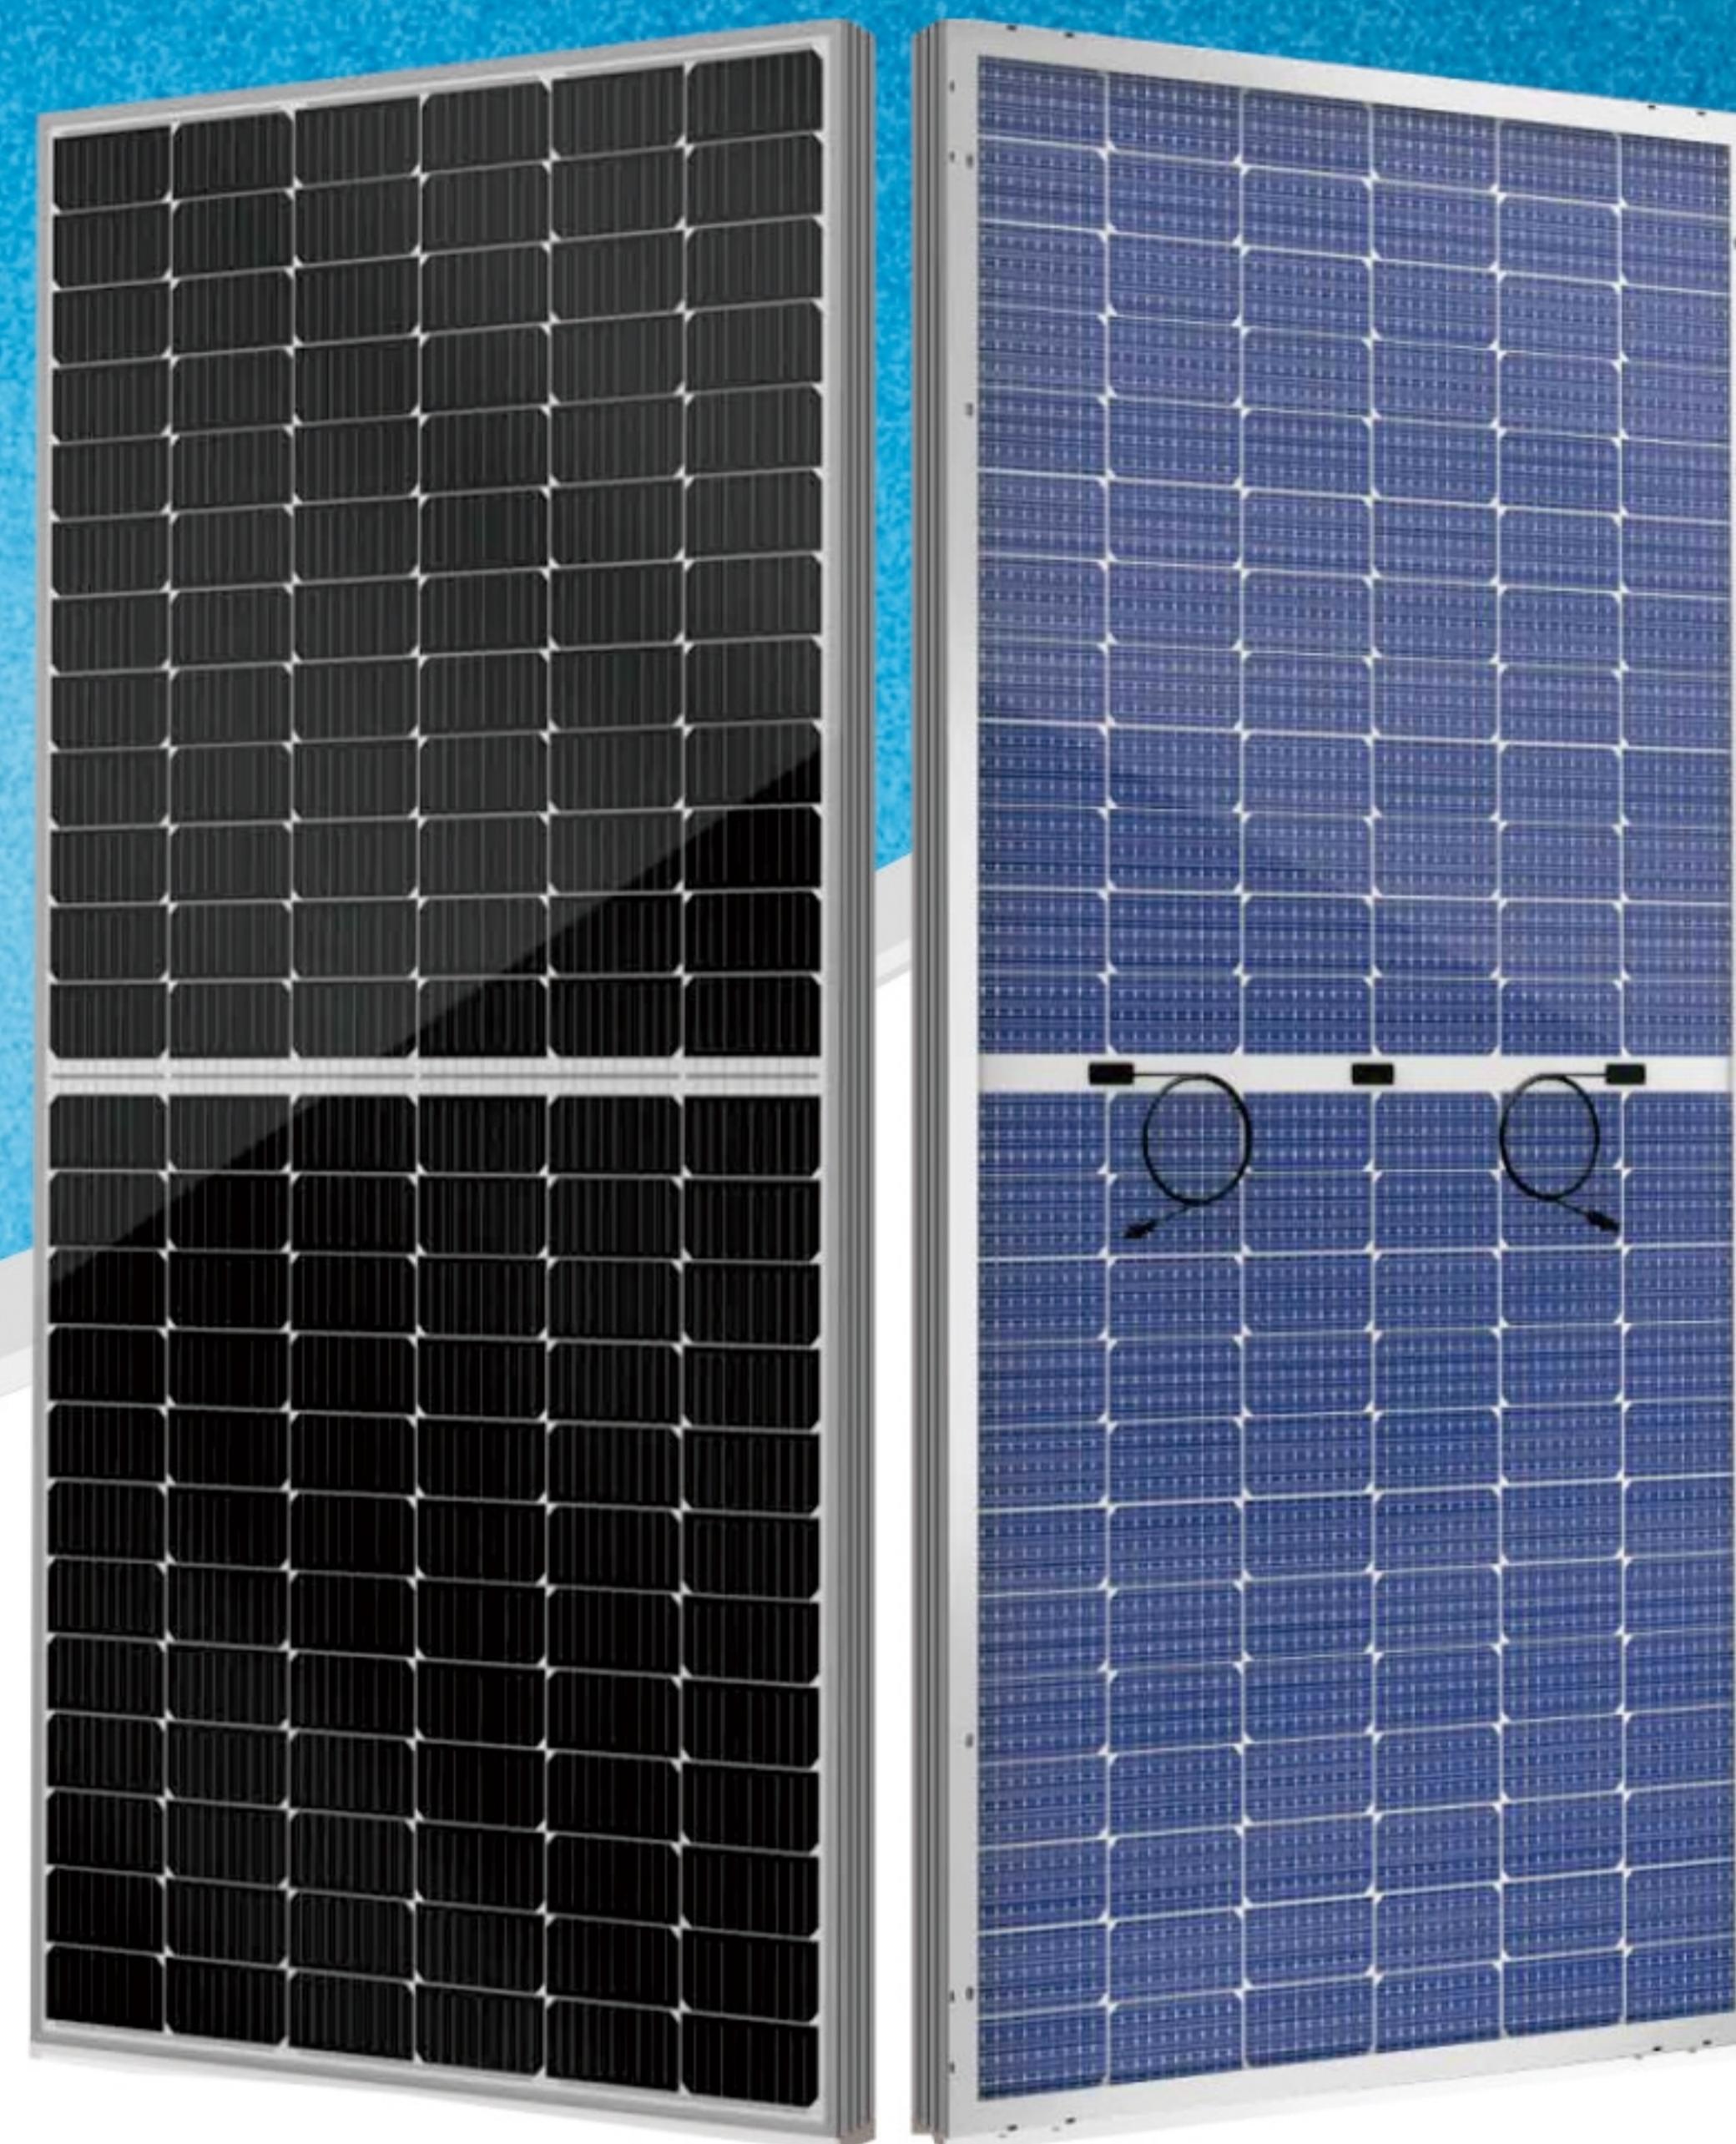

# 430-450W

## ► Tunghsu components with high efficiency and high reliability

- ★ Advanced production equipment, highly automated process control, world-class production technology
  - ★ The company has a product research and development laboratory that meets the new ISO/IEC international standards
  - ★ Excellent weak light performance, resistant to salt spray and ammonia corrosion.
- Passing the certification test of the PV standards.
- ★ Certified by international quality management and environmental management system
  - ★ Application grade:A, Safe grade: II , Fireproofing grade:C



### High power output

Double-sided power generation, higher power generation of the module  
Up to 450w front power and 20.7% module efficiency with half-cut and MBB  
Reduce BOS cost with higher power bin and 1500V system voltage



### Higher power generation

Lower temperature coefficient (-0.35%) and lower working temperature  
bring more power generation  
Half-cell technology brings stronger anti-shadow occlusion ability



### Highly reliable due to stringent quality control

In-house testing goes well beyond certification requirements  
(UV, TC, HF, PID resistant and many more)



### Certified to withstand the most challenging environmental conditions

2400 Pa wind load  
5400 Pa snow load


## ► Comprehensive Products And System Certificates

- IEC61215/IEC61730/UL1703/IEC61701/IEC62716  
ISO 9001: Quality Management System  
ISO 14001: Environmental Management System  
ISO 45001: Occupation Health and Safety Management System  
GB/T 23001–2017: Management system with Integration of Information Technology and Industrialization




## Industry-leading linear warranty

\*15 Year Product Warranty \*30 Year Linear Power Warranty

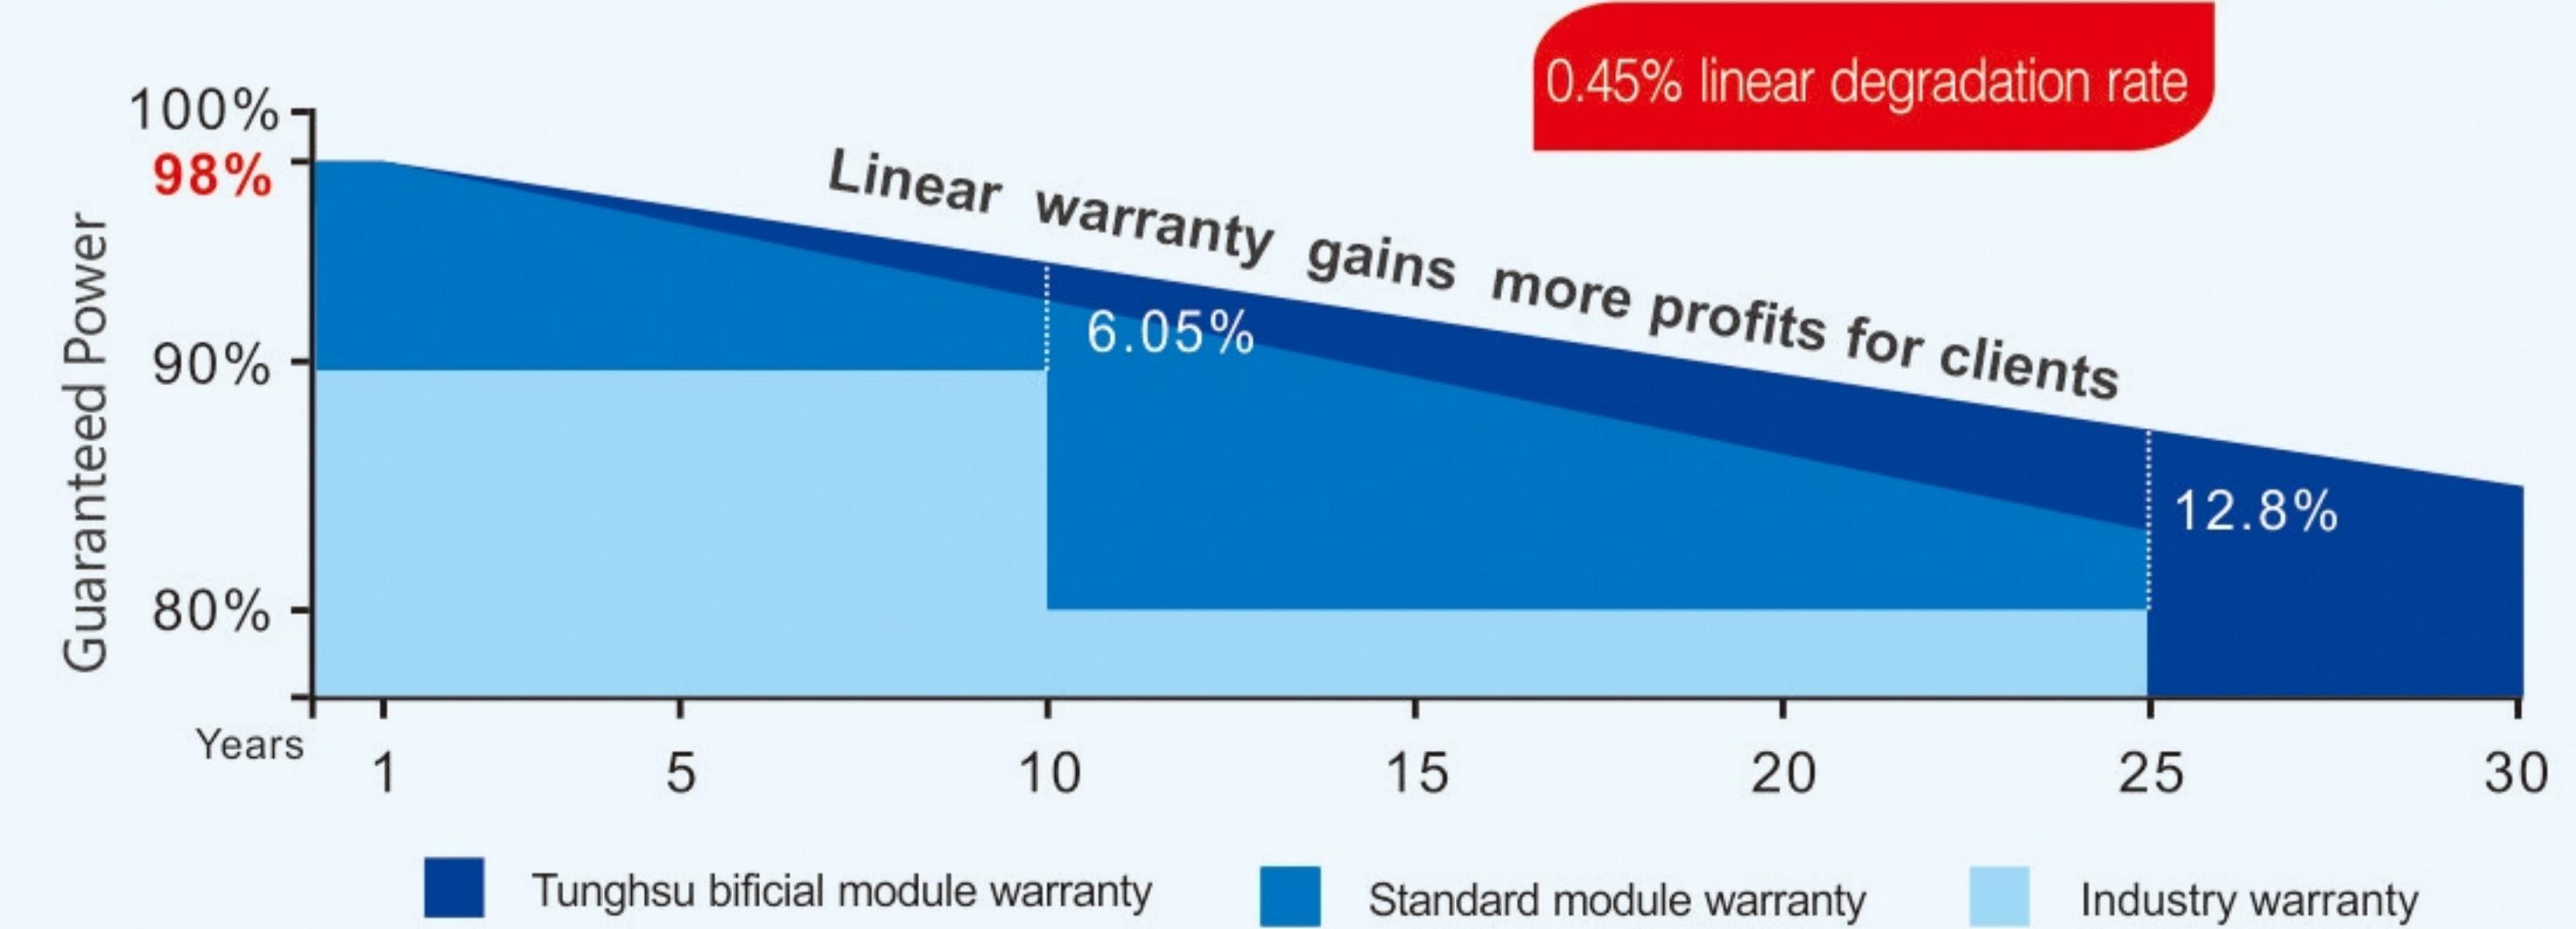

## DIMENSIONS OF PV MODULE(mm)

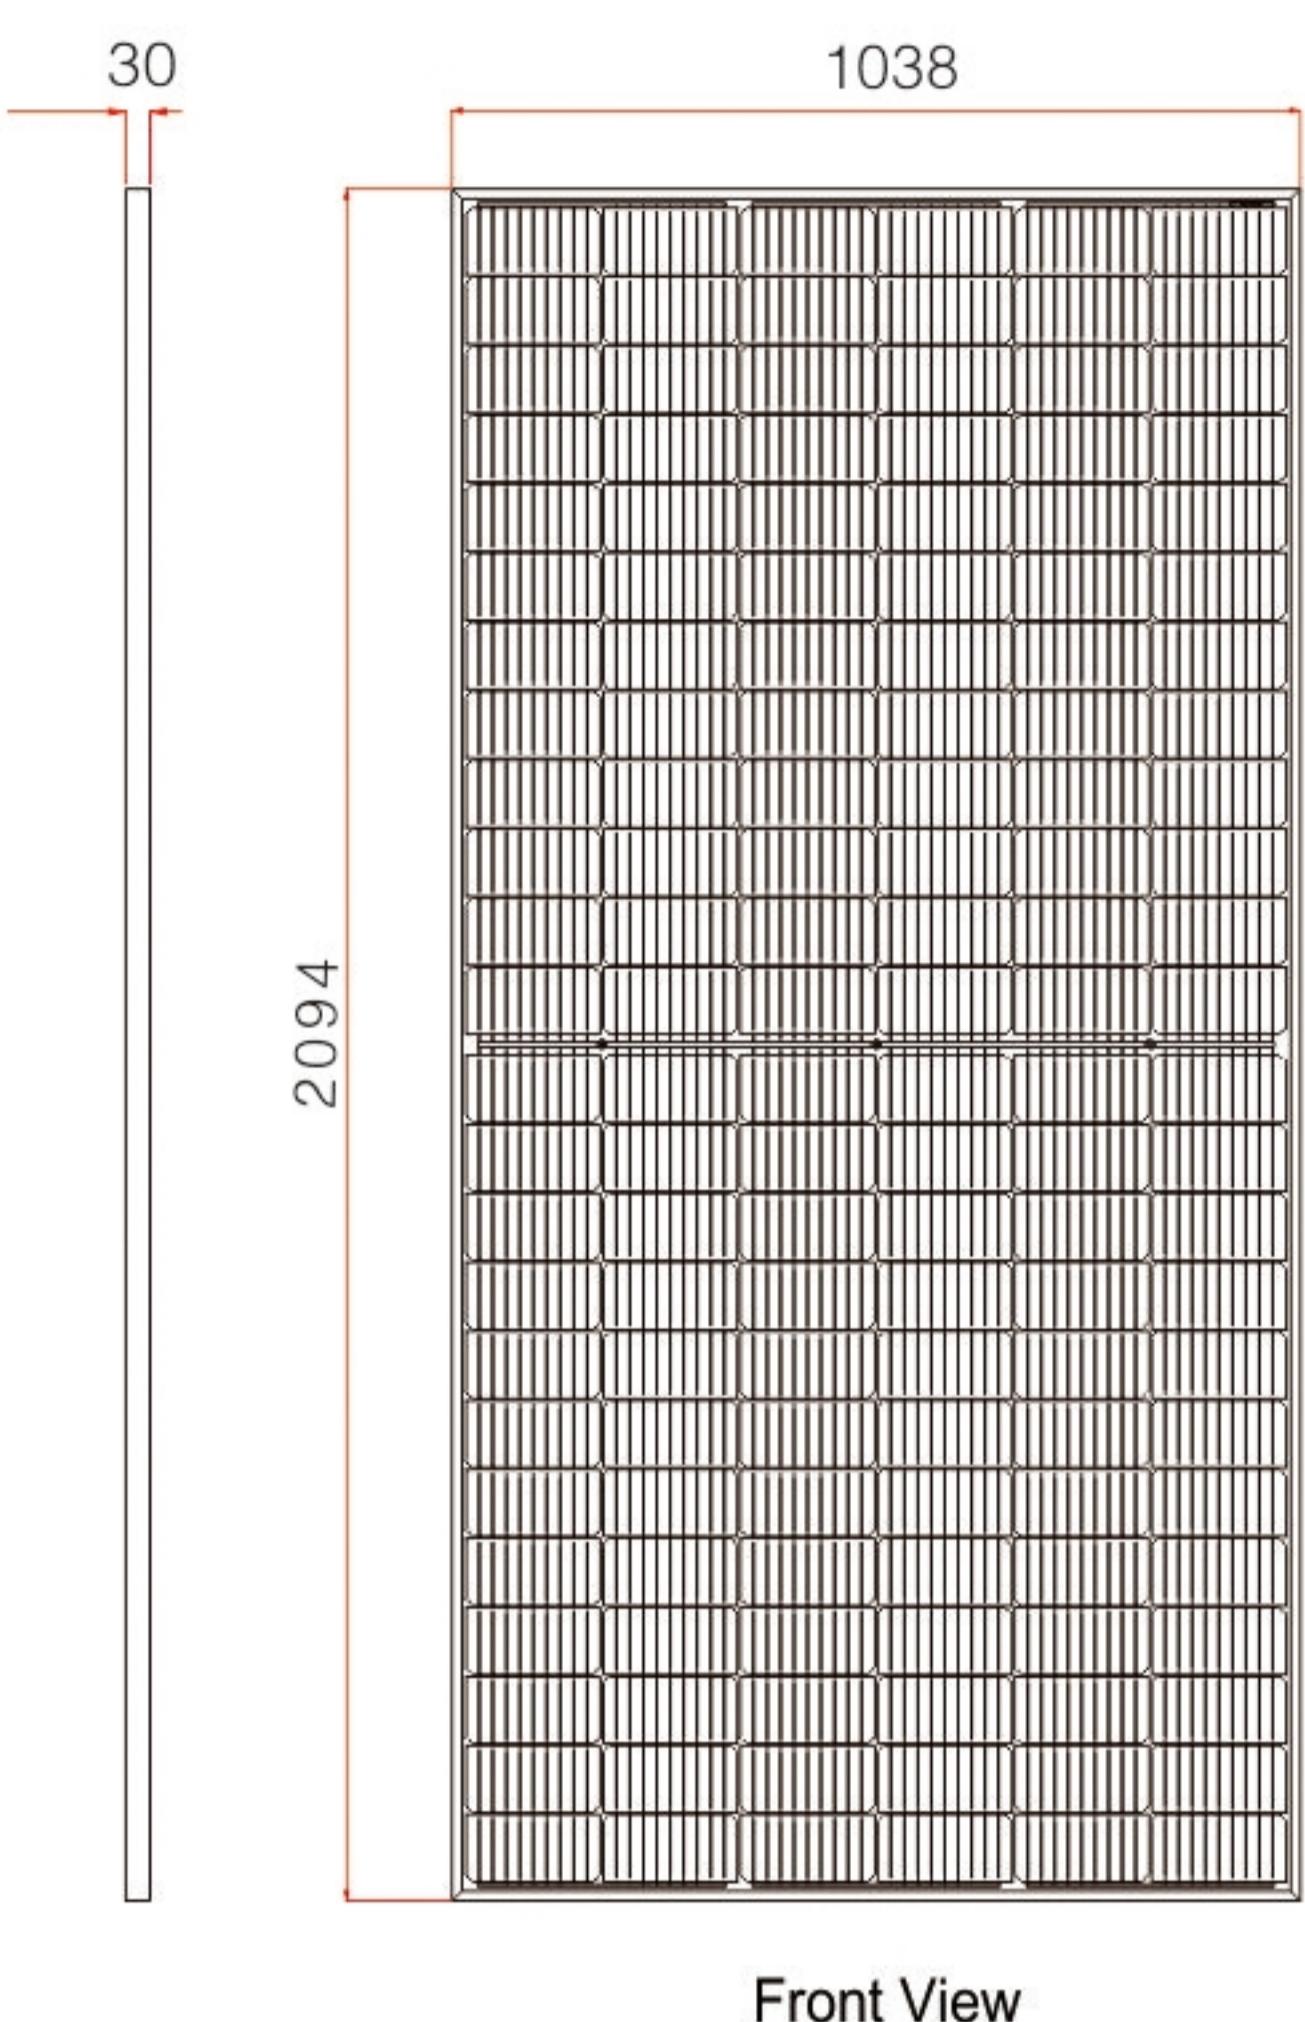

## ELECTRICAL DATA (STC)


Peak Power Watts-P <sub>MAX</sub> (W <sub>p</sub> )	430	435	440	445	450
Power Output Tolerance-P <sub>MAX</sub> (W)			0~+5		
Maximum Power Voltage-V <sub>MPP</sub> (V)	40.5	40.8	41.1	41.4	41.7
Maximum Power Current-I <sub>MPP</sub> (A)	10.62	10.67	10.71	10.75	10.80
Open Circuit Voltage-V <sub>OC</sub> (V)	48.7	48.9	49.1	49.3	49.5
Short Circuit Current-I <sub>SC</sub> (A)	11.20	11.24	11.28	11.32	11.36
Module Efficiency η <sup>m</sup> (%)	19.8	20.0	20.2	20.5	20.7

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.

## ELECTRICAL PARAMETERS AND DIFFERENT POWER GAIN BACK (Take 10% irradiation ratio as an example)

Maximum Power-P <sub>MAX</sub> (W <sub>p</sub> )	457	479	500	522	544
Maximum Power Voltage-V <sub>MPP</sub> (V)	40.8	40.8	40.8	40.8	40.8
Maximum Power Current-I <sub>MPP</sub> (A)	11.20	11.74	12.27	12.80	13.34
Open Circuit Voltage-V <sub>OC</sub> (V)	49.0	49.1	49.2	49.3	49.4
Short Circuit Current-I <sub>SC</sub> (A)	11.80	12.36	12.93	13.49	14.05

Back gain: Under standard test conditions, the additional gain from the back and the front power depends on the installation and ground albedo parameters.

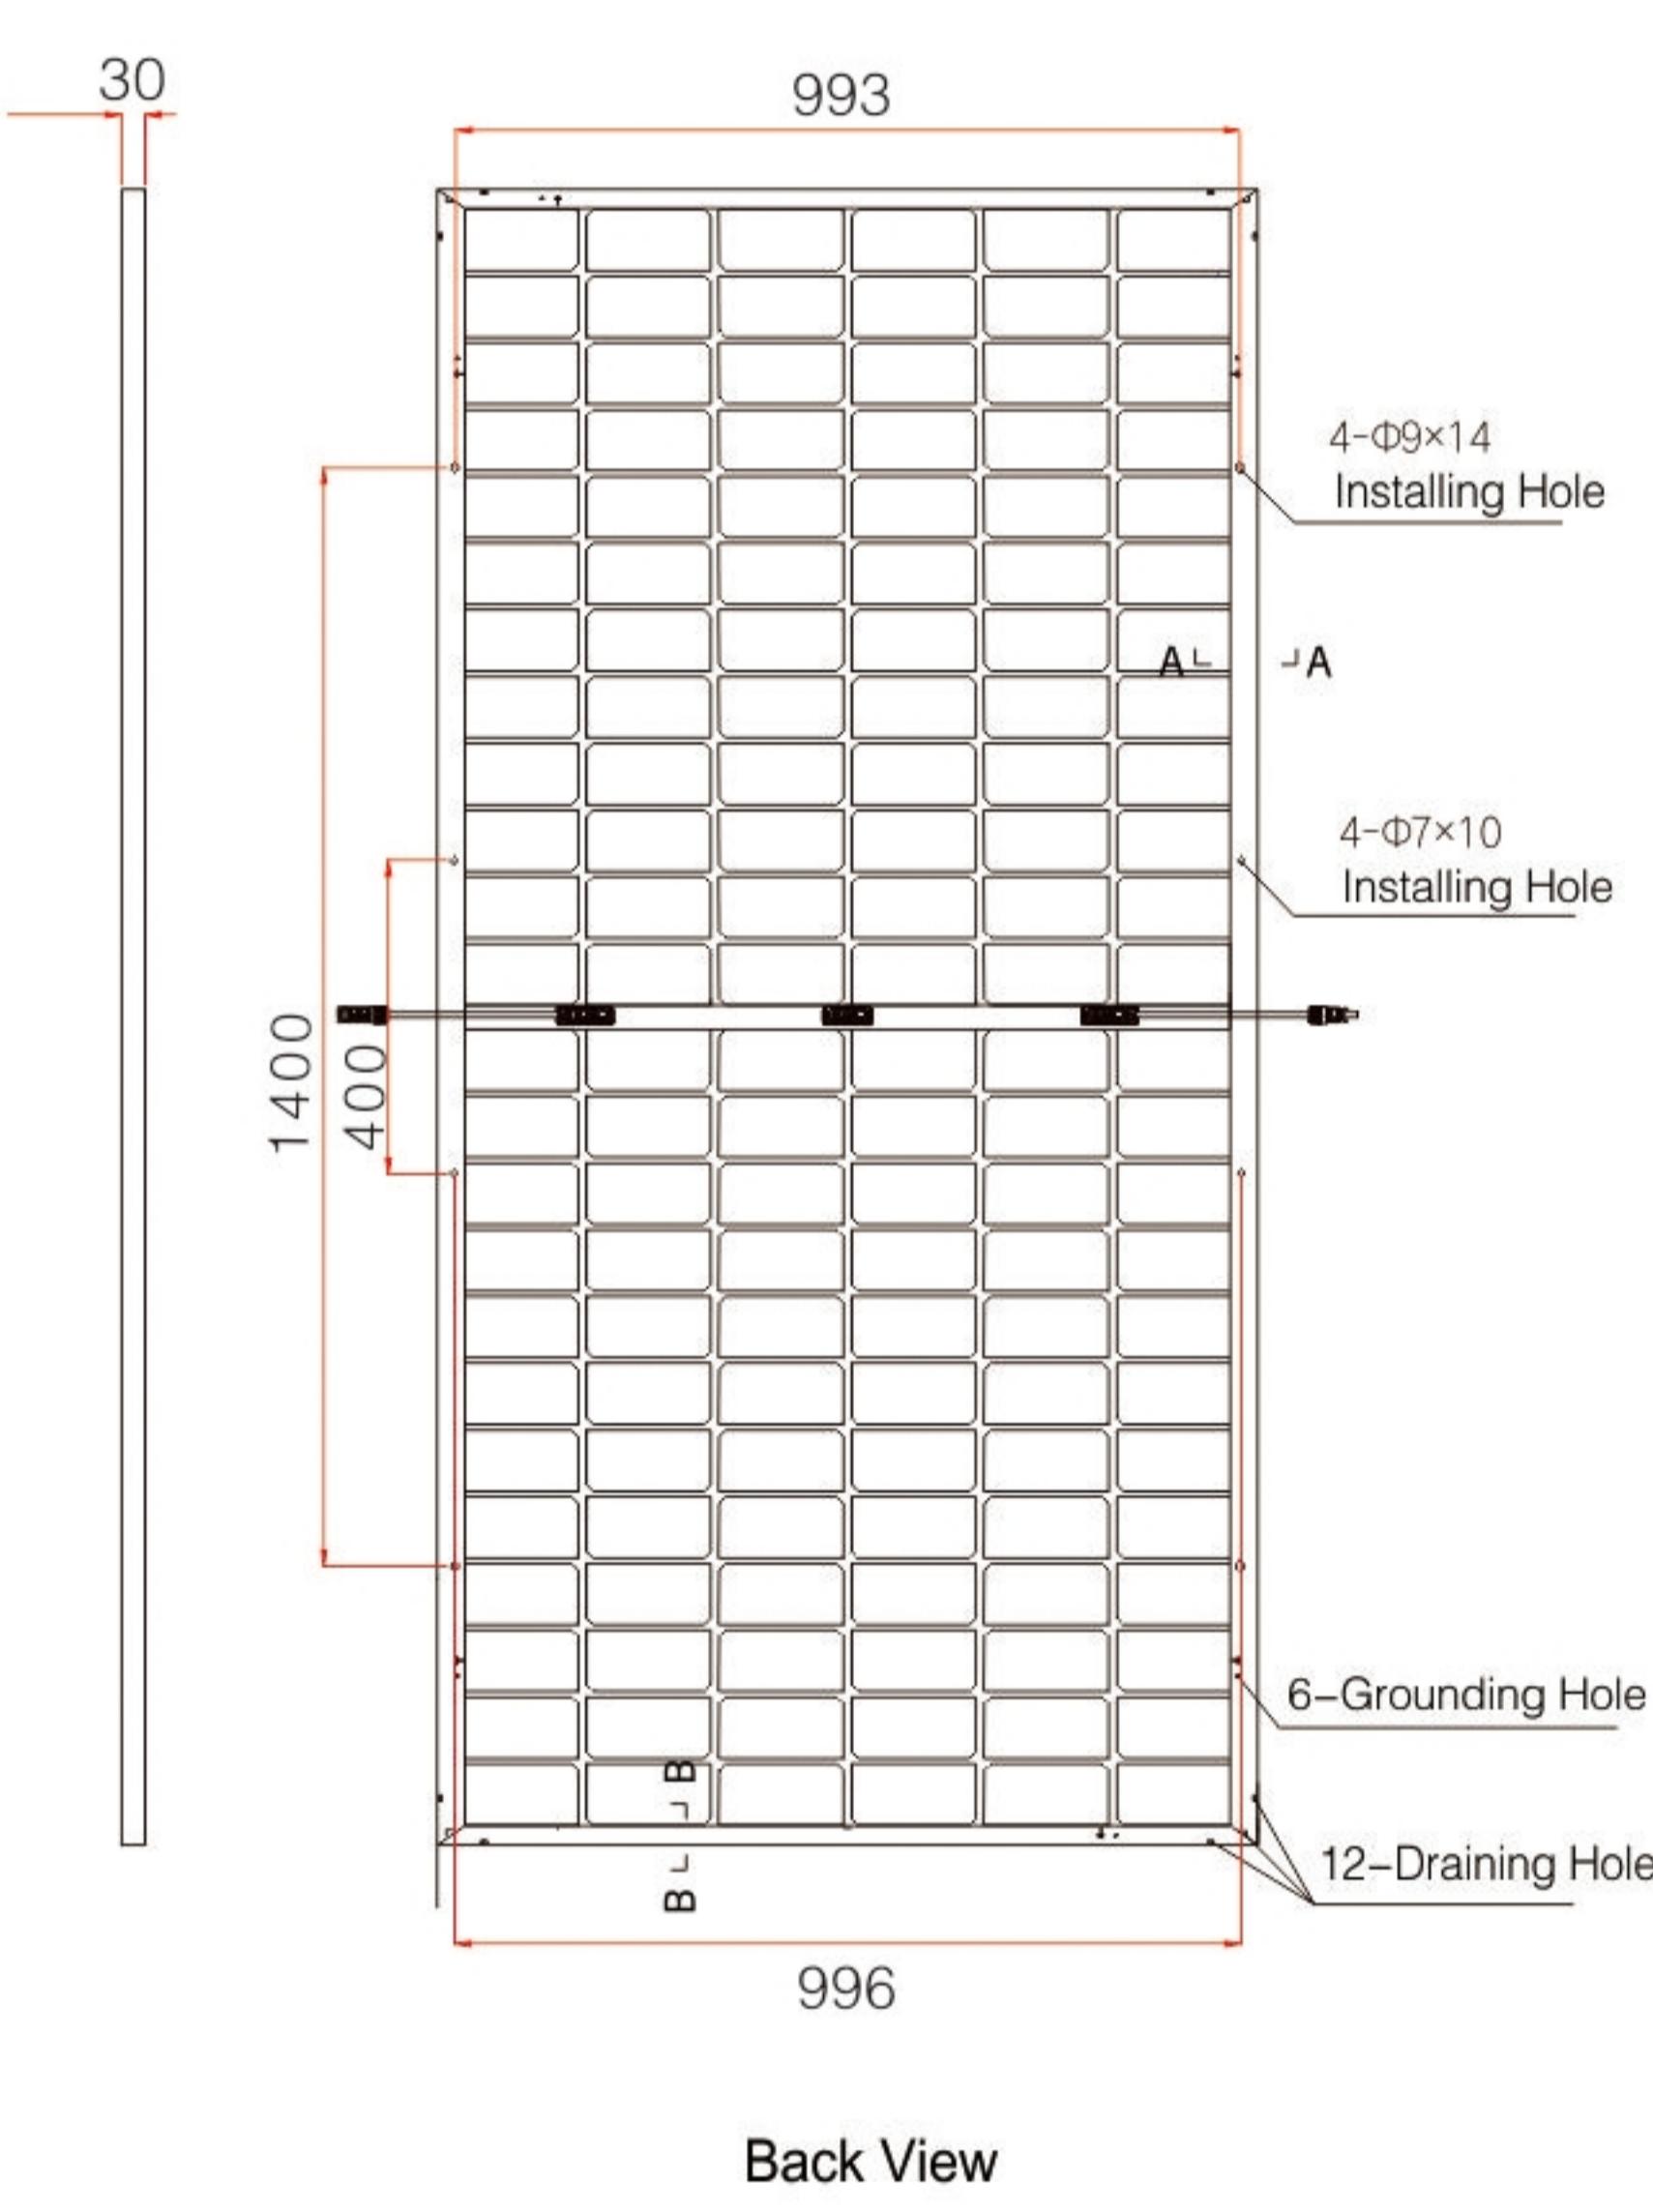

## ELECTRICAL DATA (NOCT)

Maximum Power-P <sub>MAX</sub> (W <sub>p</sub> )	325	329	333	337	341
Maximum Power Voltage-V <sub>MPP</sub> (V)	38.2	38.5	38.8	39.0	39.1
Maximum Power Current-I <sub>MPP</sub> (A)	8.51	8.55	8.58	8.63	8.71
Open Circuit Voltage-V <sub>OC</sub> (V)	46.0	46.2	46.4	46.6	46.7
Short Circuit Current-I <sub>SC</sub> (A)	9.02	9.05	9.08	9.12	9.15

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	144cell(6x24)
Module Dimensions	2094x1038x30mm( 82.44x40.87 x 1.18 inches)
Weight	27.5kg(60.62lb)
Front Glass	2.0mm(0.08inches), High Transmission,Tempered Coated Glass
Encapsulant Material	POE/EVA
Rear Glass	2.0mm(0.08inches) semi-tempered glass (white grid)
Frame	30mm (1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	4.0mm <sup>2</sup> 350mm photovoltaic special cable, or customized
Connector	MC4、QC4

## TEMPERATURE RATING

NOCT(Nominal Operating Cell Temperature)	41°C (± 3°C)
Temperature Coefficient of P <sub>MAX</sub>	- 0.35%/°C
Temperature Coefficient of V <sub>OC</sub>	- 0.25%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

## LIMIT PARAMETERS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

(DO NOT connect Fuse in Combiner Box with two or more strings in

## WARRANTY

15 year Product Workmanship Warranty

30 year Linear Power Warranty

## PACKAGING CONFIGURATION

Modules per box: 35 pieces

Modules per 40' container:770 pieces

