


REESUN120HB-166M-9BB 350-375W

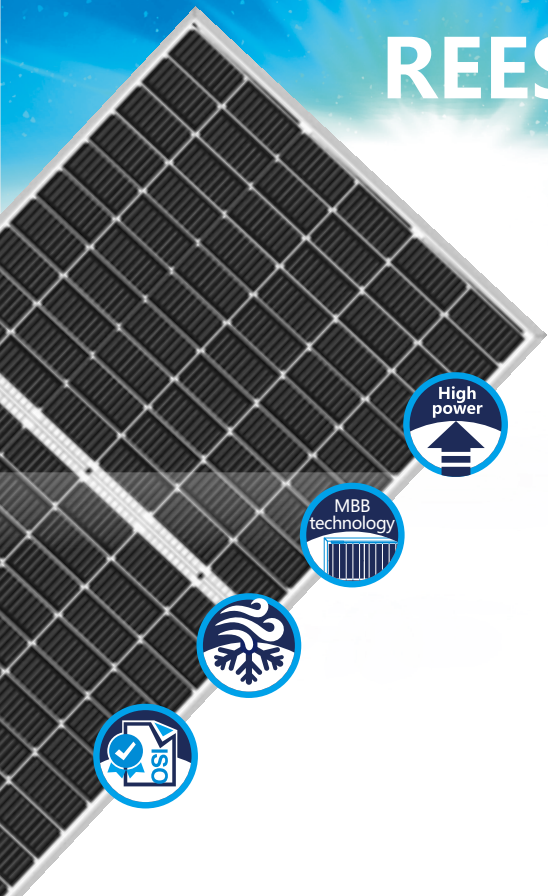

High Efficiency Low LID Mono PERC with Half-cut Technology

Positive power tolerance (0 ~ +5W) guaranteed

High module conversion efficiency (up to 20.59%)

Slower power degradation enabled by Low LID Mono PERC technology:
first year <2.0%, 0.45% year 2-30

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Reduced resistive loss with lower operating current
Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current

Complete System and Product Certifications

IEC 61215, IEC 61730

ISO 9001:2015: ISO Quality Management System

ISO 14001:2015: ISO Environment Management System


ISO 45001:2018 Occupational Health and Safety



Jiangsu ReeSun Solar Co., Ltd. is a high-tech PV enterprise dedicated to research, development, production, sales & after sales service, mainly engaged in crystalline silicon solar cells, solar panels, photovoltaic systems, PV applications. Our product specifications are compatible with 158-210 size battery cells, adopting German TUV quality control standards, and realizing the whole process quality traceability from auxiliary materials to finished components.

* Specifications subject to technical changes and tests. ReeSun solar reserves the right of interpretation.

12-year Warranty for Materials and Processing; 25-year Warranty for Extra Linear Power Output.

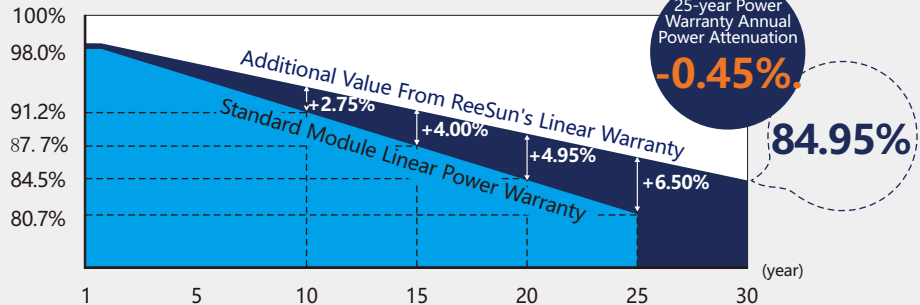

JIANGSU REESUN SOLAR CO.,LTD.

ADD: No.1 Nanjing Road, Jianhu Economic Development Area, Yancheng, Jiangsu, China. | 224799

TEL: +086 0515-86230222

Fax: +086 0515-86230333

Email: Daniel@rj-solar.cn

Web: <http://www.reesun-solar.com>

Electrical Characteristics

Model Number	
Testing Condition	
Maximum Power (Pmax/W)	
Voltage at Maximum Power (Vmp/V)	
Current at Maximum Power (Imp/A)	
Open Circuit Voltage (Voc/V)	
Short Circuit Current (Isc/A)	
Module Efficiency (%)	



Electrical Characteristics

Test uncertainty for Pmax: +3%

	350W	355W	360W	365W	370W	375W
STC	STC	STC	STC	STC	STC	STC
350	355	360	365	370	375	
33.34	33.62	33.90	34.18	34.46	34.73	
10.50	10.56	10.62	10.68	10.74	10.80	
40.10	40.40	40.70	41.00	41.30	41.60	
11.04	11.10	11.16	11.22	11.28	11.34	
19.21	19.49	19.76	20.04	20.31	20.59	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25°C, Spectra at AM1.5

Design (mm)

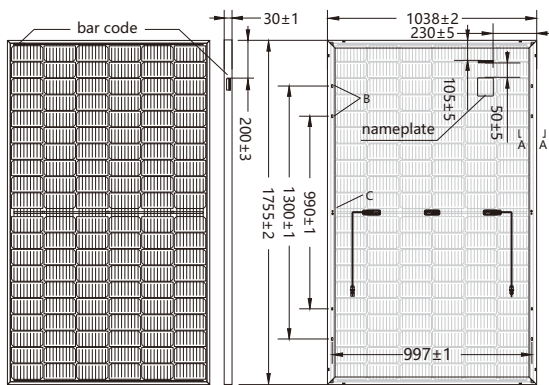

	Pmax/W	Voc/V	Isc/A	Vmp/V	Imp/A	Pmax gain
Electrical characteristics with different rear side power gain (referencee to 360W front)	379	40.70	11.72	34.00	11.15	5%
	397	40.70	12.28	34.00	11.68	10%
	414	40.80	12.83	33.90	12.21	15%
	432	40.80	13.39	33.90	12.74	20%
	450	40.80	13.95	33.90	13.28	25%

Mechanical Parameters

Operating Parameters

Cell Orientation: 120 (6x20)	Operational Temperature: -40°C ~ +85°C
Junction Box: IP68,three diodes	Power Output Tolerance: 0~+5 W
Output Cable: 4mm ² , 300mm in length, length can be customized	Maximum System Voltage: DC1500V (IEC/UL)
	Maximum Series Fuse Rating: 20A
Glass: Dual glass 2.0mm coated tempered glass	Voc and Isc Tolerance: ±3%
Frame: Anodized aluminum alloy frame	Nominal Operating Cell
Weight: 23.5kg	Temperature: 45±2°C
Dimension: 1755×1038×30mm	Safety Class: Class II
Packaging: 35pcs per pallet	Fire Rating: UL
	Bifaciality: Glazing 70±5%
	175pcs per 20'/GP
	805pcs per 40'/HC




Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.284%/°C
Temperature Coefficient of Pmax	-0.350%/°C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

I-V Curve (REESUN120HB-166M-360W)

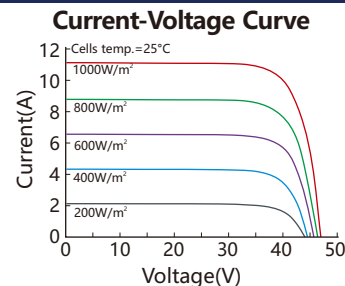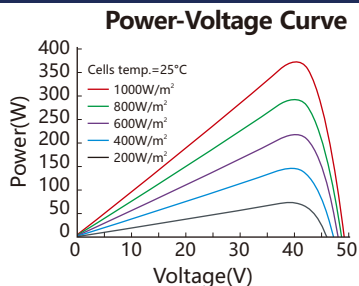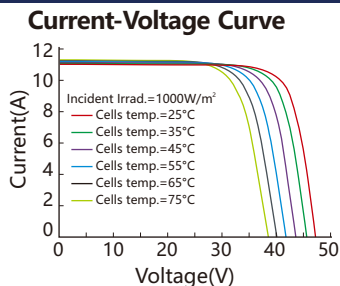

JIANGSU REESUN SOLAR CO.,LTD.

ADD: No.1 Nanjing Road, Jianhu Economic Development Area, Yancheng, Jiangsu, China. | 224799

TEL: +086 0515-86230222

Fax: +086 0515-86230333

Email: Daniel@rj-solar.cn

Web: <http://www.reesun-solar.com>