

单晶60片双玻组件

Monocrystalline Double-glass Module (60 Cells)

300-320W

输出功率 / Output power

19.46%

最高效率 / Maximum efficiency

0~+5W

功率公差 / Power tolerance

全面的产品和体系证书

Comprehensive product certification and system certification

- IEC 61215 IEC 61730
- IEC TS 62804(抗PID/PID Resistant)
- IEC 62716(耐氨气/Ammonia Corrosion)
- IEC 61701(耐盐雾/Salt Spray Corrosion)
- IEC TS 62941(光伏质量体系/PV quality Management System)
- ISO9001:2015(质量管理体系/Quality Management System)
- ISO14001(环境管理体系/Environmental Management System)
- OHSAS18001(职业健康安全管理体系/Occupational Health and Safety Management System)





湖南红太阳新能源科技有限公司成立于2008年，由中电科电子装备集团有限公司全资控股，是中国电子科技集团有限公司（世界500强）的成员企业。公司在长沙、北京设有两个生产基地，具备1GW高效组件智能生产能力，是首批符合《光伏制造行业规范条件》的企业。单晶、多晶组件均获“领跑者”一级认证。

Hunan Red Solar New Energy Science and Technology Co., Ltd., established in 2008 and wholly-owned by CETC Electronics Equipment Group Co., Ltd. member of China Electronics Technology Group Co., Ltd. (Fortune Global 500). The company has two production bases in Changsha and Beijing, which have high-efficiency intelligent module production lines with annual production capacity of 1Gw. The company is the first batch of enterprises that meet the requirements of "Photovoltaic Manufacturing Industry Specification". The monocrystal and Polycrystal PV module are all certified as "top runner".




组件型号
Model of PV Module
CETC-xxxM(Gx)/60


功率范围
Power Range
300-320W

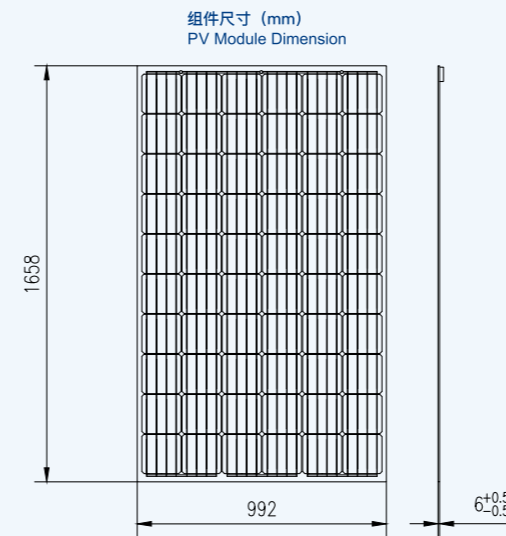

组件的I-V曲线
I-V Curves of PV Module

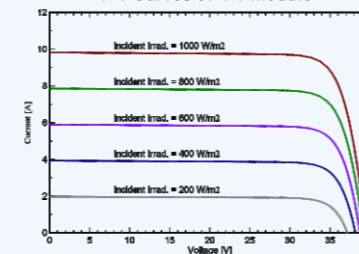


组件的P-V曲线
P-V Curves of PV Module

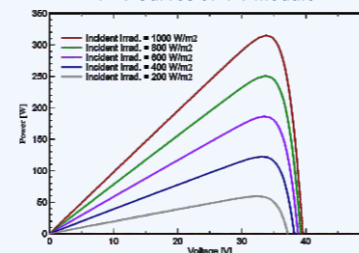

- 抗PID保证 / PID Resistant Guarantee**
严选的封装材料和无边框设计免除PID风险。
Strict selection of encapsulation materials and without frame design eliminates PID risk.
- 定制化 / Customization**
可满足客户定制化要求，提供不同透光率产品。
Can meet the customized requirements and provide products with different light transmittance.
- 高寿命 / Long Life**
30年线性质保，更低的年度衰减率，提升投资收益。
30-year linear warranty, lower power attenuation rate, increased return on investment.
- 自清洁 / Self Cleaning**
优异、可靠的玻璃镀膜技术，保证恶劣环境下稳定的功率输出。
Excellent and reliable glass coating technology to ensure stable power output in severe environment.

10年产品质保·30年线性功率保证

10 Year Product Warranty · 30 Year Linear Power Warranty

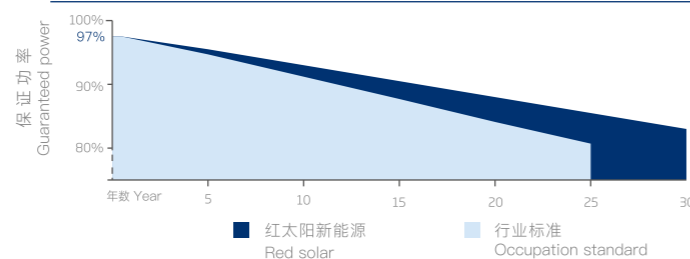

电气参数 (STC) / Electrical Parameter(STC)					
型号/Model	300M	305M	310M	315M	320M
最大功率/Maximum power	300	305	310	315	320
工作点电压/Working point voltage	32.10	32.24	32.44	32.64	32.84
工作点电流/Working point current	9.35	9.46	9.56	9.65	9.74
开路电压/Open circuit voltage	39.10	39.30	39.50	39.70	39.90
短路电流/Short circuit current	9.66	9.74	9.82	9.90	9.98
组件效率/PV module efficiency	18.24%	18.54%	18.85%	19.15%	19.46%
标准测试条件/Standard test conditions	大气质量AM1.5, 辐照度1000W/m², 电池温度25℃ Atmospheric quality Am1.5, Irradiance 1000w/m², Cell Temperature 25℃				

电气参数 (NMOT) / Electrical Parameters (NMOT)					
型号/Model	300M	305M	310M	315M	320M
最大功率/Maximum power	220.7	224.8	229.0	232.9	235.5
工作点电压/Working point voltage	30.1	30.3	30.6	30.8	30.8
工作点电流/Working point current	7.34	7.41	7.48	7.55	7.65
开路电压/Open circuit voltage	35.8	36.0	36.1	36.3	36.5
短路电流/Short circuit current	7.80	7.87	7.93	8.00	8.08
NMOT	辐照度800W/m², 环境温度20℃, 风速1m/s The irradiance is 800W/m², the ambient temperature is 20 degrees, and the wind speed is 1m/s				
在该产品目录中的电性能参数并不指一块组件，也不是合同中承诺的内容，只做不同类型组件间比较用。 The Electrical performance parameters are neither just referred to one PV panel, nor are a part of the contract; They are only used as reference.					

机械参数 / Mechanical Parameters	
组件尺寸 / Module size	1658*992*6mm
电池片数量 / Number of solar cells	60片 (6*10)
重量 / Weight	24Kg ±5%
接线盒 / Junction Box	IP67、兼容MC4
线缆 / Cables	4mm², 线长300mm (可定制 / Customizable)
前板玻璃 / Front plate glass	2.5mm, 超白, 减反射膜钢化玻璃 / 2.5mm,Ultra white&Minus reflection film semi-toughened glass
背板玻璃/Rear plate glass	2.5mm, 半钢化玻璃/2.5mm,semi-toughened glass
正面静态载荷 / Static load on the front	5400Pa
背面静态载荷 / Static load on the back	2400Pa

包装与运输 (Packaging&Transport)	
40尺集装箱运输 / 40'HQ container transport	33 Pcs/box × 24 box = 792 Pcs
17.5米车运输 / 17.5m truck transport	33 Pcs/box × 35 box = 1155 Pcs

温度参数 / Temperature Parameter		极限参数 / Maximum Ratings	
NMOT	45±2℃	工作温度 Working temperature	-40~+85℃
最大功率(Pmax)温度系数 Temperature coefficient of maximum power(Pmax)	-0.43%/℃	最大系统电压 Maximum system voltage	1500VDC
开路电压(Voc)温度系数 Temperature coefficient of open circuit voltage(Voc)	-0.34%/℃	最大保险丝额定电流 Maximum fuse rated current	15A
短路电流(Isc)温度系数 Temperature coefficient of short circuit voltage(Isc)	+0.049%/℃		

长沙基地 Changsha base
地址/Address: 湖南省长沙市天心区新开铺路1025号/1025, Xinkaipu Road, Tianxin District Changsha City, Hunan Province.
联系方式/Tel: +86 731 85380575 (国际/Abroad) +86 731 85401416 (国内/Domestic)

北京基地 Beijing base
地址/Address: 北京市通州区光机电一体化产业基地兴光二街6号/NO.6, Xingguang 2nd Street, Opto Mechatronics Industry Base Tongzhou District, Beijing City.
联系方式/Tel: +86 10 81504639 (国际/Abroad) +86 10 81504639 (国内/Domestic)