
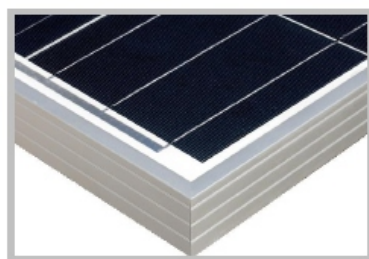


High Efficiency, High Quality PV Module

156' CELL POLY 200Wp

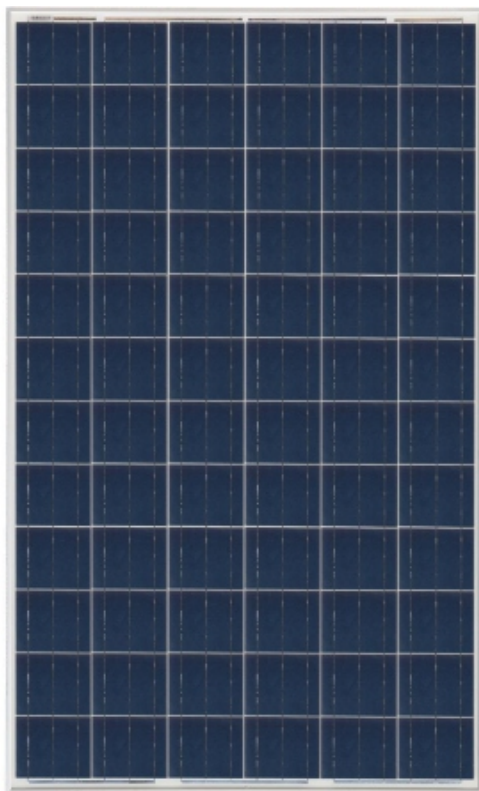

MODULE CHARACTERISTICS

- ◆ Solar Cell: High efficiency crystalline solar cell. Even if under the weak light, the solar module can produce maximum power output.
- ◆ Tempered glass: Anti-reflecting coating and high transmission rate glass increase the power output and mechanical strength of solar module.
- ◆ EVA and TPT: Using high quality EVA and TPT to prevent destroying and water.
- ◆ Al frame: Without screw, corner connection. 6 holes on the frame can be installed easily.
- ◆ Junction box: Multi function junction box with water proof and bypass diode, which protects the module from burning caused by hot-spot effect because of shading
- ◆ High reliability with guaranteed $\pm 3\%$ power output tolerance, ensuring return on investment
- ◆ Withstands high wind-pressure and snow load (passed IEC 5400Pa mechanical loading test), and extreme temperature variations. Resisting moisture and etching effectively, not effect by geology.
- ◆ Rigorous quality control meeting the highest international standards ISO 9001:2000 (Quality Management System) and ISO 14001:2004 (Environmental Management System) certified factories manufacturing world class products.
- ◆ 5-year product quality guarantee and 25-year power output transferable guarantee. Long lifetime: ≥ 25 years; Less power decrease.

ELECTRICAL PARAMETERS

Model No.	BL-SP200
Maximum Power at STC (Pmax)	200 Wp
Open Circuit Voltage (Voc)	43.50 V
Short Circuit Current (Isc)	6.56 A
Optimum Operating Voltage (Vmp)	36.22 V
Optimum Operating Current (Imp)	5.52 A
Module Efficiency	15.30 %
Power Tolerance	± 3 %
Operating Temperature	-40°C to +85°C
Maximum System Voltage	1000V DC


MECHANICAL PARAMETERS

Cell Type	Poly-crystalline silicon 156x123mm
No. of Cells and Connection	72 (6x12)
Dimensions of Module	1320x992x35mm
Weight	14.5 kg
Area	1.30 m ²
Cable & Connector Type	4mm ² x900mm with MC4
Junction Box Type	IP 68 Pass TUV
Front Glass	3.2mm tempered glass
Frame	Anodized Aluminium Alloy
Max.Series Fuse Rating	15A
Surface Max.Load Capacity	2400-4500 Pa
Max. Hail Load	23m/s, 7.53g
Standard Test Condition	AM1.5 1000W/m ² 25 ±2°C


TEMPERATURE COEFFICIENTS

NOCT	47±2°C
Peak Power Tk(Wp)	-0.47 %/°C
Open Circuit Voltage Tk(Voc)	-0.35 %/°C
Short Circuit Current Tk(Isc)	0.04 %/°C

MECHANICAL DIMENSIONS

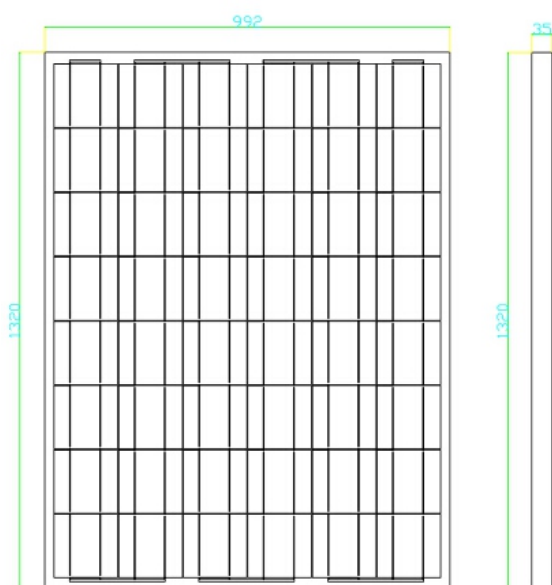

I-V CURVE

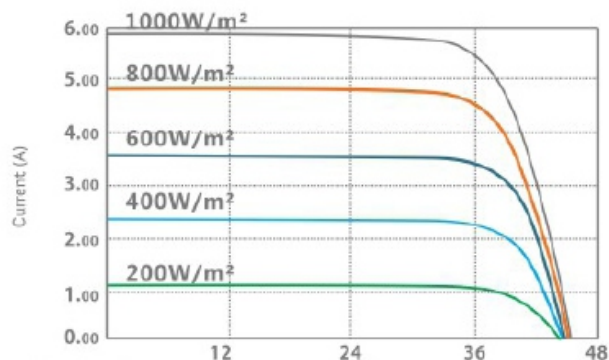

PRODUCT GARANTEE

Product Quality	5 years
Power Output	Not less than 90% in 10 years Not less than 80% in 25 years
Certicate	ISO9001, IEC61215&61730, CE

PACKING AND LOADING

Packing Way	Carton or Wooden box
1*20' Container	336pcs
1*40GP Container	784pcs