




mounting
systems

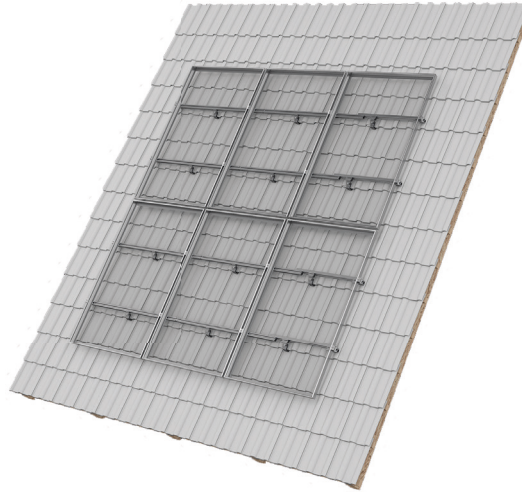

Pitched ProLine

Application	On-Roof
Roof cladding	Suitable for most types of roof cladding
Roof slope	Up to 60°
Building height	Up to 20m
PV modules	Framed, frameless
Module orientation	Portrait, landscape
Distance between roof fixing points	Up to 2m standard (further distance possible on request)
Supporting profiles	Extruded aluminium (EN AW 6063 T66)
Hooks, small parts	Stainless steel (V2A), Aluminium
Color	Aluminium: plate finish; Visible components available in black
Certificates	MCS 010, MCS 012 CE Marked – EN 1090-2/3
Warranty	10 Years



On-Roof



Framed Module



Frameless Module



Orientation
Portrait



Orientation
Landscape



Double
Roman Tiles



Slate



Plain Tiles



Corrugated



Bitumen Shingels



Standing Seam



Double Roman Tiles



Standing Seam



Plain Tiles



Corrugated

