



Half-Cell SERIES

HTM330~350PH-72

Half-Cell Polycrystalline Silicon PV Modules



HIGH OUTPUT POWER

Output power is higher than the same type of conventional polycrystalline modules



ANTI-PID CHARACTERISTICS

Ensure large-scale production of half-cell polycrystalline modules pass PID test



HOT-SPOT EFFECT

Excellent hot-spot immunity, can effectively avoid the power loss caused by shadow coverage, significantly extend life span



LOAD CAPACITY

Certified to withstand: wind load(2400 Pascal)and snow load(5400 Pascal)




HARSH ENVIRONMENT ADAPTATION

High salt mist and ammonia resistance certified by TUV

LINEAR PERFORMANCE WARRANTY

12-year product warranty / 25-year linear power warranty

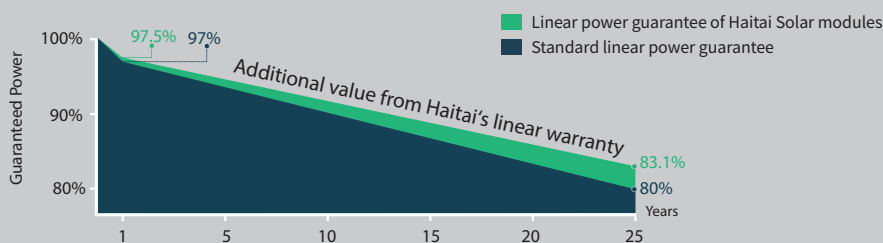

Mechanical Data

Cell Type	156.75×78.375mm Poly
Cell Orientation	144(6×24)
Module Dimensions	1997×992×35mm
Weight	22.0kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 300 mm negative pole: 400 mm wire length can be customized
Connector	MC4 compatible connector

HTM330~350PH-72

Half-Cell Polycrystalline Silicon PV Modules

Electrical Data (STC)

Maximum Power (Pmax/W)	330	335	340	345	350
Open Circuit Voltage (Voc/V)	45.95	46.30	46.65	47.00	47.35
Short Circuit Current (Isc/A)	9.21	9.28	9.35	9.42	9.49
Voltage at Maximum Power (Vmp/V)	37.89	38.16	38.42	38.68	38.94
Current at Maximum Power (Imp/A)	8.71	8.78	8.85	8.92	8.99
Module Efficiency (%)	16.66	16.91	17.16	17.42	17.67



Electrical Data (NMOT)

Maximum Power (Pmax/W)	244	248	252	256	260
Open Circuit Voltage (Voc/V)	43.55	43.96	44.36	44.78	45.18
Short Circuit Current (Isc/A)	7.32	7.37	7.42	7.47	7.52
Voltage at Maximum Power (Vmp/V)	35.68	36.01	36.32	36.63	36.97
Current at Maximum Power (Imp/A)	6.84	6.89	6.94	6.99	7.04

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25°C, AM1.5

NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.

I-V Curve



Temperature Coefficients

Temperature Coefficient (Pm)	-0.370%/°C
Temperature Coefficient (Voc)	-0.290%/°C
Temperature Coefficient (Isc)	0.050%/°C


Operating Parameters

Maximum System Voltage	1000/1500V
Operating Temperature	-40°C ~+85°C
NMOT (Nominal Module Operating Temperature)	41±3°C

Packaging

Modules Per Pallet: 31+31pcs/31+31+4 pcs
 Modules Per 40'HQ Container: 682pcs/726 pcs

Module Dimensions (mm)

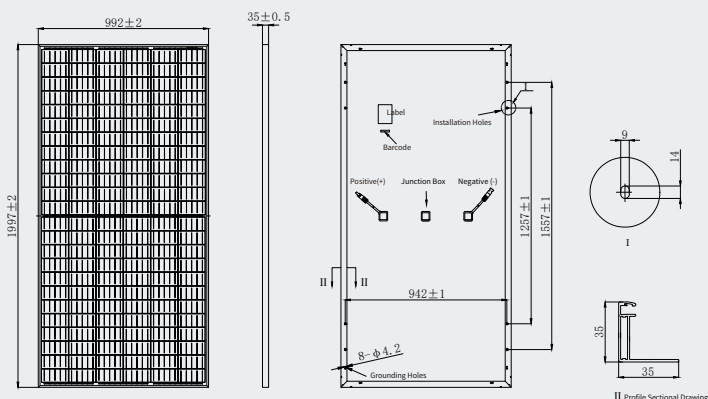

*Due to continuous innovation, R & D and product improvement, Haitai Solar has the right to adjust the specs on this datasheet at any time without prior notice.



Tangshan Haitai New Energy Technology Co., Ltd.
 Add: No.88, Haomen Road, Yutian County, Tangshan City, Hebei Province, China
 Tel: +86-315-5051826 E-mail: ht@htsolargroup.com
 Web: www.haitai-solar.com