



# Monocrystalline 158.75(5BB) Solar Module

## 72 Cells Series

## RD375M3~RD395M3 Output Power

## Max system voltage 1500V standard



### Key Features

- Outstanding Performance in weak-light conditions
- Excellent temperature coefficient
- 0~+5W positive tolerance guarantee reliable power output
- Shortened current collection, path, low series resistance
- More uniform stress distribution, higher anti-crack ability
- Excellent anti-PID module design
- Certified to withstand high wind loads(3600pa) and snow loads(8000pa) of the latest standard test of module mechanical load
- Salt mist and ammonia corrosion resistant

### Quality & Environment Certification System

ISO 9001:2015 Quality management systems

ISO 14001:2015 Environment management systems


OHSAS 18001:2007 Occupational health and safety management systems



IEC61215    IEC61730    UL1703    IEC61701    IEC62716

### Linear Warranty For Module

- 12 12-year materials and workmanship Warranty
- 25 25-year linear performance Warranty

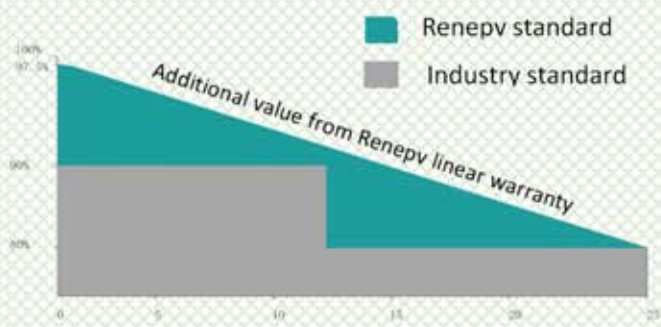

NINGBO RENELED NEW ENERGY CO.,LTD  
 Add:NO.35 jintong road,binhai industrial park,xiangshan,ningbo city,china  
 Tell: +86-574-65786319      Fax: +86-574-65786317  
 Email: [info@renepv.com](mailto:info@renepv.com)      Website: [www.renepv.com](http://www.renepv.com)



Edition 2020



# Monocrystalline 158.75(5BB) Solar Module

## Electrical Data (STC)

Module Type	RD375M3~RD395M3				
Power output(W)	375	380	385	390	395
Module efficiency(%)	18.91	19.16	19.41	19.68	19.92
Voltage at Pmax(V)	39.89	40.08	40.18	40.28	40.38
Current at Pmax(A)	9.40	9.50	9.68	9.73	9.78
Open circuit voltage(V)	48.15	48.30	48.37	48.43	48.53
Short circuit current(A)	9.85	9.95	10.05	10.15	10.21

STC: 1000W/m<sup>2</sup> irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. Average relative efficiency reduction of 5% at 200W/m<sup>2</sup> according to EN

## Electrical Data (NOCT)

Module Type	RD375M3~RD395M3				
Power output(W)	277.5	281.2	284.9	288.6	292.3
Voltage at Pmax(V)	36.43	36.60	36.70	36.79	36.88
Current at Pmax(A)	7.62	7.68	7.76	7.84	7.93
Open circuit voltage(V)	43.98	44.11	44.18	44.23	44.32
Short circuit current(A)	7.89	7.97	8.06	8.16	8.24

NOCT: open-circuit module operation temperature at 800W/m<sup>2</sup> irradiance, 20°C ambient temperature, 1m/s wind

## Mechanical Data

Cell (quantity)	MONO158.75 72pcs(6×12)
Sealing material	EVA
Back sheet	White sheet
Front Cover (material / thickness)	low-iron tempered glass / 3.2mm
Frame material	anodized aluminum alloy
Junction box (protection degree)	≥ IP67 with bypass-diode
Cable (length / cross sectional area)	900MM-Section4.0mm <sup>2</sup> /TUV
Plug connector(type/protection degree)	MC4 / IP67
Fire Safety Classification (IEC 61730)	Class C


## Working Conditions & Temperature

Nominal operating cell temperature	NOCT	44°C±2°C
Temperature coefficient of P <sub>max</sub>	δ[%/°C]	-0.385
Temperature coefficient of V <sub>OC</sub>	β[%/°C]	-0.304
Temperature coefficient of I <sub>SC</sub>	α[%/°C]	0.046
Maximum system voltage (IEC)	VDC	1500
Maximum series fuse rating	A	20
Operating & Storage temperature	°C	-40~+85



## Dimensions of PV Module(mm)

Module Dimension	1979×1002×40 mm
Weight	23.0kg

Unit:MM

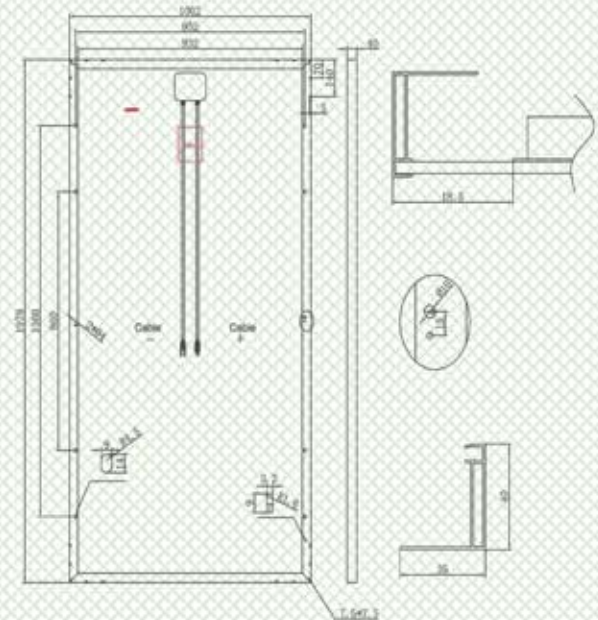

## IV-Curves

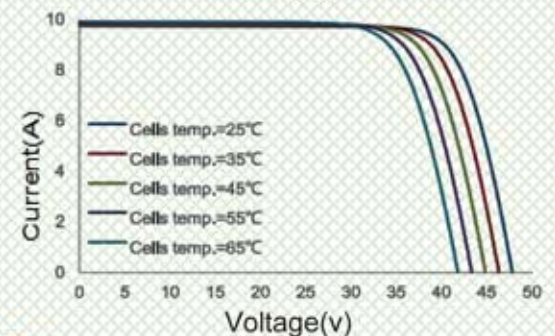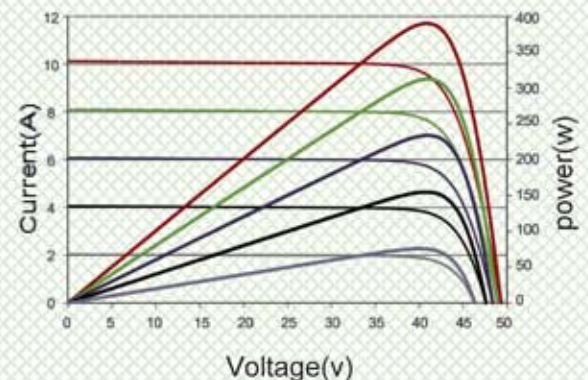

## Packing

packing unit	27pcs/box
1*40'HQ	22Pallets/594pcs