



Solar PV Modules

Monocrystalline PERC Solar PV Modules 350-380W



Higher Efficiency



Easy Handling & Installation



Maximum System Voltage of 1500V DC



Higher Module Power Output




BOS Cost Reduced



15 Years Product Workmanship Warranty



27 Years Product Performance Warranty

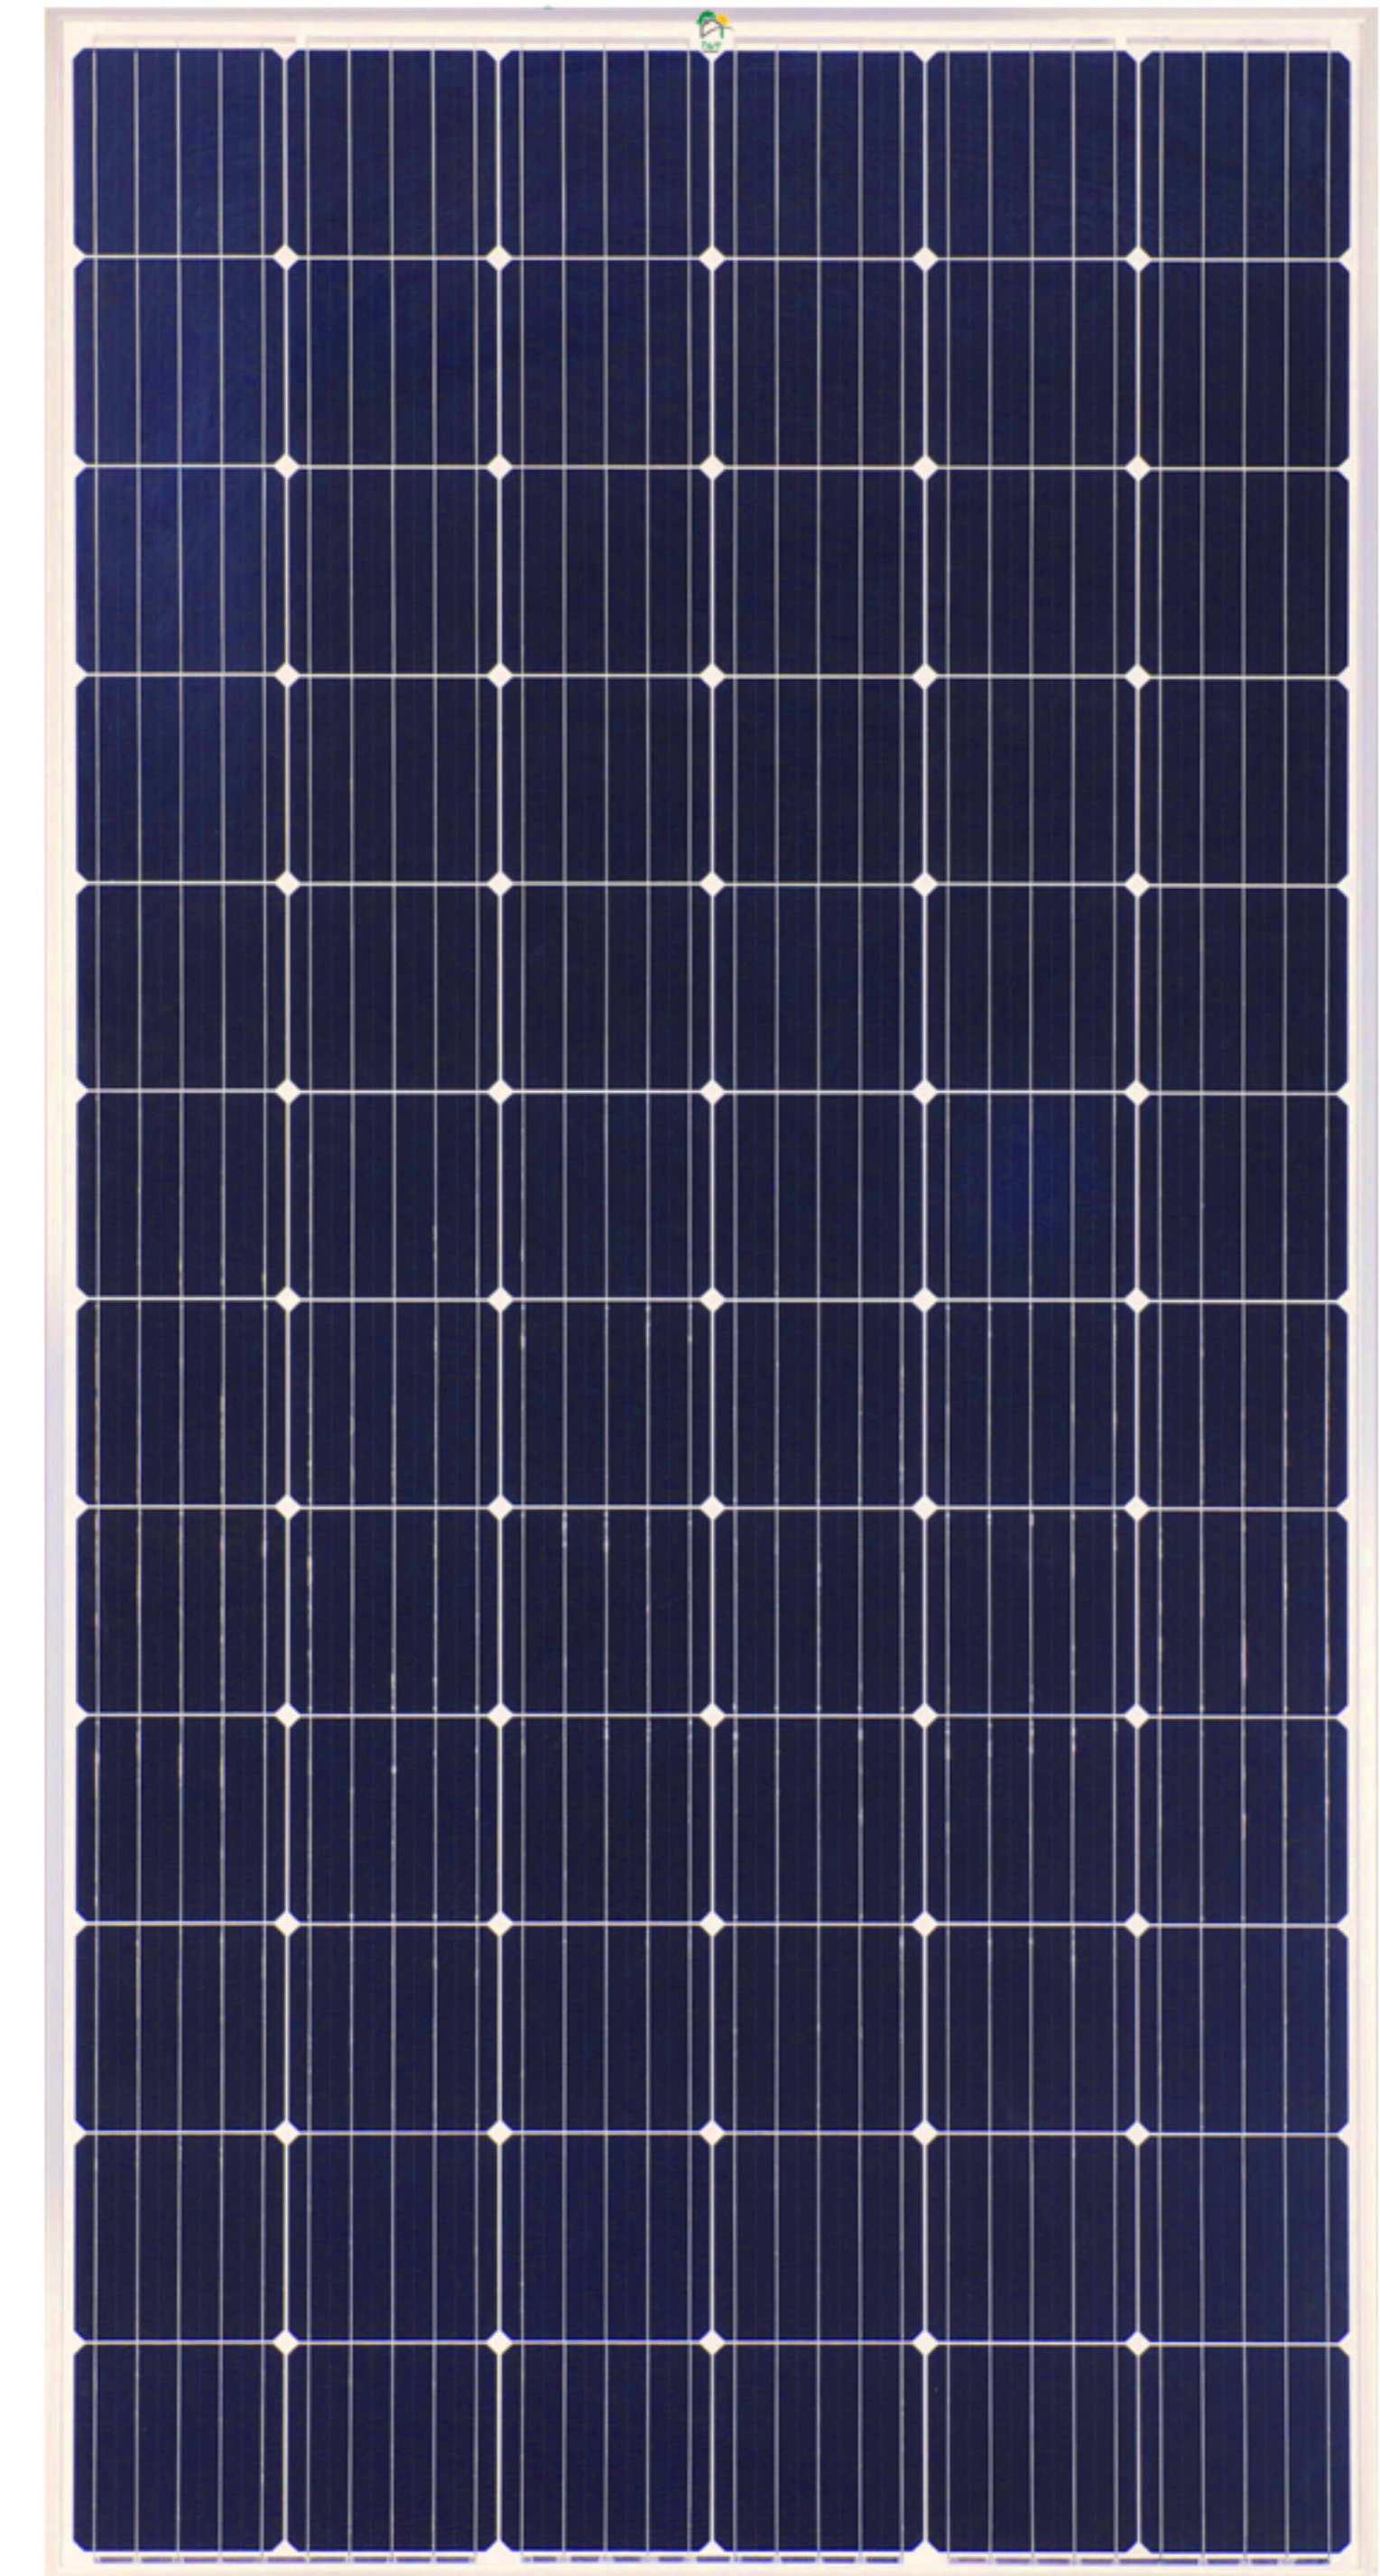

Why PHOTON Solar ?

Stringent Quality Control

Intensive R&D

Highly Skilled Management

Tier-1 Raw Material Used

Highest Standards of Product

Door-to-Door Supply Chain & Logistic

Product Reliability Factor



Positive Power Tolerance



Withstand Harsh Environmental Conditions



100% EL Inspected-Micro Crack Free Module



High Low Light Performance



High Resistivity AR Coated Glass



PID Resistant 5/6 BB Cells & Encapsulants

Applications



On-Grid Rooftop Industrial & Commercial System



Off-Grid Rooftop System



Solar Water Pumping



Off-Grid System For Filling Stations



Electric Vehicles Charging Station



On-Grid Large Scale Utility Projects



TECHNICAL DATA



Module Series	PHOTONM072F24V350	PHOTONM072F24V355	PHOTONM072F24V360	PHOTONM072F24V365	PHOTONM072F24V370	PHOTONM072F24V375	PHOTONM072F24V380
Dimension-LxW (MM)	1960*990	1960*990	1960*990	1960*990	1960*990	1960*990	1960*990
Cell Size (MM)	157*157	157*157	157*157	157*157	157*157	157*157	157*157
No of Cell	72	72	72	72	72	72	72
Max Series Fuse Rating	20A	20A	20A	20A	20A	20A	20A
Maximum System Voltage (V)	1000/1500	1000/1500	1000/1500	1000/1500	1000/1500	1000/1500	1000/1500

Electrical Characteristics at STC

Maximum Power Pmax (Wp)	350.00	355.00	360.00	365.00	370.00	375.00	380.00
Maximum Voltage Vmpp (V)	39.20	39.70	39.90	40.10	40.30	40.50	40.70
Maximum Current Impp (A)	8.96	8.94	9.02	9.10	9.18	9.34	9.42
Open circuit Voltage Voc (V)	47.60	47.80	48.10	48.40	48.70	49.10	49.30
Short Circuit Current Isc (A)	9.30	9.40	9.48	9.56	9.63	9.70	9.77
FF	0.79	0.79	0.79	0.79	0.79	0.79	0.80
Module Efficiency(%)	18.10	18.29	18.55	18.81	19.07	19.49	19.76

STC:1000W/m² irradiance, 25°C cell temperature, AM1.5G spectrum according to EN 60904-3

2 Average relative efficiency reduction of <5% for every 200W/m reduction in Irradiance, according to EN 60904-1

Electrical Characteristics at NOCT

Maximum Power Pmax (Wp)	254.18	258.84	267.40	271.10	274.80	278.50	282.20
Maximum Voltage Vmpp (V)	35.80	36.10	36.90	37.20	37.30	37.50	37.70
Maximum Current Impp (A)	7.12	7.17	7.24	7.29	7.36	7.42	7.49
Open circuit Voltage Voc (V)	44.06	44.80	45.30	45.50	45.70	45.90	46.10
Short Circuit Current Isc (A)	7.35	7.48	7.63	7.70	7.78	7.84	8.92


NOCT:800W/m² irradiance, 20°C ambient temperature, Wind Speed 1m/sec

Temperature Coefficients (Tc) Permissible Operating Conditions

Tc of Open Circuit Voltage (α)	-0.286%/°C ± 0.02
Tc of Short Circuit Current (β)	0.057%/°C ± 0.01
Tc of Power (γ)	-0.37%/°C ± 0.02
NOCT	46 ± 2°C
Temperature Range	-40°C to +85 °C
Limiting Reverse Current (Ir)	20A


Mechanical Data

Junction Box	IP 67/IP 68 rated with 3 Bypass diodes
Cable & Connectors	Solar cable 1000mm x 2 nos black MC4/MC4 Compatible connectors
Application Class	Class A (Safety class II)
Substrate (Glass)	High transmission low iron tempered glass
Solar cells & Orientation	Mono PERC Solar Cells
Cells Encapsulant	EVA (Ethylene Vinyl Acetate)- FC/UFC
Back Sheet	Composite film - White
Frame	Silver Anodized aluminum frame with twin wall profile
Mechanical Load Test	Sustain Heavy wind & snow loads (2400 Pa & 5400 Pa or 550 Kg/m ² Maximum diameter of 24 mm with Hail impact of 83 Km/h

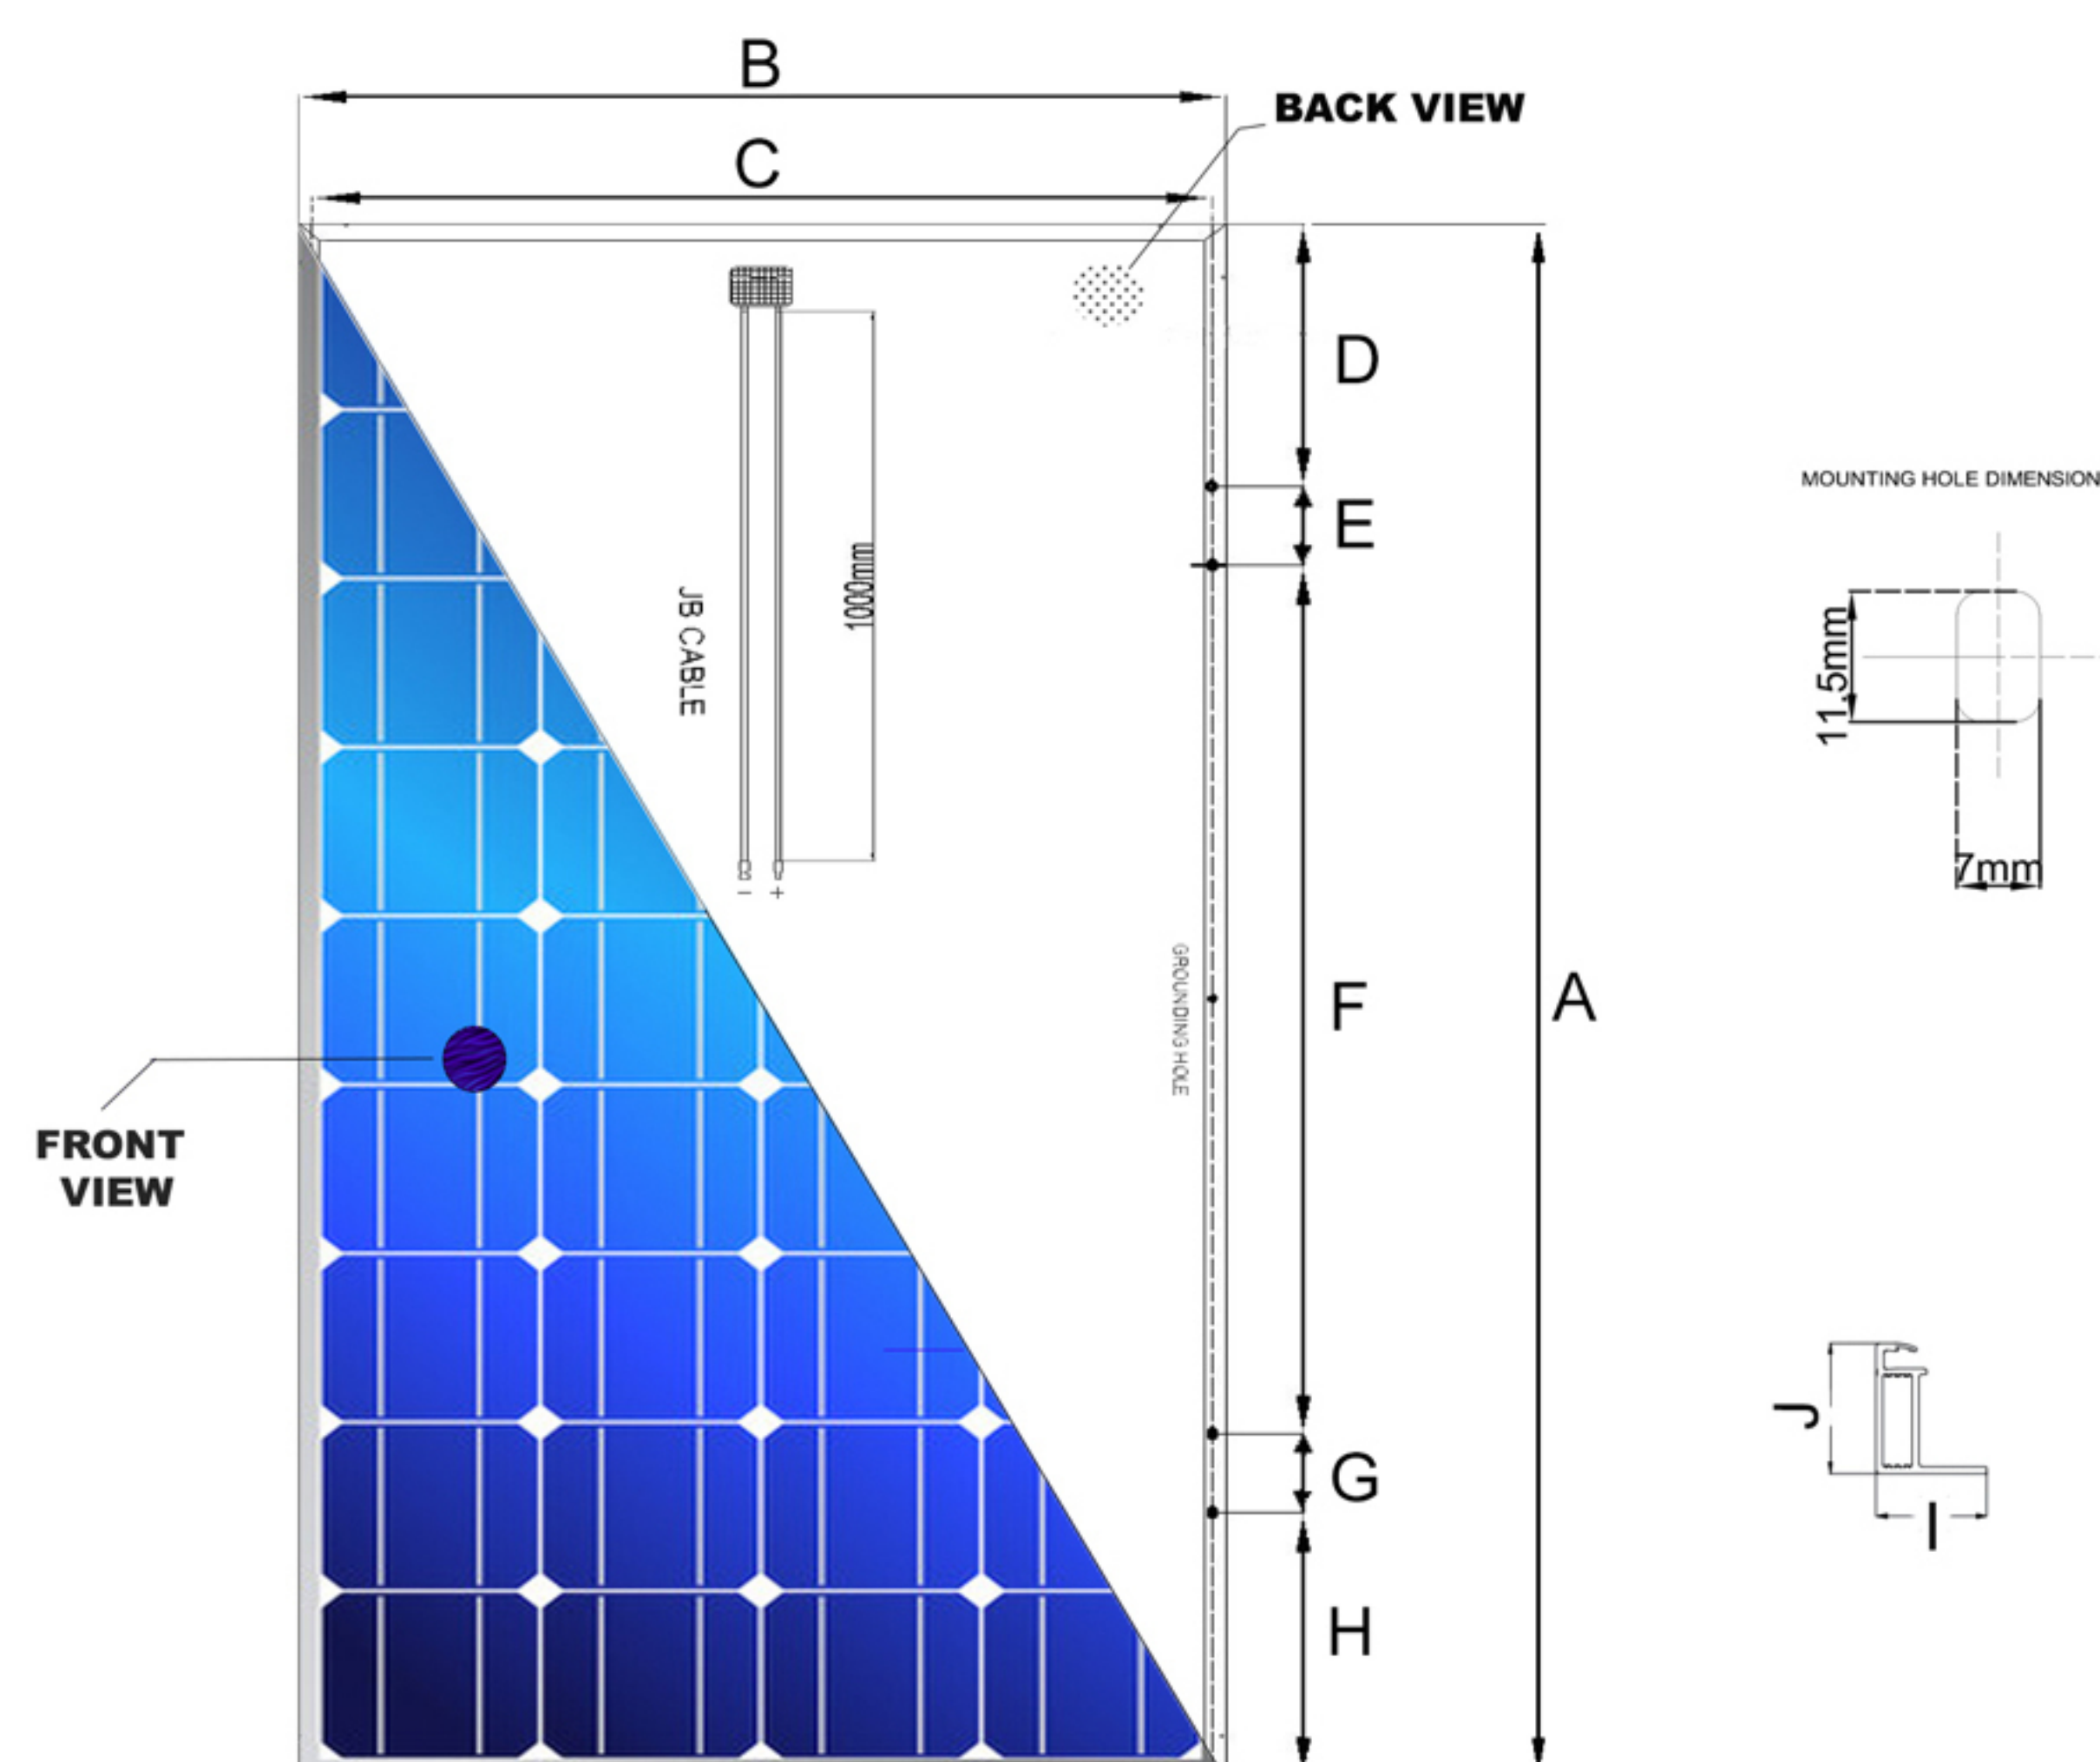


Module & Hole Mounting Dimension

DIMENSION (in mm)	PHOTONM072F24V350	PHOTONM072F24V355	PHOTONM072F24V360	PHOTONM072F24V365	PHOTONM072F24V370	PHOTONM072F24V375	PHOTONM072F24V380
A	1960	1960	1960	1960	1960	1960	1960
B	990	990	990	990	990	990	990
C	955	955	955	955	955	955	955
D	330	330	330	330	330	330	330
E	100	100	100	100	100	100	100
F	1100	1100	1100	1100	1100	1100	1100
G	100	100	100	100	100	100	100
H	330	330	330	330	330	330	330
I	30	30	30	30	30	30	30
J	40/35	40/35	40/35	40/35	40/35	40/35	40/35

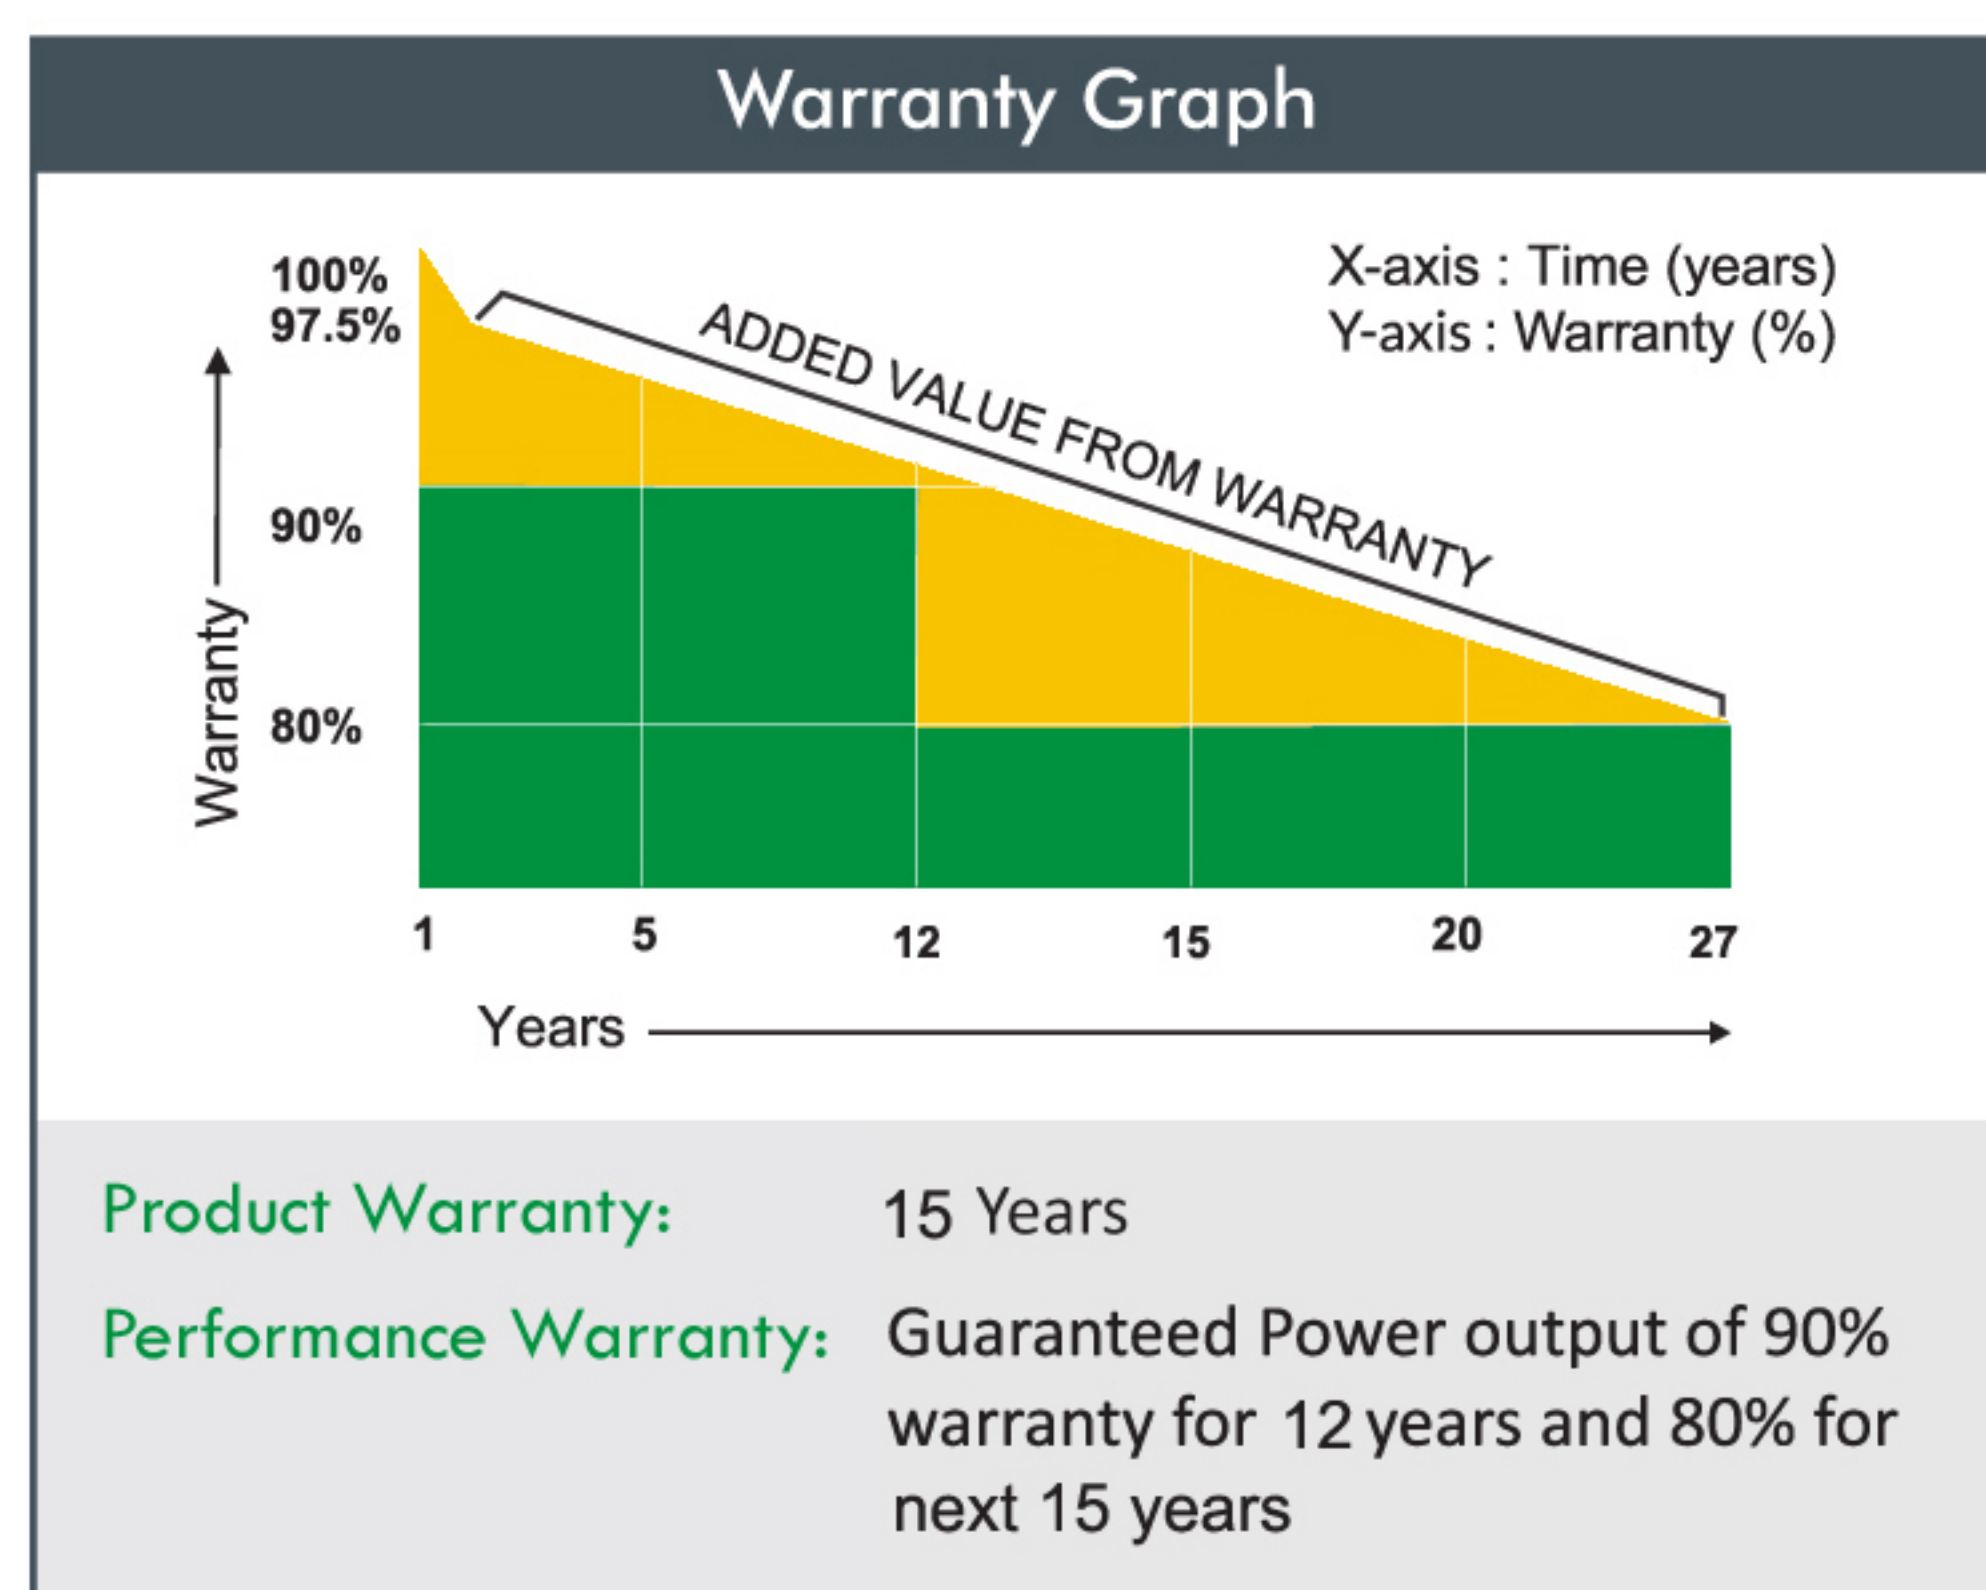

Approvals and Certification	
Products:	IEC 61215 ,ROHS IEC 61730, IEC 61701, CE, UL 1703,
Manufacturing:	ISO 9001:2015, ISO 14001: 2015 ISO 45001:2018

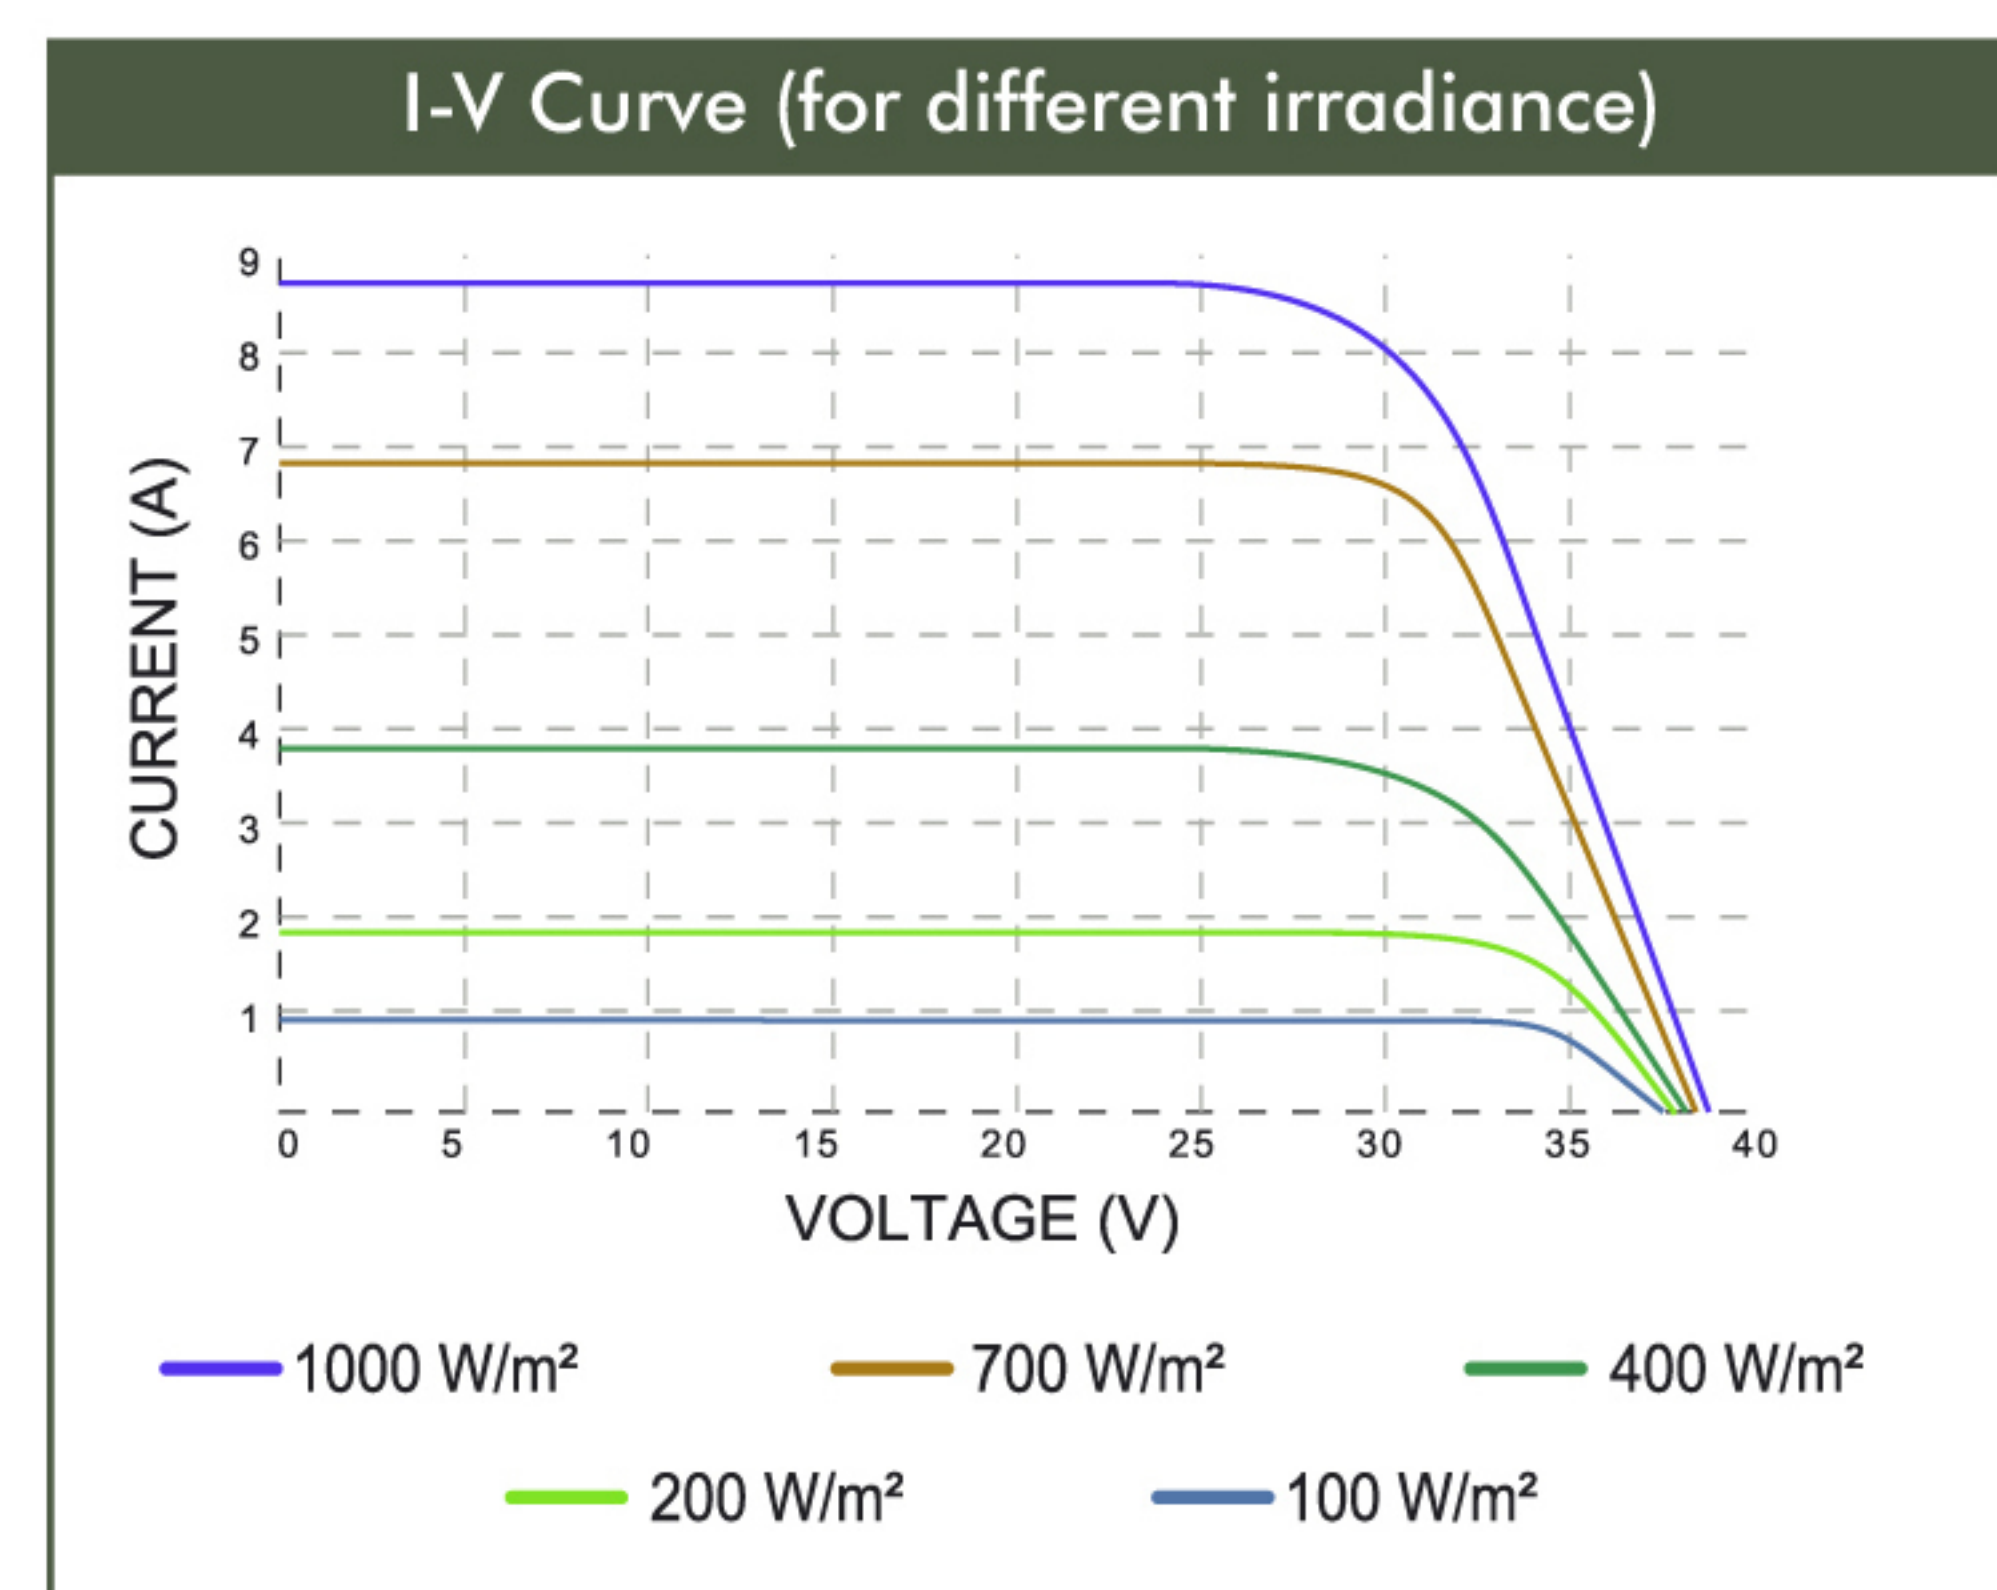

Solar PV Modules


Monocrystalline PERC Solar PV Modules 350-380W



Module & Hole Mounting Dimension

DIMENSIONS (in mm)	WATTAGE						
	350Wp	355Wp	360Wp	365Wp	370Wp	375Wp	380Wp
A	1960	1960	1960	1960	1960	1960	1960
B	990	990	990	990	990	990	990
C	955	955	955	955	955	955	955
D	330	330	330	330	330	330	330
E	100	100	100	100	100	100	100
F	1100	1100	1100	1100	1100	1100	1100
G	100	100	100	100	100	100	100
H	330	330	330	330	330	330	330
I	30	30	30	30	30	30	30
J	35	35	35	35	35	35	35

★ Note:-Dimensions mentioned in this sheet are subject to change without notice.Please confirm the same with Company representative while placing the order.

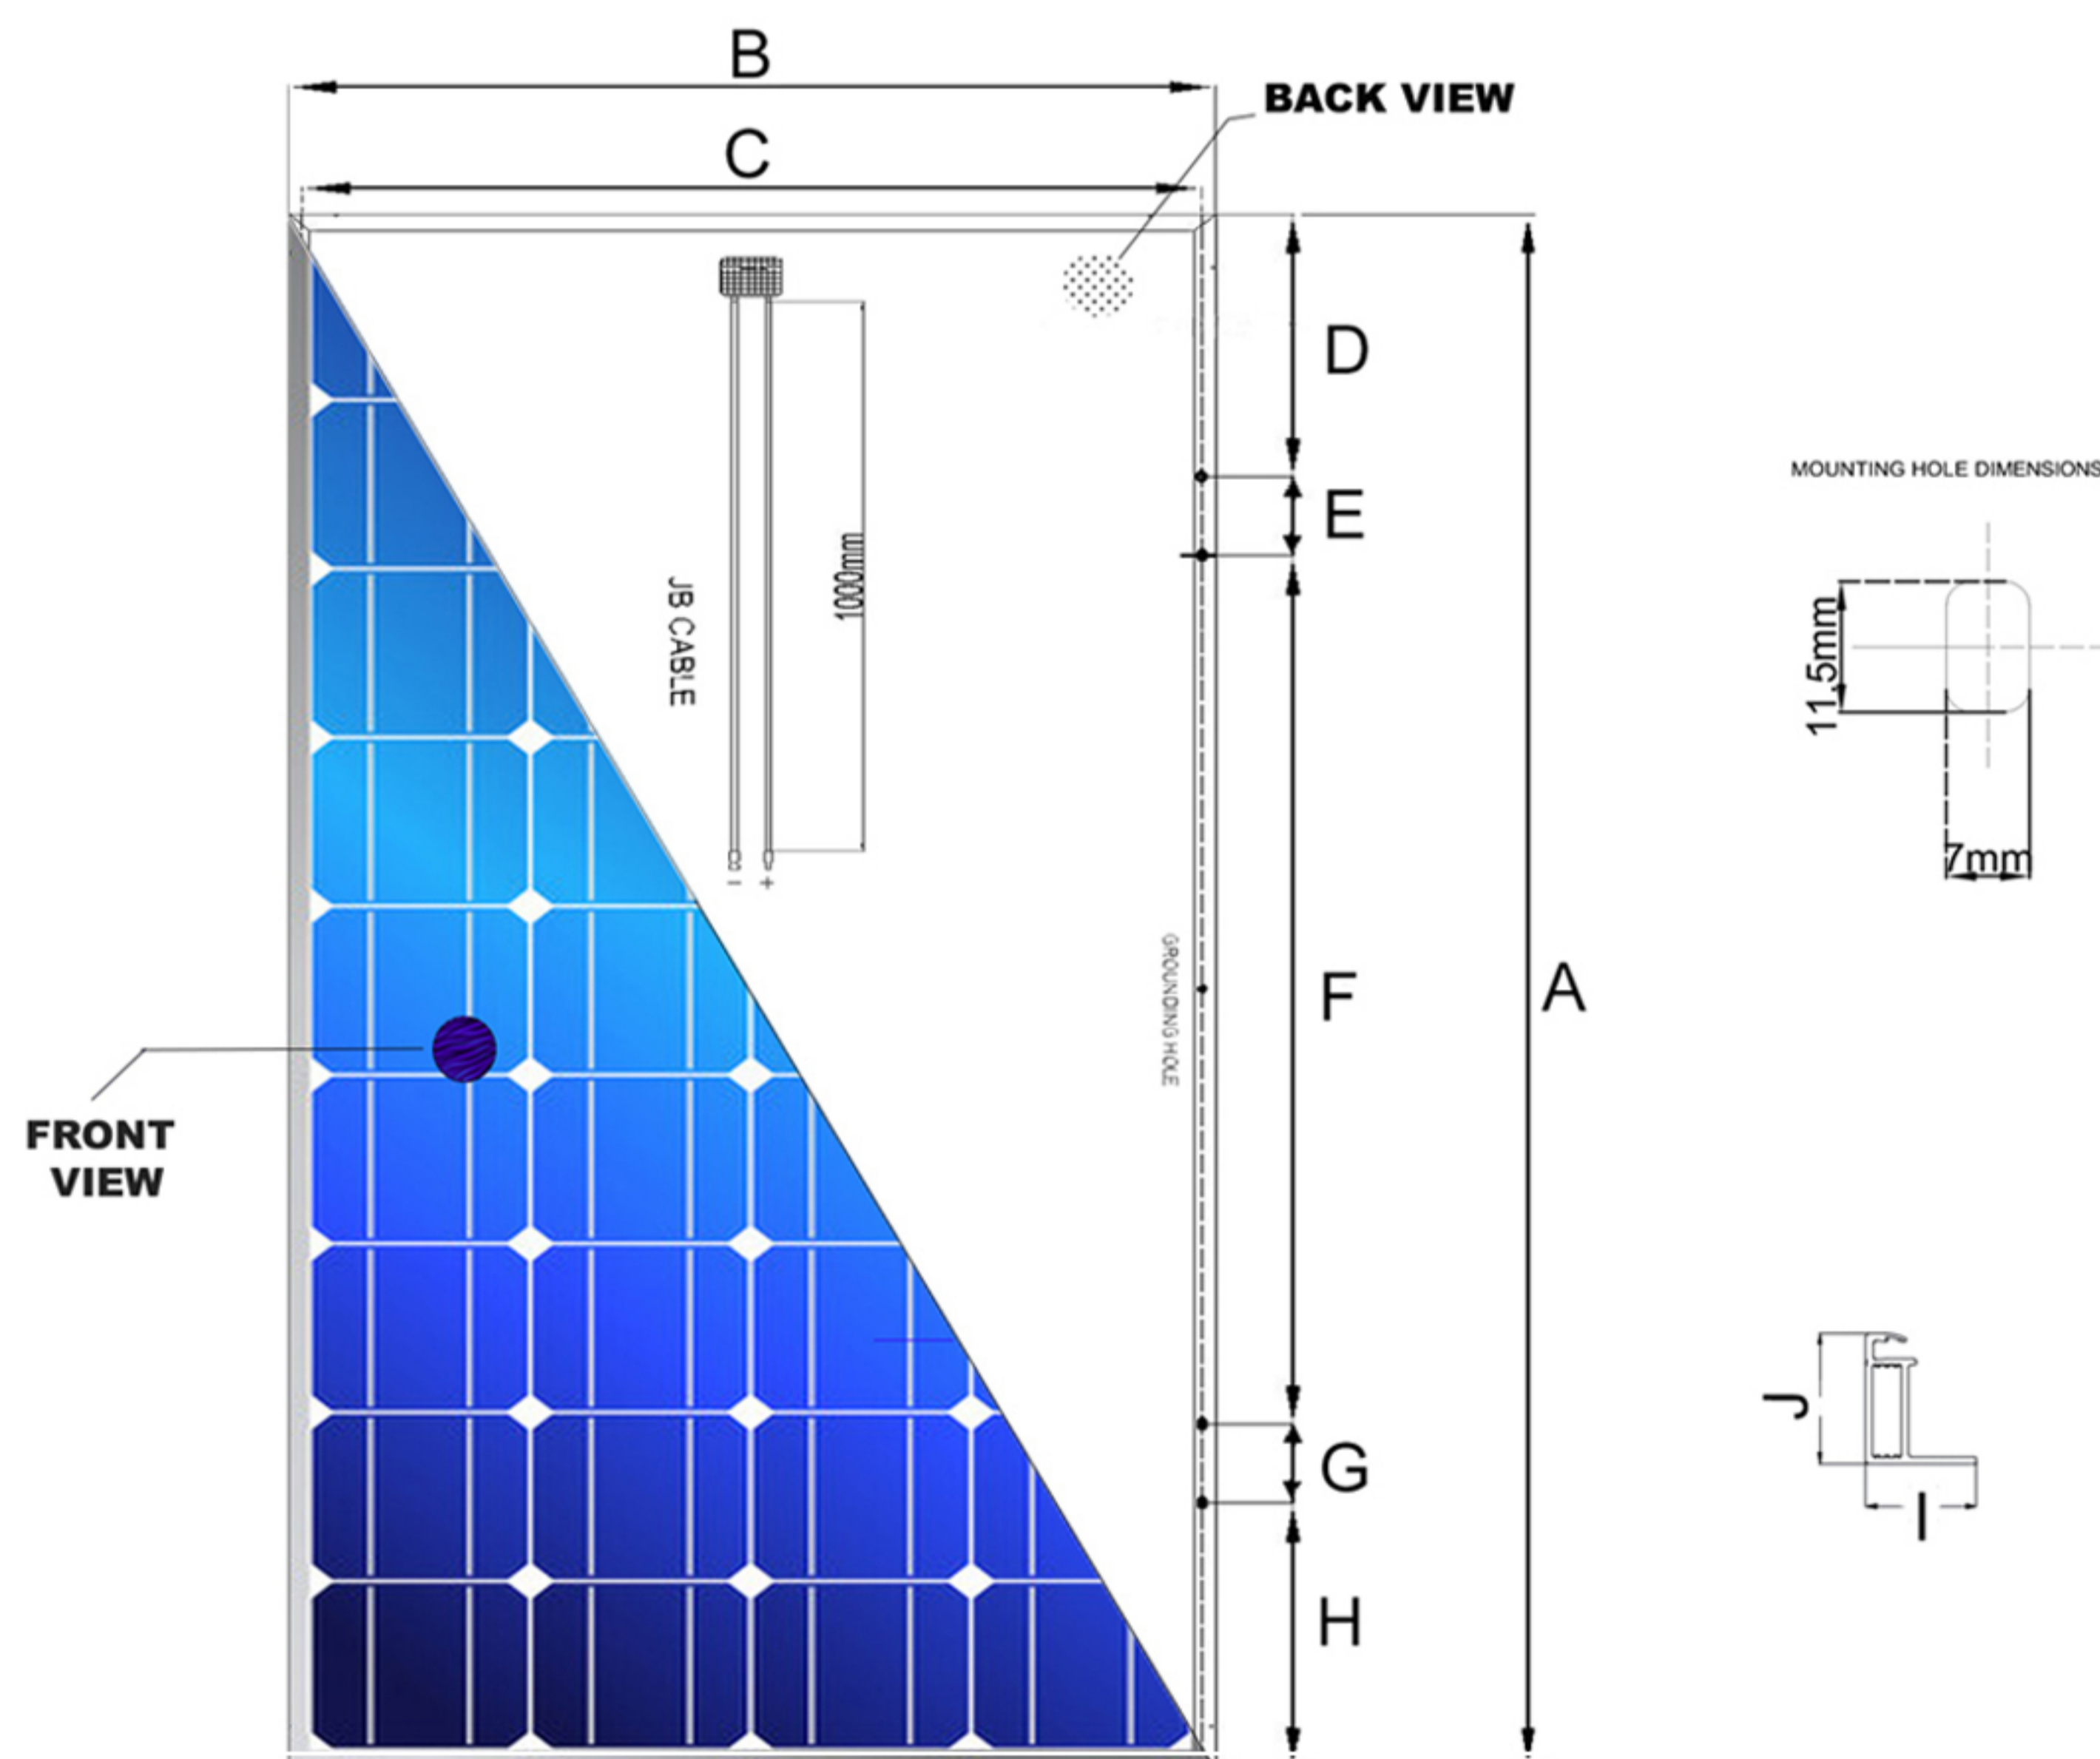

Applications

- Portable mobile charging
- Home lightning System
- Solar lantern
- Street Light Application
- Off-Grid Rooftop Systems



RoHS



PHOTON TECH GENERAL TRADING LLC

Office No: 1708-54C, 17th Floor , IRIS BAY TOWER
 Business Bay, Dubai, UAE. P.O. Box -34076
 Website: www.photontechsolution.com
 Email: info@photontechsolution.com



Customer Care

service@photontechsolution.com

Contact at :

+971 043 83 6999 (Ext-101)

+971 52 523 9064

+971 52 523 9064
 +971 52 239 8851