




# HUGE SOLAR


## HS-M182H660-435-455W

# 435-455W Mono

Suitable for ground power plants and large projects. 182mm silicon wafers with multi-busbar and half-cut cell technologies. Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas. High module quality ensures long-term reliability.

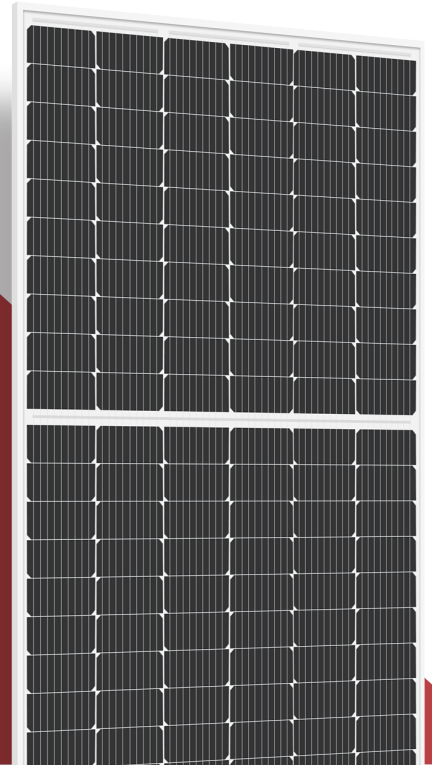

### Linear performance Warranty

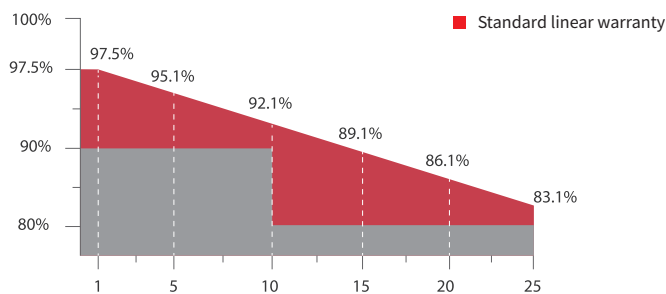

Linear performance warranty



Product warranty

### Comprehensive Certificates

#### CERTIFICATION

- IEC61215/IEC61730
- ISO9001:Quality Management System
- ISO14001:Environmental Management System
- ISO45001:Occupational Health and Safety Management System



QIDONG SHENYA INDUSTRY CO., LTD

Tel : +86-152-50188350 Email : paul@huge-solar.com

Add: 249 Park South Road, Qidong City, Jiangsu Province, China



Electrical Specification (STC\*)

Maximum Power	P <sub>max</sub> (W)	435	440	445	450	455
Maximum Power Voltage	V <sub>mp</sub> (V)	34.16	34.21	34.26	34.31	34.36
Maximum Power Current	I <sub>mp</sub> (A)	12.74	12.87	12.99	13.12	13.25
Open Circuit Voltage	V <sub>oc</sub> (V)	41.38	41.44	41.50	41.56	41.62
Short Circuit Current	I <sub>sc</sub> (A)	13.41	13.55	13.67	13.81	13.95
Module Efficiency	(%)	20.2	20.4	20.6	20.8	21.0
Power Output Tolerance	(W)			0-+5		

\* Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

Electrical Specification (NOCT\*)

Maximum Power	P <sub>max</sub> (W)	323	327	331	335	339
Maximum Power Voltage	V <sub>mp</sub> (V)	31.78	31.83	31.87	31.92	31.97
Maximum Power Current	I <sub>mp</sub> (A)	10.19	10.29	10.39	10.49	10.60
Open Circuit Voltage	V <sub>oc</sub> (V)	39.06	39.12	39.17	39.23	39.29
Short Circuit Current	I <sub>sc</sub> (A)	10.83	10.94	11.04	11.15	11.26

\* Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

Number of Cells	120 Cells (6x20)
Dimensions of Module L*W*H (mm)	1908x1134x35mm (75.11x44.64x1.38 inches)
Weight (kg)	24.0 kg
Glass	High transparency solar glass 3.2mm (0.13 inches)
Backsheet	White
Frame	Silver, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> [0.006 inches <sup>2</sup> ], 300mm (11.8 inches)
Number of diodes	3
Wind/ Snow Load	2400Pa/ 5400Pa*
Connector	MC Compatible

\* For more details please check the installation manual

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	44±2°C
Temperature Coefficient of I <sub>sc</sub>	+0.048%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.270%/°C
Temperature Coefficient of P <sub>max</sub>	-0.350%/°C

Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC -(H)
Max Series Fuse Rating	25A


Packaging Configuration

Module per box	31 pieces
Module per 40' container	744 pieces

Optional

Connector	<input checked="" type="checkbox"/> MC Original
-----------	-------------------------------------------------

ENGINEERING DRAWINGS

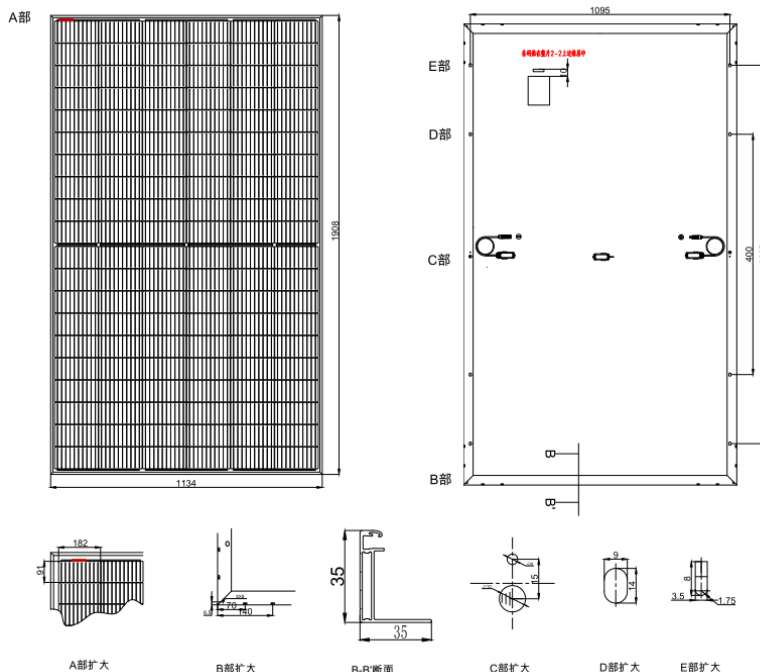

IV CURVES

