

BISOL EasyMount™ Elegant HDPE 200

Quick & easy, no tools required




Technical Specifications


Application	Flat roofs
Roof incline	Up to 5°
Method of installation	No roof penetration
Module angle	20°
Module orientation	Landscape
Module frame tolerances	Length: any / Width: 1,002 mm \pm 3 mm (39.02" \pm 0.2") Thickness: 34 – 41 mm (1.339" – 1.614") Reverse side width: 27 – 32 mm (1.06" – 1.26")
Base color	Carbon black
Base material	High-density polyethylene (HDPE), carbon black, UV-resistant (base) / Glass fibre reinforced polypropylene (screws)
Base weight	5.5 kg (12.1 lbs)
Additional stabilization	Ballast, windshields
Temperature range	-20 – 70°C
Snow load per system	0 – 2.40 kN/m ²

^[1]With the use of ballast and windshields according to the specifications.

Allowed frame width on the reverse side of the module:

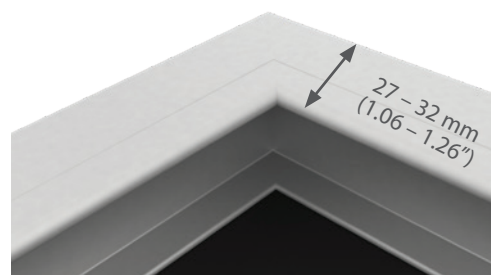

Dimensions of Elegant HDPE 200:

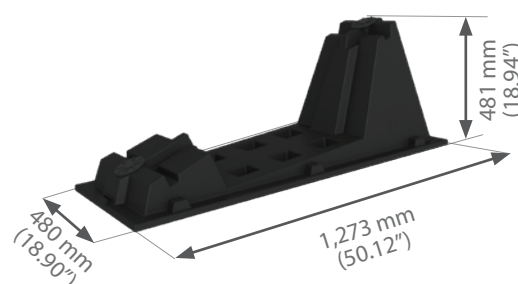

Watch a short
installation
guide video



DEVELOPED IN
COOPERATION WITH
University of Ljubljana
Faculty of
Mechanical Engineering



8x faster
installation



No tools
required



Project and
design tools
available



Lightweight
and stackable



Efficient
cooling




Low installation
cost



Fun facts about BISOL EasyMount™ Elegant HDPE 200

Our designers thoughtfully chose the high-quality materials of the BISOL EasyMount™ Elegant HDPE 200, which are completely recyclable and friendly to the environment.

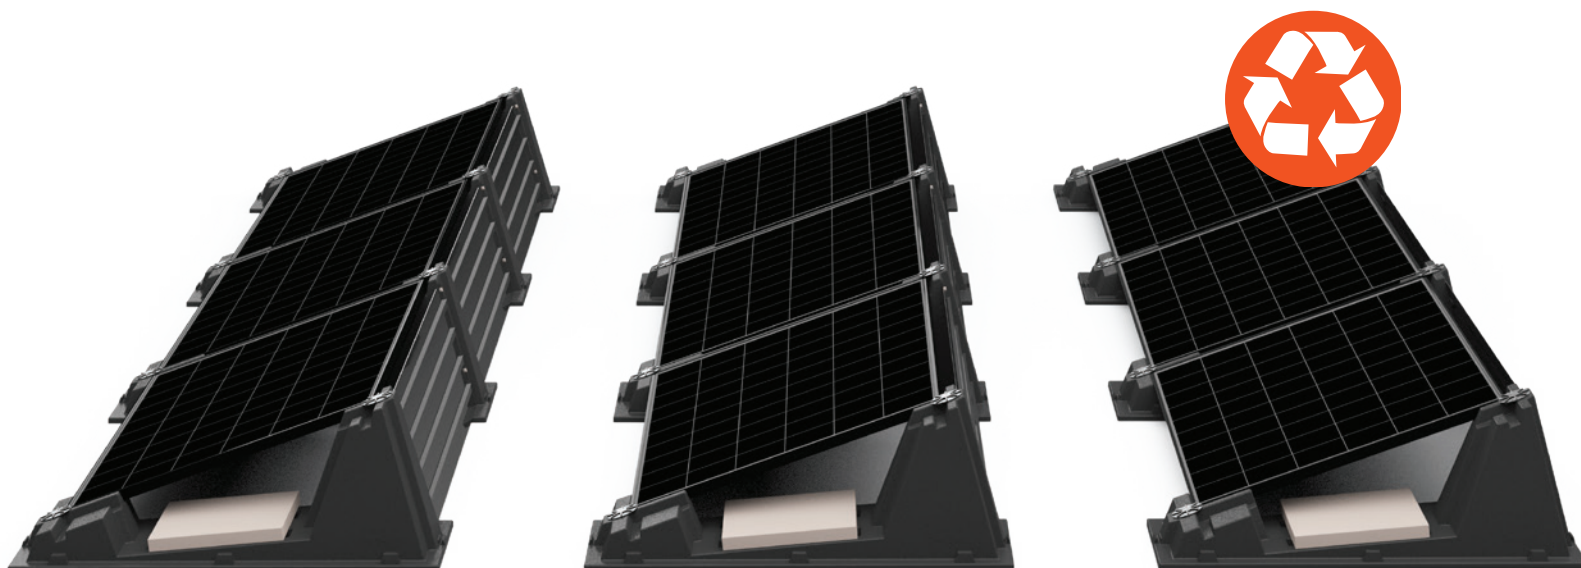

Did you know?

BISOL Group is the first and only solar company in the world that has developed the perfect solar PV module with 100% output power guarantee for 25 years of operation: **BISOL Supreme™**.

To relax and fully enjoy the comfort of BISOL Supreme™, apply for BISOL Supreme™ Cashback and be rewarded when buying the most luxurious and high performance product available in the world.



BISOL Supreme™

THE ONE AND ONLY
with **100% output
power guarantee**



Get your **BISOL Supreme™ Cashback**

