

**TracksunSolar,
For Our Future!**

***SUPER QUALITY*
HIGH EFFICIENCY
*STRONG POWER***


TS-280P-60/ Polycrystalline 60 cells

1 Reliable Quality

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Modules binned by current to improve system performance
- Potential Induced Degradation (PID) Resistant

2 Superior Warranty

- 10-year product warranty
- 25-year linear power output warranty

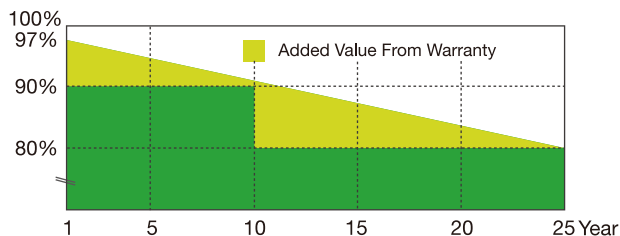

3 Key features



Polycrystalline modules designed for commercial and solar farm grid-tied applications



High power output and highest conversion efficiency



Anti-reflective and anti-soiling surface reduces power loss from dirt and dust



Outstanding performance in low-light irradiance environments



Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and snow loads (5400Pa)



High salt and ammonia resistance certified by TÜV NORD




Mechanical Parameters

Cell (mm)	Poly 156x156
Weight (kg)	18 (approx)
Glass Thickness	4/3.2mm
Dimensions (LxWxH) (mm)	1640x992x35
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	60 (6x10)
Junction Box	IP67
Connector	MC4 Compatible
Packaging Configuration	26 Per Pallet

Working Conditions

Maximum System Voltage	DC 1000V (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	15A
Maximum Static Load, Front (e.g., snow and wind)	5400Pa (112 lb/ft ²)
Maximum Static Load, Back (e.g., wind)	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Application Class	Class A

Engineering Drawings

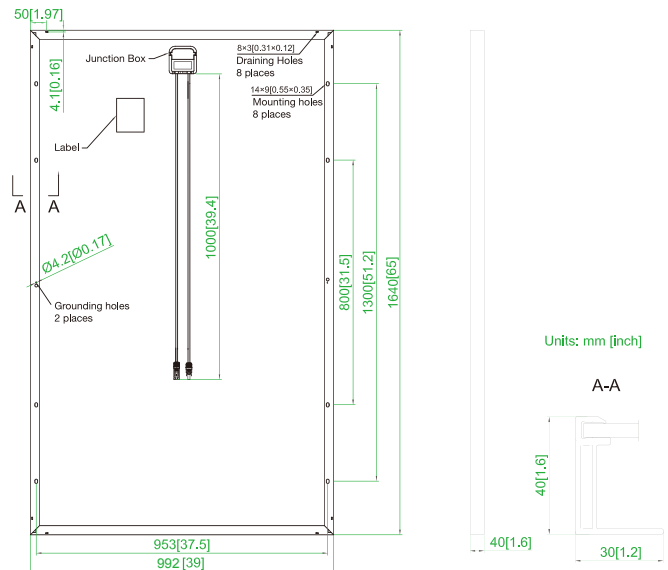

Electrical Parameters

Module	TS-265P-60	TS-270P-60	TS-275P-60	TS-280P-60	TS-285P-60
Rated Maximum Power at STC (W)	265	270	275	280	285
Open Circuit Voltage (Voc/V)	38.14	38.30	38.46	38.85	38.95
Maximum Power Voltage (Vmp/V)	30.89	31.21	31.54	31.88	32.19
Short Circuit Current (Isc/A)	9.10	9.16	9.22	9.33	9.43
Maximum Power Current (Imp/A)	8.58	8.65	8.72	8.78	8.85
Module Efficiency [%]	16.21	16.51	16.82	17.12	17.55
Power Tolerance (W)			-0~+5W		
Temperature Coefficient of Isc (αIsc)			+0.058%/°C		
Temperature Coefficient of Voc (βVoc)			-0.330%/°C		
Temperature Coefficient of Pmax (γPmp)			-0.410%/°C		
STC	Irradiance 1000W/m ² , Cell Temperature 25°C, Air Mass 1.5				

I-V Curve

