


495W-505W

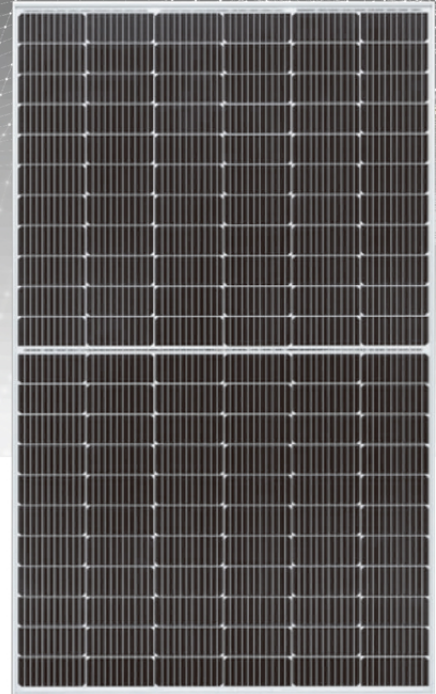

XP-505W-66MDH

High Efficiency Half- Cell Mono PERC Module
The solar cells made of silicon

Comprehensive Products and System Certificates

- OHSAS 1 8001: Occupational Health and Safety Management System
- ISO 1 4001: Environmental Management System
- ISO 9001: Quality Management System




Linear Performance Warranty

15 YEARS

Product quality & process guarantee

25 YEARS

Linear power guarantee

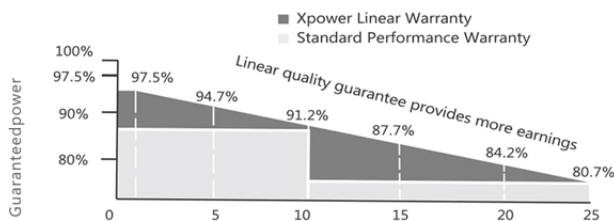

Product Insurance



Half-cut cell technology
New circuit design
lower internal current, lower Rs loss



3 times EL test to ensure best quality



Resistant to salt-spray corrosion
(IEC61701, certified to TUV Rheinland test standard)



Special circuit design
With much lower hot spot temperature



Resistant to power
Attenuation passed TUV Rheinland system voltage endurance test




Special cell process ensures great performance under low irradiance conditions


XP-(495W-505W)-66MDH

Monocrystalline Module

DESIGN

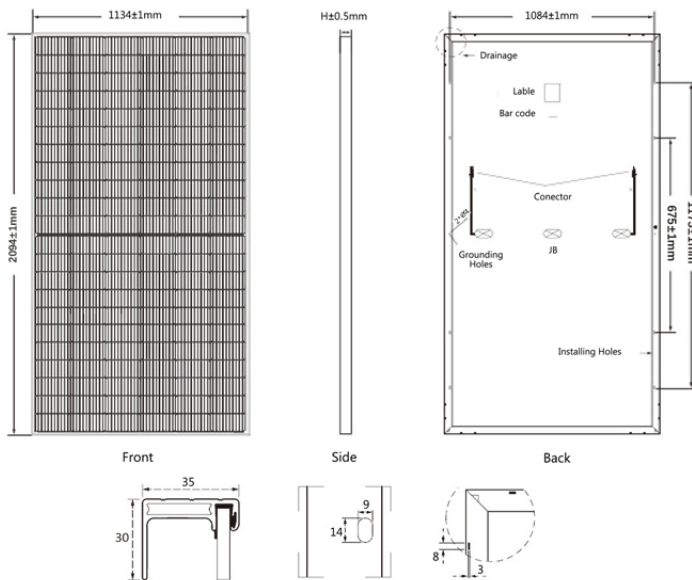

Current-Voltage & Power-Voltage Curves(505W)

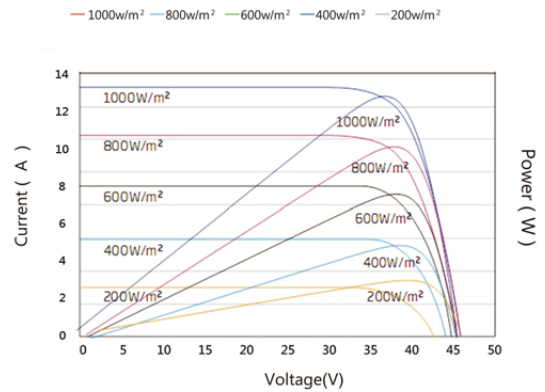

STRUCTURAL CHARACTERISTICS

Module dimensions (L*W*H)	2094 x 1134 x 35 mm
Weight	26.0 kg
Number of cells	132 cells
Cell	PERC Monocrystalline 182 x 91mm
Glass	Tempered 3.2mm AR, High transmittance, Low iron
Frame	Anodized aluminium alloy
Junction box	IP68, 3 diodes
Output wire	4.0mm², wire length: 1900mm
Connector	MC4 Compatible
Mechanical load	5400Pa

TEMPERFORMANCE RATINGS

Temperature coefficient (P_{max})	-0.35%/°C
Temperature coefficient (V_{oc})	-0.27%/°C
Temperature coefficient (I_{sc})	+0.05%/°C
Nominal operating cell temperature	45±2°C

PACKAGING CONFIGURATION

Container	40HQ
Quantity/pallet	31
Pallets/container	22
Quantity/container	682

ELECTRIC CHARACTERISTICS

Model of modules	XP-495W-66MDH		XP-500W-66MDH		XP-505W-66MDH	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power – P_{mp} (W)	495	369	500	373	505	376
Open-circuit voltage – V_{oc} (V)	45.34	42.61	45.43	42.71	45.52	42.79
Short-circuit current – I_{sc} (A)	13.78	11.17	13.85	11.24	13.92	11.31
Maximum power voltage – V_{mp} (V)	37.34	34.72	37.41	34.79	37.48	34.86
Maximum power current – I_{mp} (A)	13.26	10.63	13.37	10.73	13.48	10.79
Module efficiency – η_m (%)	20.8%		21.1%		21.3%	
Module efficiency w/m²	208.5W		210.6W		212.7W	
Power tolerance (W)			(0,+5)			
Maximum system voltage (V)			1500V			
Maximum rated fuse current (A)			25A			
Current operating temperature (°C)			-40°C ~ +85°C			

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/S