

M10


PERC

Conventional

AOX 60M10HC 450W-465W


- Based on M10-182mm solar cells.
- Higher module quality ensures long-term reliability
- MBB Technology, better light trapping and current collection to improve module power output and reliability.
- Excellent Anti-PID performance guarantee via optimized mass production process and materials control

WORLD SHINES BECAUSE OF YOU

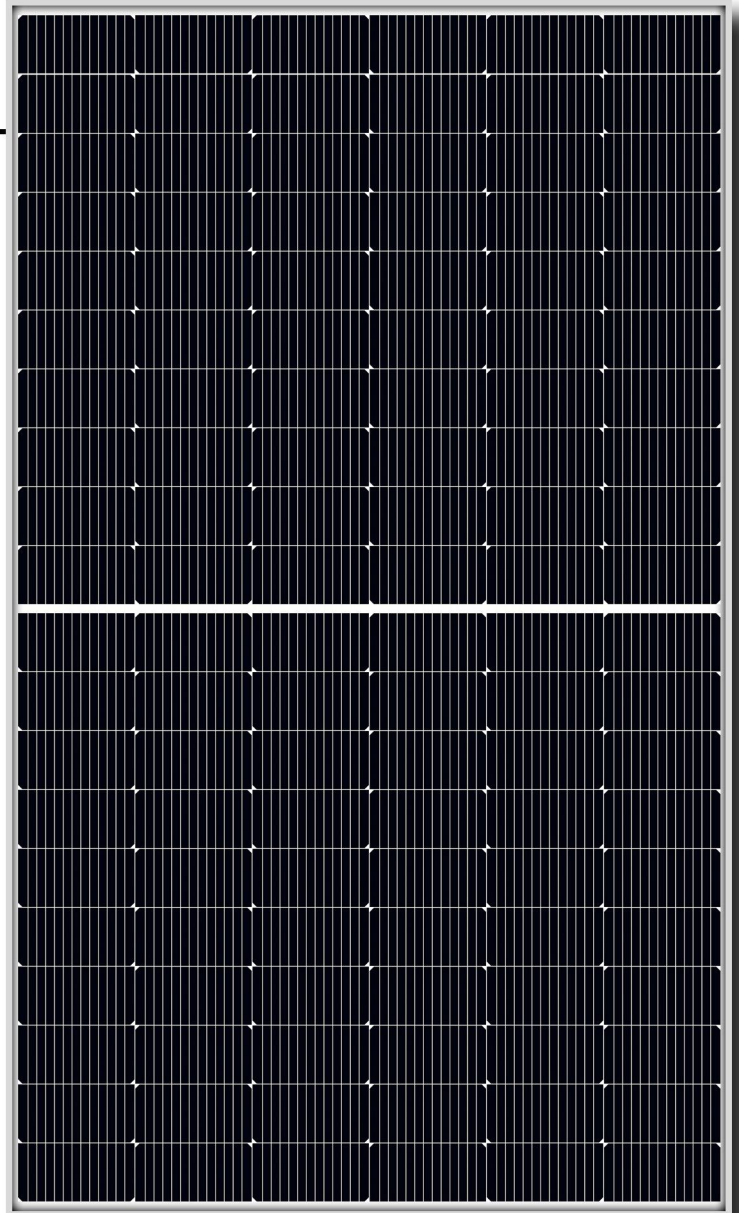

PRODUCT Warranty


12-year Warranty for Materials and Processing
30-year Warranty for Extra Linear Power Output

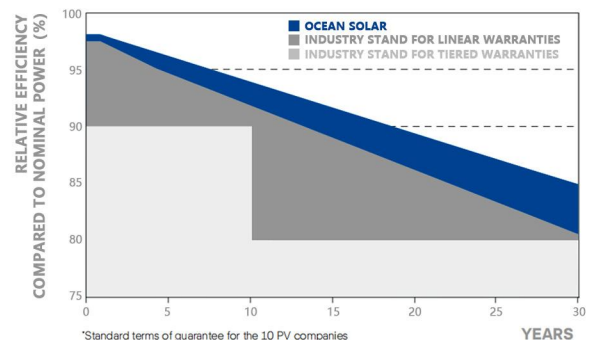

*Standard terms of guarantee for the 10 PV companies with the highest production capacity in 2014 (as at: September 2014)

PRODUCT Certifications



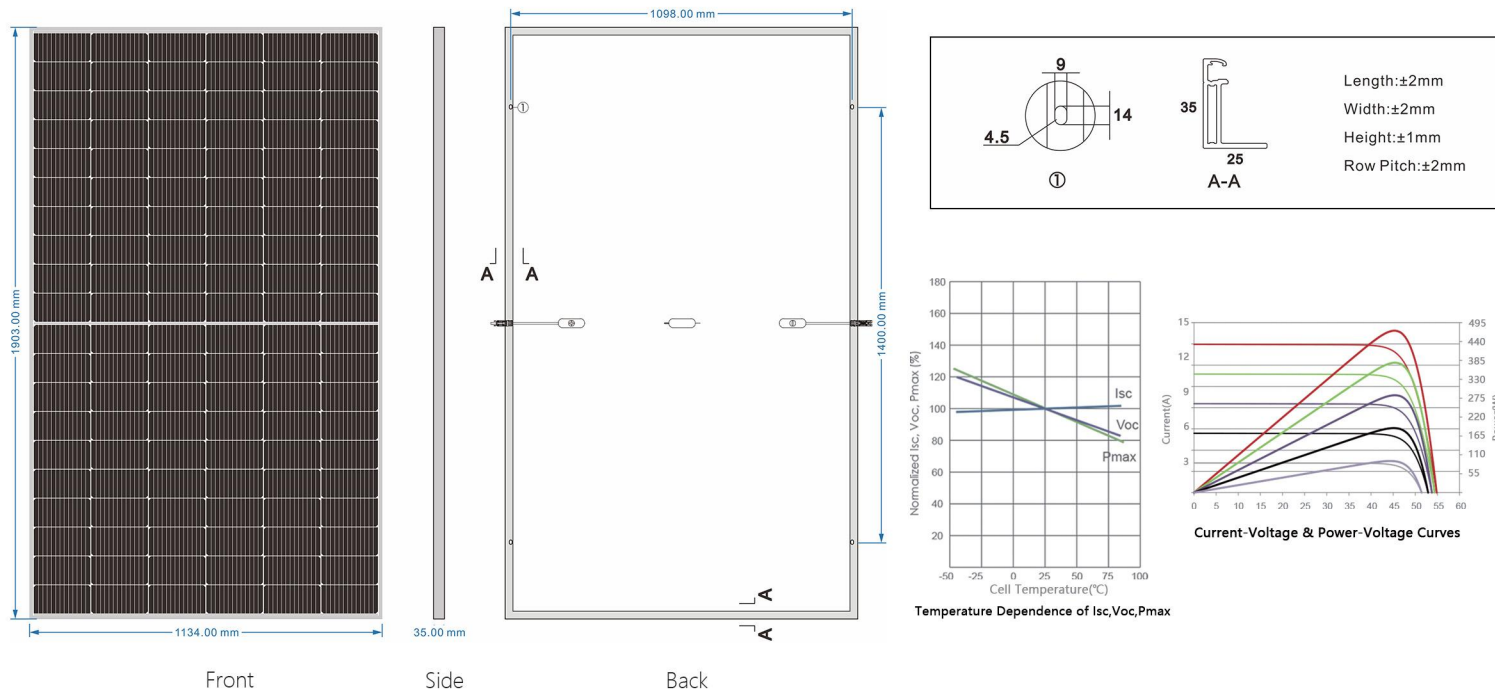

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C

NOCT : AM1.5 800W/m² 20°C 1m/s

Test uncertainty for Pmax: ±3%

Module Type	AOX-60M10HC450W		AOX-60M10HC455W		AOX-60M10HC460W		AOX-60M10HC465W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	450Wp	335Wp	455Wp	339Wp	460Wp	343Wp	465Wp	347Wp
Voltage at Maximum Power (Vmp/V)	33.91V	31.73V	34.06V	31.91V	34.20V	32.07V	34.33V	32.23V
Current at Maximum Power (Imp/A)	13.27A	10.55A	13.36A	10.61A	13.45A	10.67A	13.55A	10.77A
Open Circuit Voltage (Voc/V)	41.18V	38.87V	41.33V	39.01V	41.48V	39.15V	41.63V	39.31V
Short Circuit Current (Isc/A)	13.85A	11.19A	13.93A	11.25A	14.01A	11.32A	14.31A	11.36A
Module Efficiency(%)	20.90%		21.08%		21.32%		21.50%	

Mechanical Parameters

Cell Orientation	6*20 (120) solar half cells
Junction Box	IP 68 3 diodes
Output Cable	4.0mm ² solar cable(IEC) (+)≥350mm (-)≥350mm or customized
Glass	3.2mm, High Transmission, AR Coated Heat Strengthened Glass
Frame	35mm Anodized Aluminium Alloy
Weight	19.2kg
Dimension	1755*1038*35mm
Packaging	31pcs/pallets,858pcs/ 40HQ Container

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Product Warranty

Warranty for Materials and Processing	12 Year
Warranty for Extra Linear Power Output	30 Year

Operating Parameters

Operational Temperature	-40~+85 °C
Power Output Tolerance	0~5W
Voc and Isc Tolerance	±3%
Maximum System Voltage	1000/1500VDC(IEC)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

Temperature Ratings (STC)

Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Product Certifications



Ocean Solar Co.,Ltd

E-mail:info@oceansolar.cn

Web:www.oceansolar.cn

© 2022 Ocean Solar All rights reserved.

Specifications included in this datasheet are subject to change without notice.

