


SLP130-12U

High Efficiency Multicrystalline PV Module

Electrical Characteristics	SLP130-12U
Product code	130011218
Maximum power (Pmax)	130W
Voltage at Pmax (Vmp)	18.86V
Current at Pmax (Imp)	6.9A
Open-circuit voltage (Voc)	23.01V
Short-circuit current (Isc)	7.25A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/ °C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

*NOCT:Nominal operating cell temperature (the data is only for reference)

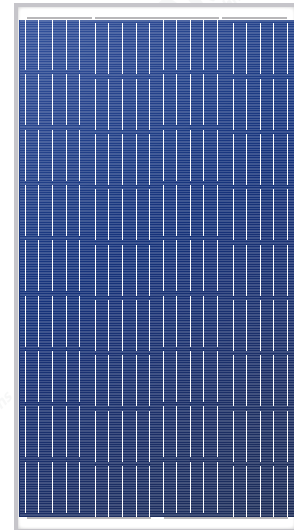


Module Diagram

Dimensions in brackets are in inches.

Un-bracketed dimensions are in millimeters.


Unit: mm[in.]

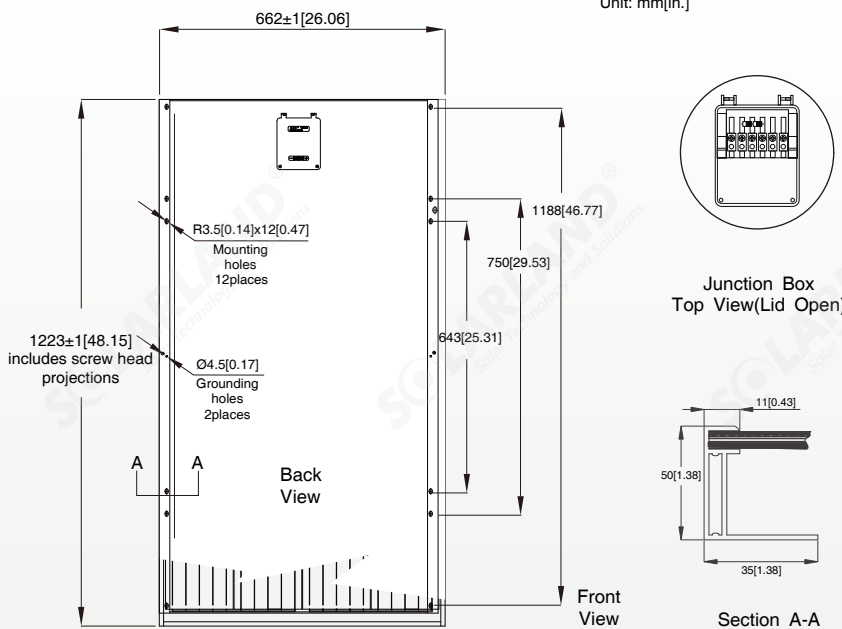

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron,tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

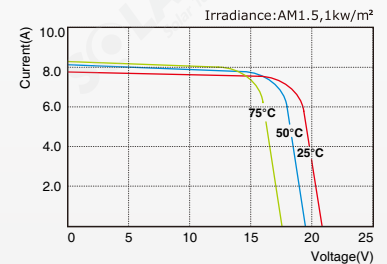

SLP130-12U I-V Curves

Specifications	SLP130-12U
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(4 X 9)
Module dimension	1223mm[48.15in.]x662mm[26.06in.]x50mm[1.38in.]
Weight	10.0kg[24.25lbs]
Packing information(Carton)	1260mm[49.61in.]x700mm[27.56in.]x135mm[5.31in.]/(2pcs/ctn)

*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.