



# Datasheet

## 240Wp — 255Wp



## Monocrystalline solar PV module

Model Number	SN-M240	SN-M245	SN-M250	SN-M255
Maximum Power (pmax)	240Wp	245Wp	250Wp	255Wp
Optimum Operating Voltage/Vmp	30V	30V	30.2V	30.3V
Optimum Operating Current/Imp	8A	8.17A	8.28A	8.42A
Open Circuit Voltage /Voc	36V	36V	36V	36V
Short Circuit Current /Isc	8.6A	8.77A	8.98A	9.12A
Module Efficiency	14.7%	15%	15.3%	15.6%
Power Tolerance (%)				±3
Maximum Series Fuse Rating				15A
Maximum system voltage				1000 V DC


### Maximum Data

Operating Temperature	-40°C~+80°C	°C
Storage temperature	from -40°C ~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m <sup>2</sup> or max Km/h
Surface maximum load capacity	200	Kg/m <sup>2</sup>
Maximum hail load capacity	25mm	80km/h


### EFFICIENCY

-  Low voltage-temperature coefficient allows higher power output at high-temperature condition
-  High efficient, high reliable solar cells ensure our product output stability

## Physical Characteristics

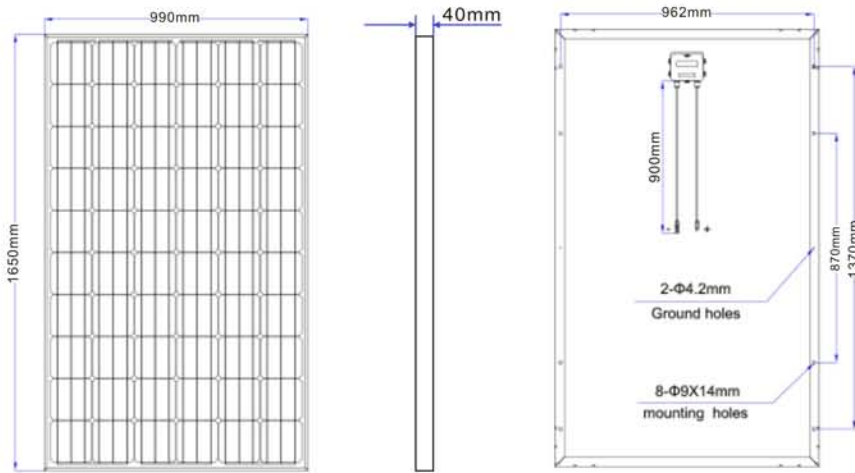

## I-V Curve

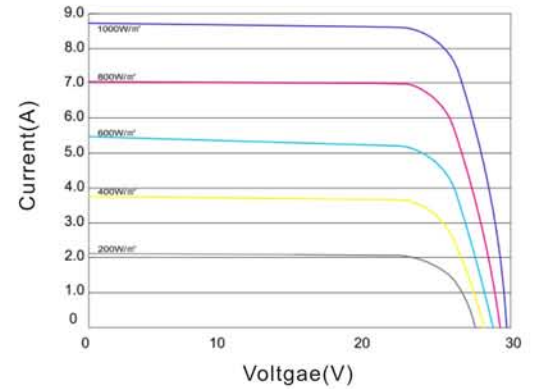

## Laminating Data

Cell dimension (mm)	156 x 156
Dimensions (mm)	1650x990x40
Number of cells	60(6*10)
Weight	19Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65

## STC

AM condition	AM1.5
Intensity of illumination	1000W/m <sup>2</sup>
temperature	25°C

## Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

## Superior Warranty



- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.