



# 380-405 Watt LS-M72

## Full-Cell MBB MONO PERC MODULE



9BB



12BB



### KEY FEATURES



**Multi Busbar Solar Cell**  
Stronger current collection ability, Special circuit design with much lower hot spot temperature;



**Module efficiency up to 20.42%**  
Higher power brings lower kilowatt-hour cost, higher lifetime generating capacity, simultaneously lower annual power attenuation;



**PID Resistant**  
Excellent PID resistance at 96 hours (85°C/85%) test, and also can be improved to meet higher standards for the particularly harsh environment;



**Low-Light Performance**  
Excellent power generation performance under Low-Light condition due to multi busbar;




**Anti-Crack**  
Excellent anti-microcracking performance with more balanced interior stress;



**Strength and Durability**  
Certified for 5400Pa snow and 2400Pa loads test;

### Linear Performance Warranty

12 Years Product Warranty · 25 Years Linear Power Warranty

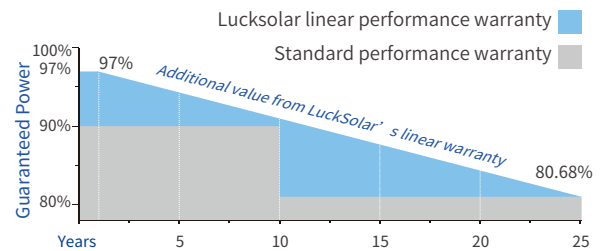

### Product And Quality Certifications

ISO 9001:2008  
ISO 14001:2004  
OHSAS 18001:2007



HQ: No.99, Longxi Avenue, Zhulin Town, Jintan District, Changzhou. Division: No.16, Zhouzhuang Technology Park, Jiepai Town, Binhai County, Yancheng.

Luck Solar is the world's leading green energy provider, committed to making clean energy illuminate every corner of the world. We strive to provide high-efficiency, high-quality and low-cost clean energy solutions. Luck Solar insists on continuous innovation around customer needs. We invest heavily in technology research, and promotes green energy in the world.

+86 519 68905758  
service@lucksolar.com  
www.lucksolar.com

## ELECTRICAL SPECIFICATIONS

Module Type	LS-M72-380		LS-M72-385		LS-M72-390		LS-M72-395		LS-M72-400		LS-M72-405	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated output (Pmp/Wp)	380	282.22	385	285.98	390	288.97	395	292.76	400	296.58	405	300.42
Rated voltage (Vmp/V)	39.80	36.70	39.98	36.90	40.17	37.00	40.35	37.20	40.53	37.40	40.71	37.60
Rated current (Imp/A)	9.55	7.69	9.63	7.75	9.71	7.81	9.79	7.87	9.87	7.93	9.95	7.99
Open circuit voltage (Voc/V)	48.20	44.70	48.40	44.90	48.60	45.10	48.80	45.30	49.00	45.50	49.20	45.70
Short circuit current (Isc/A)	10.13	8.19	10.21	8.25	10.29	8.32	10.37	8.39	10.45	8.46	10.53	8.53
Module efficiency (%)	19.16%		19.42%		19.67%		19.92%		20.17%		20.42%	
Power Tolerance (W)	0~+5		0~+5		0~+5		0~+5		0~+5		0~+5	

Standard Test Condition(STC): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM1.5

Nominal Operating Cell Temperature(NOCT): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s

## TEMPERATURE CHARACTERISTICS

NOCT Temperature	45°C ±2°C
Temperature Coefficient (Pmax)	-0.39%/°C
Temperature Coefficient (Voc)	-0.30%/°C
Temperature Coefficient (Isc)	0.06%/°C

## MAXIMUM RATINGS

Maximum system voltage (IEC)	1500V DC
Snow/Wind	5400Pa/2400Pa
Operating Temperature	-40°C ~ +85°C
Maximum series fuse rating	20A

## MECHANICAL SPECIFICATIONS


Cell Type	12BB/9BB MONO 158.75×158.75mm
No. of Cells	72 (6×12)
Dimensions	1979×1002×40mm
Weight	22.5kg
Glass	3.2mm, Low Iron Tempered Glass
Frame	Anodized Aluminium Alloy (silver or black)
Junction Box	IP67/IP68, 3 diodes
Output Cables	4mm <sup>2</sup> , Length 1200mm
Connector type	MC4 compatible

## PACKING CONFIGURATIONS

Per Pallet	27 Pcs
Per 20' GP Container	270 Pcs
Per 40' HQ Container	638 Pcs


## ENGINEERING DRAWINGS

### Engineering Drawings

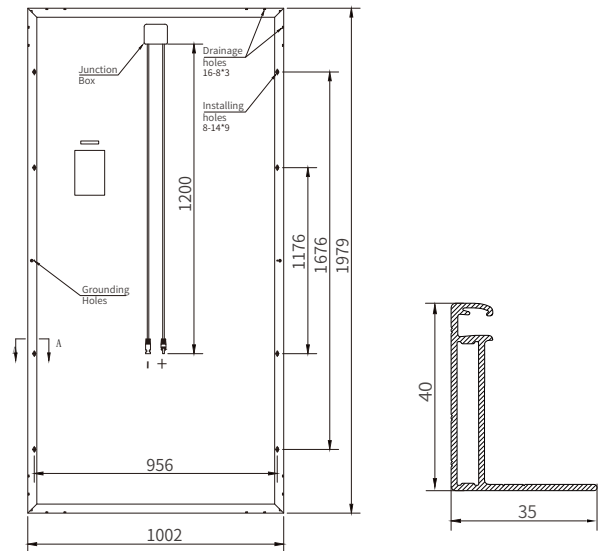

## CURVE & TEMPERATURE DEPENDENCE

### I-V CURVE (390W)

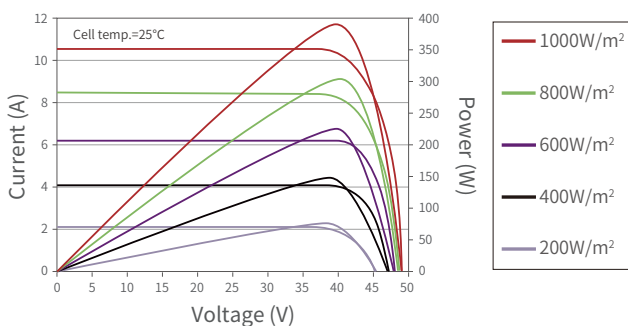

### Current-Voltage curves (390W)

