



# UKSOL




## 30 YEAR BRITISH WARRANTY

### A BRITISH BRAND OF HIGH QUALITY SOLAR MODULES

UKSOL solar PV modules are always produced with the latest high quality grade A solar cells to deliver the maximum return on your investment. Every UKSOL solar module comes with a British 12 year product warranty and a 30 year performance warranty. Technical and warranty support is provided by our dedicated customer care team based near London.

### MODEL UKSOL UKS-6P30 POLYCRYSTALLINE MODULE

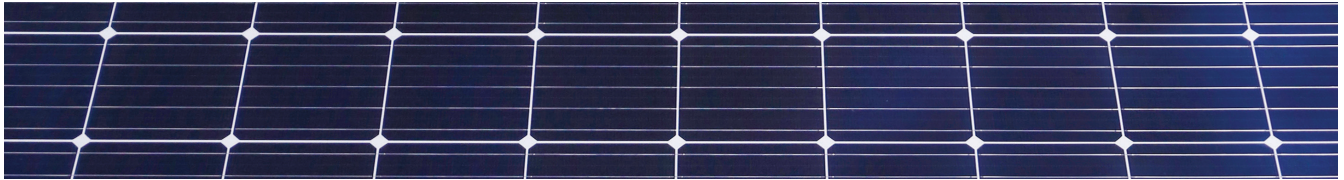

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 17.52% through advanced manufacturing technology.
- Low degradation and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Positive power tolerance of 0 ~ +3 %. High ammonia and salt mist resistance.
- PID Free. Fire tested. Risk free procurement and support from the UK.
- Fully automated production | Special AR gloss coating 5 bus bars for best performance

#### QUALITY CERTIFICATES


TUV Sud tested IEC61215, IEC61730, IEC62716, IEC61701, TUV Sud tested. FIDE Mexico approved. Chile approved. Retie (Colombia). Special PI-Institut Berlin test report SONCAP certificate for Nigeria. InMetro for Brazil Intertek testing for Kenya, Nigeria and Mali



ISO9001:2008: Quality management system  
ISO14001:2004: Environmental management system  
OHSAS18001:2007: Occupational health and safety management system

#### BRITISH WARRANTIES

- 12 year product warranty.
- Limited power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

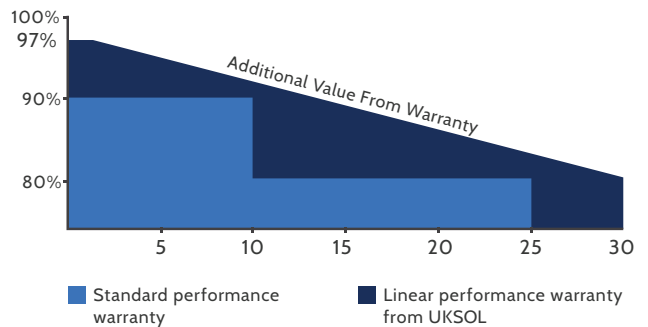

LOW RISK BRITISH PROCUREMENT    BRITISH TECHNICAL SUPPORT    ALWAYS GRADE "A" CELLS    BRITISH QUALITY STANDARDS    BERLIN PI TESTED    TÜV SÜD IEC 61730 IEC 61215 Photo voltages

## ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (Pmax)	260W	265W	270W	275W	280W	285W
Open Circuit Voltage (Voc)	38.2V	38.3V	38.4V	38.5V	38.6V	38.7V
Short Circuit Current (Isc)	8.90A	8.98A	9.09A	9.20A	9.31A	9.42A
Voltage at Nominal Power (Vmp)	30.7V	30.9V	31.1V	31.3V	31.5V	31.7V
Current at Nominal Power (Imp)	8.47A	8.58A	8.69A	8.79A	8.89A	9.00A
Module Efficiency (%)	15.98	16.29	16.60	16.90	17.21	17.52
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1000V DC					
Fire Resistance Rating	Type 1 (UL 1703)/Class C (IEC61730)					
Maximum Series Fuse Rating	15A					
STC : Irradiance 1000W/m <sup>2</sup> , Cell Temperature 25°C, Air Mass 1.5						

## ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (Pmax)	191W	195W	199W	202W	206W	210W
Open Circuit Voltage (Voc)	35.2V	35.3V	35.4V	35.5V	35.6V	35.7V
Short Circuit Current (Isc)	7.21A	7.27A	7.36A	7.45A	7.54A	7.63A
Voltage at Nominal Power (Vmp)	27.9V	28.1V	28.3V	28.5V	28.7V	28.9V
Current at Nominal Power (Imp)	6.85A	6.94A	7.04A	7.09A	7.18A	7.27A
NOCT: Irradiance 800W/m <sup>2</sup> , Ambient Temperature 20°C, Wind Speed 1 m/s						

## MECHANICAL CHARACTERISTICS

Cell Type	Polycrystalline 156x156mm (6x6 inches)
Number of Cells	60 (6x10)
Module Dimensions	1640x992x35mm (64.57x39.06x1.38 inches)
Weight	18kg (39.7 lbs)
Front Cover	3.2mm (0.13 inches) low-iron tempered Glass
Frame	Anodized
Junction Box	IP67, 3 diodes
Cable	4mm <sup>2</sup> (0.006 inches <sup>2</sup> ), 900mm (35.43 inches)
Connector	MC4 or MC4 Compatible



## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C + 2°C
Temperature Coefficient Of Pmax	-0.41% / °C
Temperature Coefficient Of Voc	-0.31% / °C
Temperature Coefficient Of Isc	0.05% / °C

## PACKAGING

Standard Packaging	30 pcs / Pallet
Module Quantity per 20' Container	360pcs
Module Quantity per 40' Container	840/896 HQ


## ENGINEERING DRAWINGS

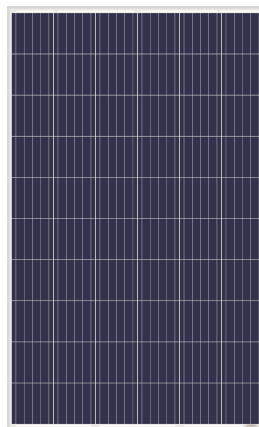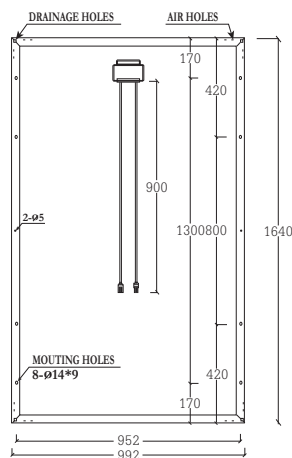


Specifications in this datasheet are subject to change without prior notice.

Also available in all-black.

## IV CURVES

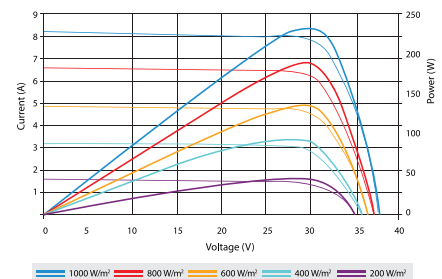

Current-Voltage & Power-Voltage Curves At Different Irradiances

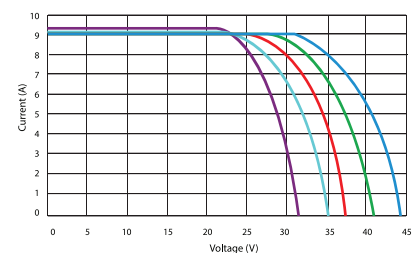

Current-Voltage Curves At Different Temperatures