




C-SI PV MODULE

P35 SERIES

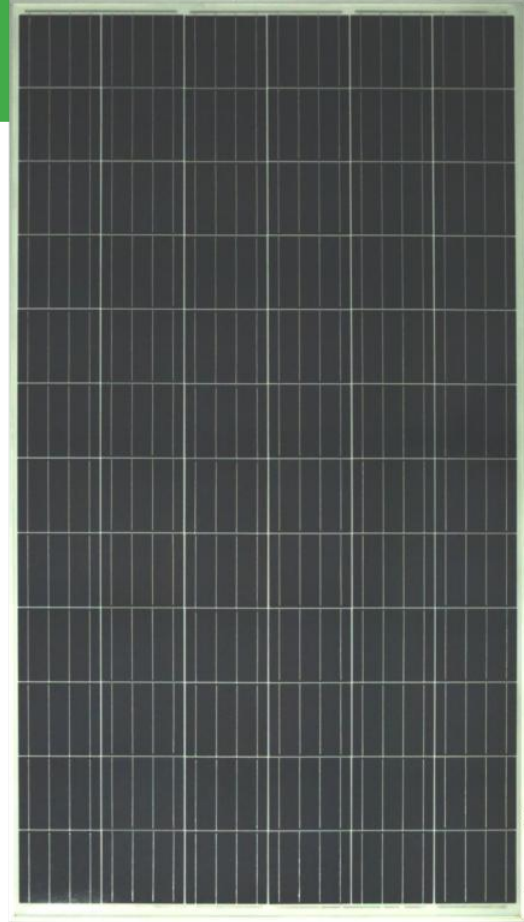

OLI

295/300/305/

310/315

P35



Efficient at Low Light.



Withstands wind load of 2400 Pa.



Positive Power Tolerance.



IP67 Protection Junction Box.



All climate conditions.



**10 years, Product Guarantee.
25 Years Performance
Warrantee.**


Due to continuous improvement in the product the specification may change without notice. However one can visit www.olitec.in for updated module specification and manual for the product.

Made In India

Electrical Data*

Model	OLI295 P35	OLI300 P35	OLI305 P35	OLI310 P35	OLI315 P35
Maximum Rating Power	295 W	300 W	305 W	310 W	315 W
Module Efficiency	15.19 %	15.43 %	15.69 %	15.96 %	16.19 %
Open Circuit Volatage (Voc)	44.64 V	44.74 V	44.74 V	45.1 V	45.1 V
Maximum Power Voltage (Vmp)	36.3 V	36.4 V	36.6 V	37.1 V	37.2 V
Short Circuit Current (Isc)	8.69 A	8.8 A	8.9 A	8.92 A	9.01 A
Maximum Power Current (Imp)	8.13 A	8.24 A	8.33 A	8.36 A	8.46 A

* At STC (Standard Test Condition), 1000W/m² AM 1.5, 25°C.

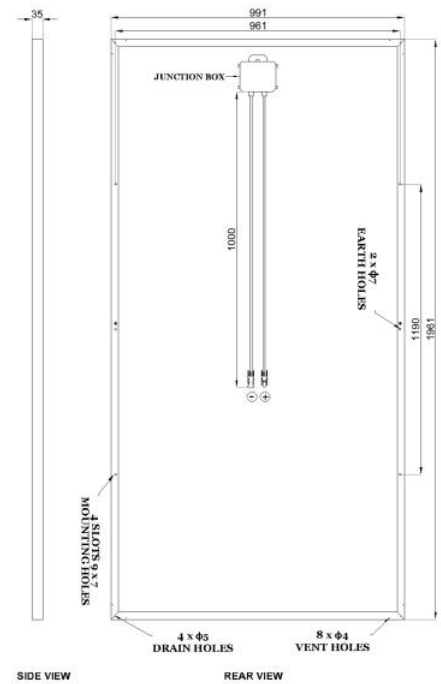


Cell Temperature Coefficients

Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Voc	-0.31%/°C
Temperature Coefficient of Pmax	-0.42%/°C

Physical / Mechanical Properties

Dimension	1961 x 991 x 35mm
Weight (approx.)	21 Kgs
No of Cells	72
Junction Box	IP67, 3 Bypass diode
Cable/Connectors	4mm ² , MC4/MC4
Frame	Anodized Aluminium
Glass	3.2 mm High transmission, Low iron tempered

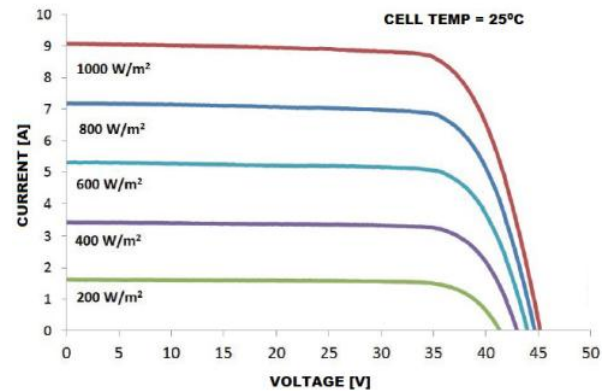

Maximum Rating

Operational temperature	-40 ~ +85°C
Maximum system voltage	1000 VDC
Max series fuse rating	15 A

Certifications

IEC 61215, IEC 61730-1,-2, IEC 61701 Ed.2