

# Smart String Inverter

SUN2000-100KTL-USH0



## Smart

- 12 strings intelligent monitoring and fast trouble-shooting
- Power Line Communication (PLC) supported
- Smart I-V Curve Diagnosis supported

## Efficient

- Max. efficiency 99.0%
- CEC. efficiency 98.5%
- 6 MPPT per unit, effectively reducing string mismatch

## Safe

- DC AFCI compliant to UL 1699B Type I
- Residual Current Monitoring Unit (RCMU) integrated inside
- Fuse free design



## Reliable

- Natural cooling technology
- Protection degree of Type 4X
- Type II surge arresters for both DC and AC

# Smart String Inverter (SUN2000-100KTL-USH0)



Technical Specifications	SUN2000-100KTL-USH0
	<b>Efficiency</b>
Max. Efficiency	99.0%
CEC Efficiency	98.5%
	<b>Input</b>
Max. Input Voltage	1,500 V
Max. Current per MPPT	22 A
Max. Short Circuit Current per MPPT	40 A
Start Voltage	650 V
MPPT Operating Voltage Range	600 V ~ 1,500 V
Full Power MPPT Voltage Range	880 V ~ 1,300 V
Number of Inputs	12
Number of MPP Trackers	6
	<b>Output</b>
AC Active Power	100,000 W
Max. AC Apparent Power	100,000 VA @40°C, 90,000 VA @50°C
Max. AC Active Power (cosφ=1)	100,000 W
Rated Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	60 Hz
Rated Output Current	72.9 A
Max. Output Current	72.9 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 3%
	<b>Protection</b>
DC Arc Fault Circuit Interrupter	Yes, compliant to UL 1699B Type I
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
	<b>Communication</b>
Display	LED Indicators, Bluetooth + APP
RS485	Yes
USB	Yes
Power Line Communication (PLC)	Yes
	<b>General</b>
Dimensions (W x H x D)	1,075 x 605 x 310 mm (42.3 x 23.8 x 12.2 inch)
Weight (with mounting plate)	77 kg (169.8 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Natural Convection
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4
AC Connector	Waterproof PG Terminal + Terminal Clamps
Protection Degree	Type 4X
Topology	Transformerless
	<b>Standard Compliance (more available upon request)</b>
Certificate	UL 1741, UL 1699B, UL 62109-1, CSA C22.2 #107.1-16, FCC Part 15
Grid Code	IEEE 1547, IEEE 1547a

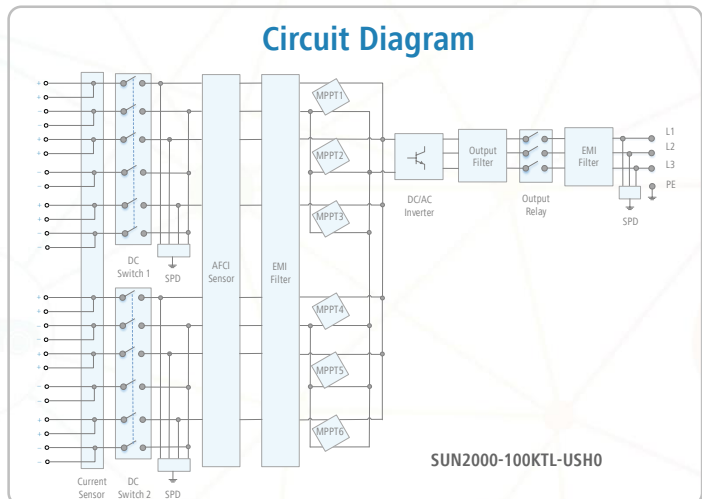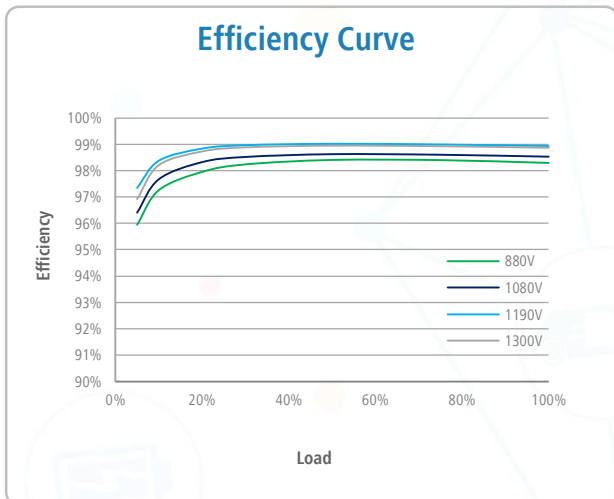

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solar.huawei.com. Version No.:01-(201807)